



Wheel Weight Kit
GrandStand® Multi Force Mower
Model No. 133-5386

Form No. 3405-687 Rev A

Installation Instructions

⚠ WARNING

CALIFORNIA
Proposition 65 Warning

This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

Installation

1

Preparing the Machine

No Parts Required

Procedure

1. Park the machine on a level surface.
2. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
3. Shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.



2



Installing the Kit

Parts needed for this procedure:

| | |
|---|---------------------------|
| 2 | Weight |
| 8 | Adapter nut |
| 8 | Washer |
| 8 | Bolt (1/2 x 3-1/2 inches) |

Procedure

1. Remove the existing 4 lug nuts from a rear tire.
- Note:** Retain the lug nuts for securing the tire if you remove the wheel weight later.
2. Install 4 adapter nuts to the tire.
3. Torque the nuts to 103 to 127 N·m (76 to 94 ft-lb).
4. Install the weight using 4 bolts and 4 washers.
5. Torque the bolts to 103 to 127 N·m (76 to 94 ft-lb).
6. Repeat the procedure for the other rear tire.

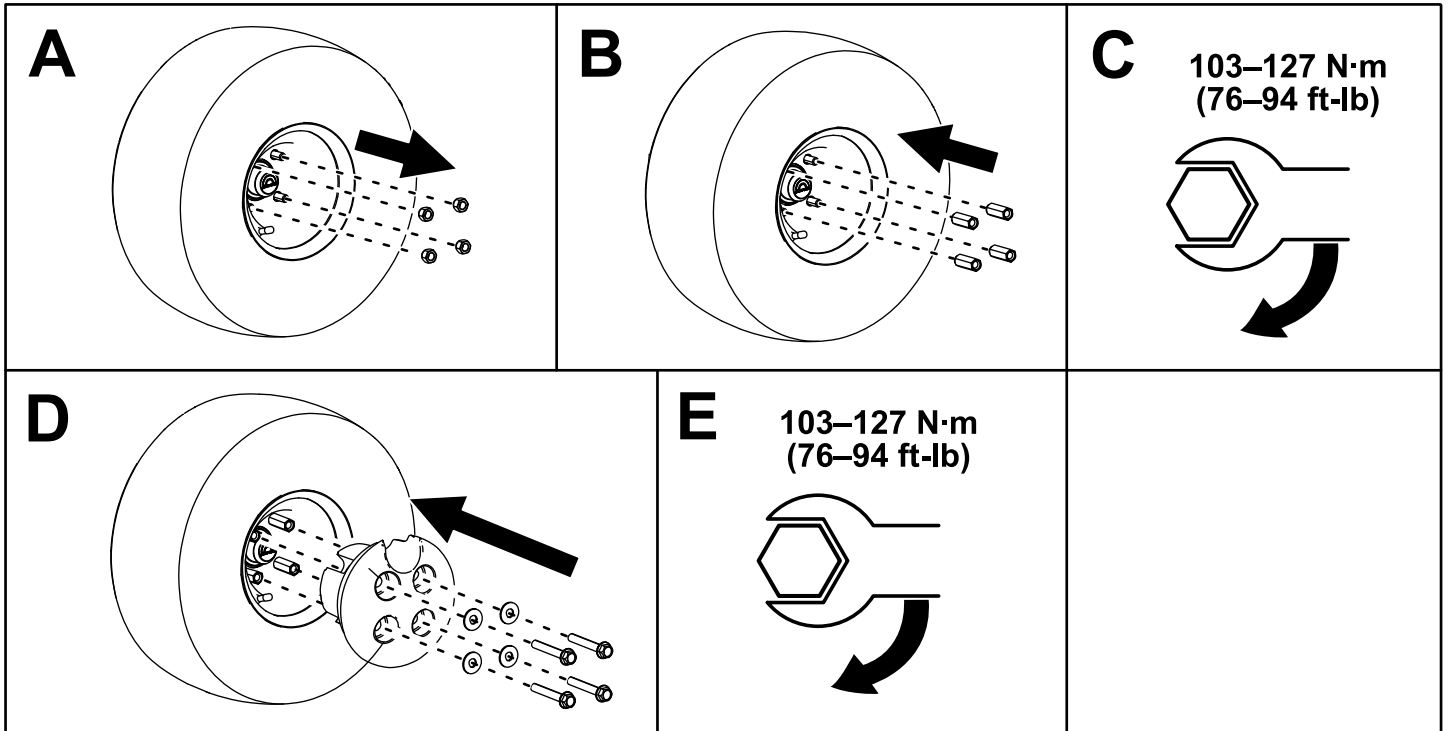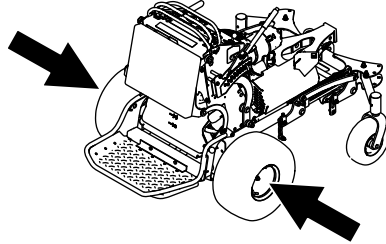

g187914