



Brake Cable Kit

21in Heavy-Duty Recycler®/Rear Bagger Lawn Mower

Model No. 133-2680

Model No. 136-7000

Installation Instructions

Use the appropriate kit for your lawn mower model as follows:

- Lawn mower model no. 22295—kit no. 133-2680
- Lawn mower model no. 22297—kit no. 136-7000

⚠ WARNING

CALIFORNIA Proposition 65 Warning

This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

Installation

Loose Parts

Use the chart below to verify that all parts have been shipped.

Procedure	Description	Qty.	Use
2	Brake cable Cable anchor Screw	1 1 1	Install the brake cable.


1

Removing the Brake Cable

No Parts Required

Procedure

1. Shut off the engine and wait for all moving parts to stop.
2. Disconnect the spark-plug wire from the spark plug.
3. Disconnect the brake cable from the blade-control bar (Figure 1 or Figure 2 as appropriate for your kit); keep the bolt and the nut.

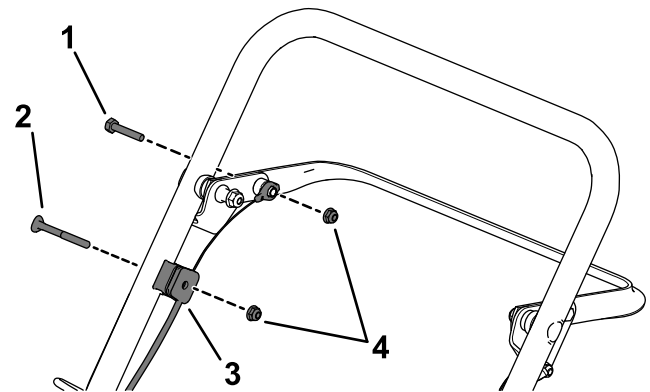


g187498

Figure 1
Kit 133-2680

- | | |
|--------------------|-----------------|
| 1. Bolt (keep) | 3. Cable anchor |
| 2. Screw (discard) | 4. Nut (keep) |



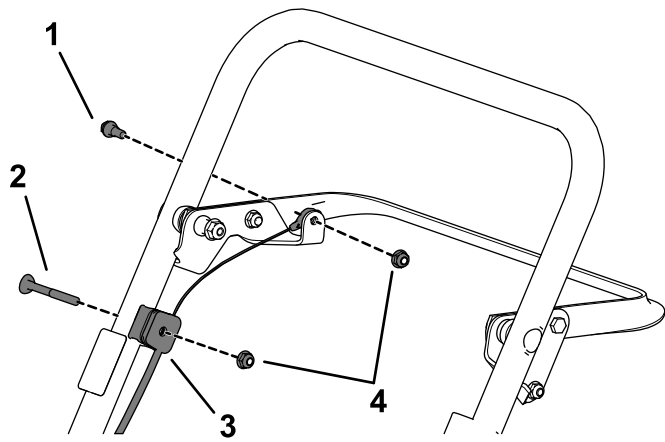


g187414

Figure 2
Kit 136-7000

- | | |
|--------------------|-----------------|
| 1. Bolt (keep) | 3. Cable anchor |
| 2. Screw (discard) | 4. Nut (keep) |


-
4. Disconnect the brake cable from the cable anchor (Figure 1 or Figure 2 as appropriate for your kit); discard the screw, but keep the nut.
 5. Disconnect the brake cable from the engine (Figure 3 or Figure 4 as appropriate for your kit), then discard it.

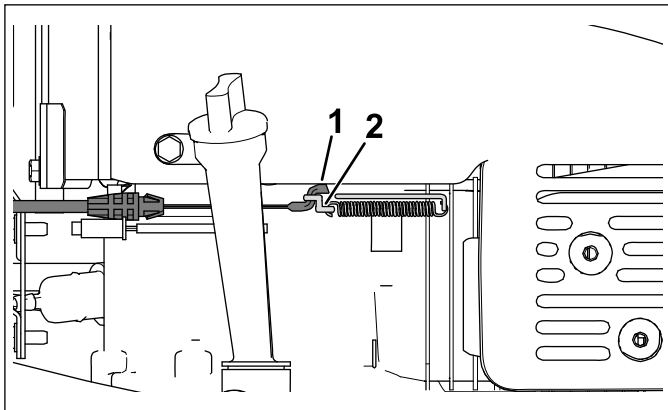

g187780

Figure 3
Kit 133-2680

- | | |
|----------------|-------------------------------|
| 1. Brake cable | 2. Engine connection location |
|----------------|-------------------------------|

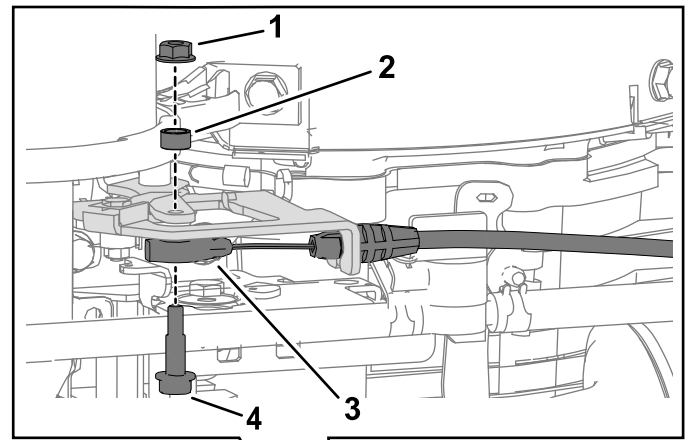

g187634

Figure 4
Kit 136-7000

- | | |
|-----------|----------------|
| 1. Nut | 3. Brake cable |
| 2. Spacer | 4. Bolt |

2

Installing and Adjusting the Brake Cable

Parts needed for this procedure:

1	Brake cable
1	Cable anchor
1	Screw

Installing the Brake Cable

Important: If you are installing this kit on a machine with serial numbers 400000000–999999999, skip steps 1 and 2.

1. Locate the cable anchor's post and cut it at the indicated location on [Figure 5](#).

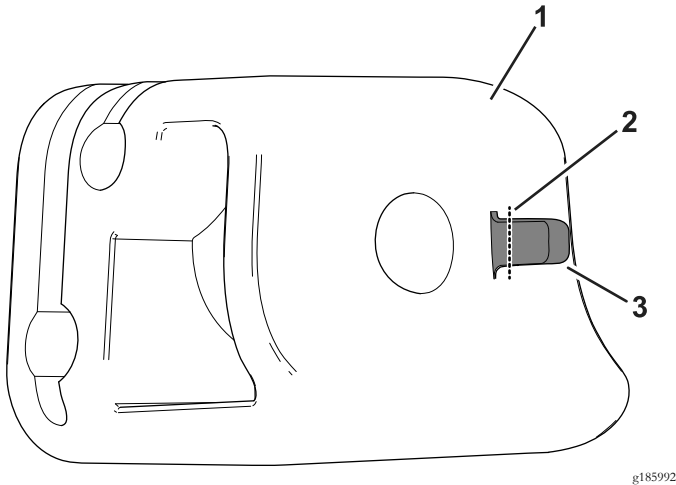


Figure 5

1. Cable anchor
2. Cut location
3. Post

2. Remove the remaining piece of the post from the cable anchor.
3. Attach the cable anchor to the brake cable.
4. Attach the brake cable to the blade-control bar ([Figure 1](#) or [Figure 2](#) as appropriate for your kit) using the bolt and the nut that you previously removed.
5. Secure the cable anchor to the handle ([Figure 1](#) or [Figure 2](#) as appropriate for your kit) using a screw (included in the kit) and the nut that you previously removed.
6. Route the brake cable between the handle and the deck.
7. Attach the brake cable to the engine ([Figure 3](#) or [Figure 4](#) as appropriate for your kit).

Adjusting the Brake Cable

1. Hold the blade-control bar at 19 cm (7-5/8 inches) from the top of the handle as shown in [Figure 6](#).

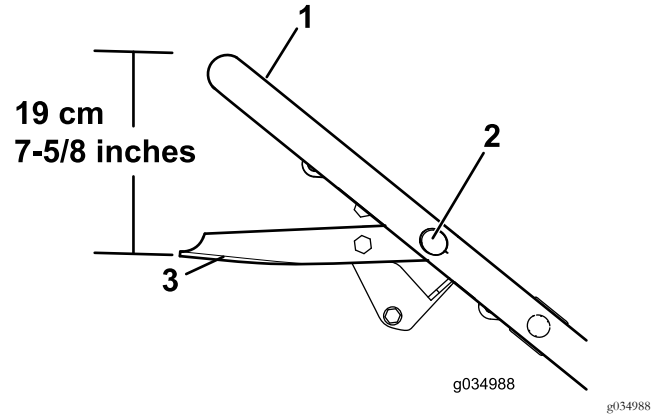


Figure 6

1. Handle
 2. Cable-anchor nut
 3. Blade-control bar
2. Pull down on the cable conduit to remove the slack from the brake cable.
 3. Tighten the cable-anchor nut.
 4. Release the blade-control bar and verify that there is slack in the brake cable.



Count on it.