Form No. 3410-891 Rev A

Kevlar Tires Kit

CT, LT, LT-F, and GM 3400 Series Turf Mowers

Model No. 02912

Model No. 02914

Installation Instructions

Note: Kit Model 02912 is for the traction units CT2240 and kit Model 02914 is for the traction units LT3340, LT-F3000, and GM3400.

⚠ WARNING

CALIFORNIA
Proposition 65 Warning


This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

Preparing the Machine

Park the machine on a level surface, lower the cutting units, shut off the engine, engage the parking brake, and remove the key from the key switch.

Removing the Current Tires

1. Loosen the wheel nuts.
2. Raise the mower; refer to the *Operator's Manual*.
3. Remove the tires.

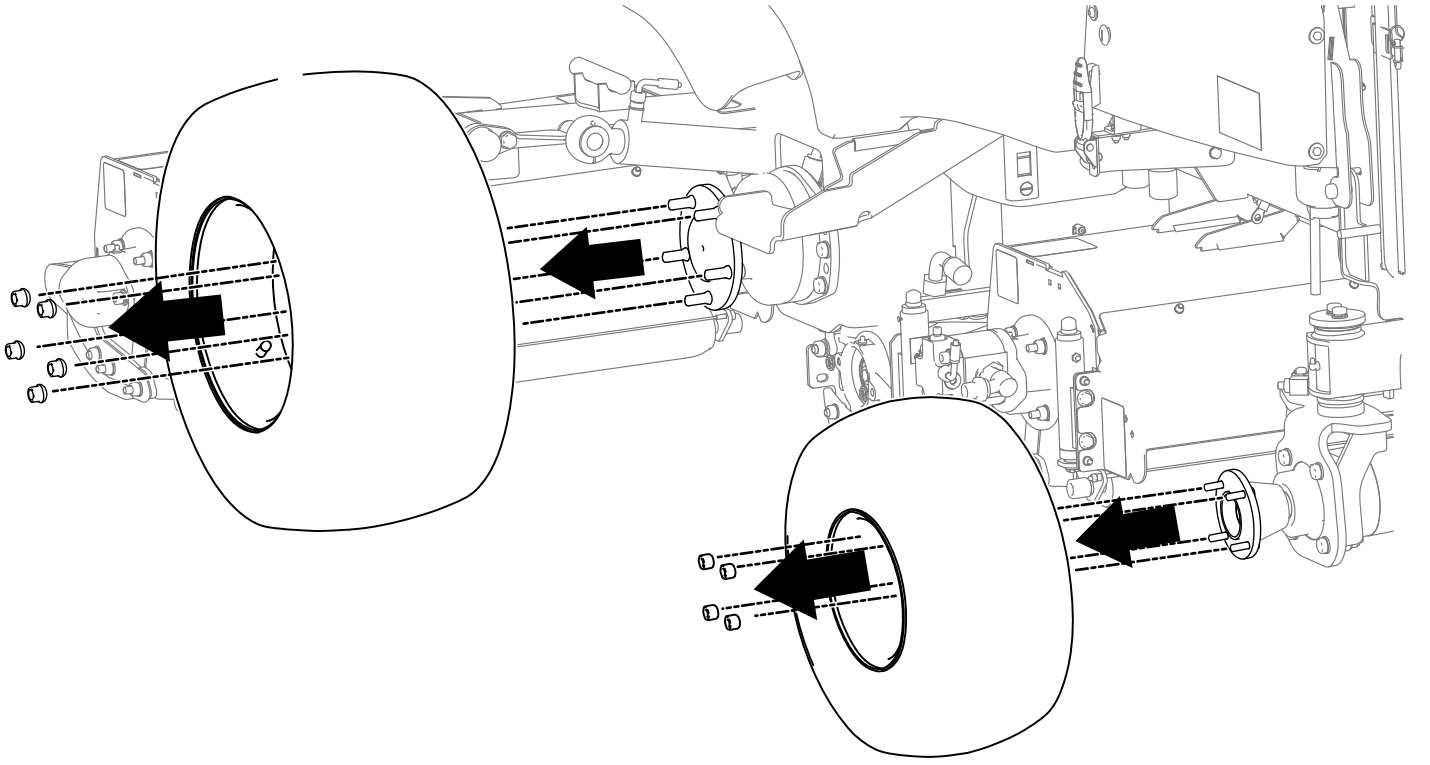

g197207

Figure 1

© 2016—The Toro® Company
8111 Lyndale Avenue South
Bloomington, MN 55420

Register at www.Toro.com.

CE

Original Instructions (EN)
Printed in the USA
All Rights Reserved

3410-891 A

Installing the New Tires

1. Install the new tires onto the machine.
2. Secure the tires with the wheel nuts.
3. Lower the mower.
4. Tighten the nuts on the front tire assembly to 200 N·m (147.5 ft-lb).
5. Tighten the nuts on the rear tire assembly to 54 N·m (40 ft-lb).
6. Verify that the tire pressure matches the recommended pressure in the *Operator's Manual*.

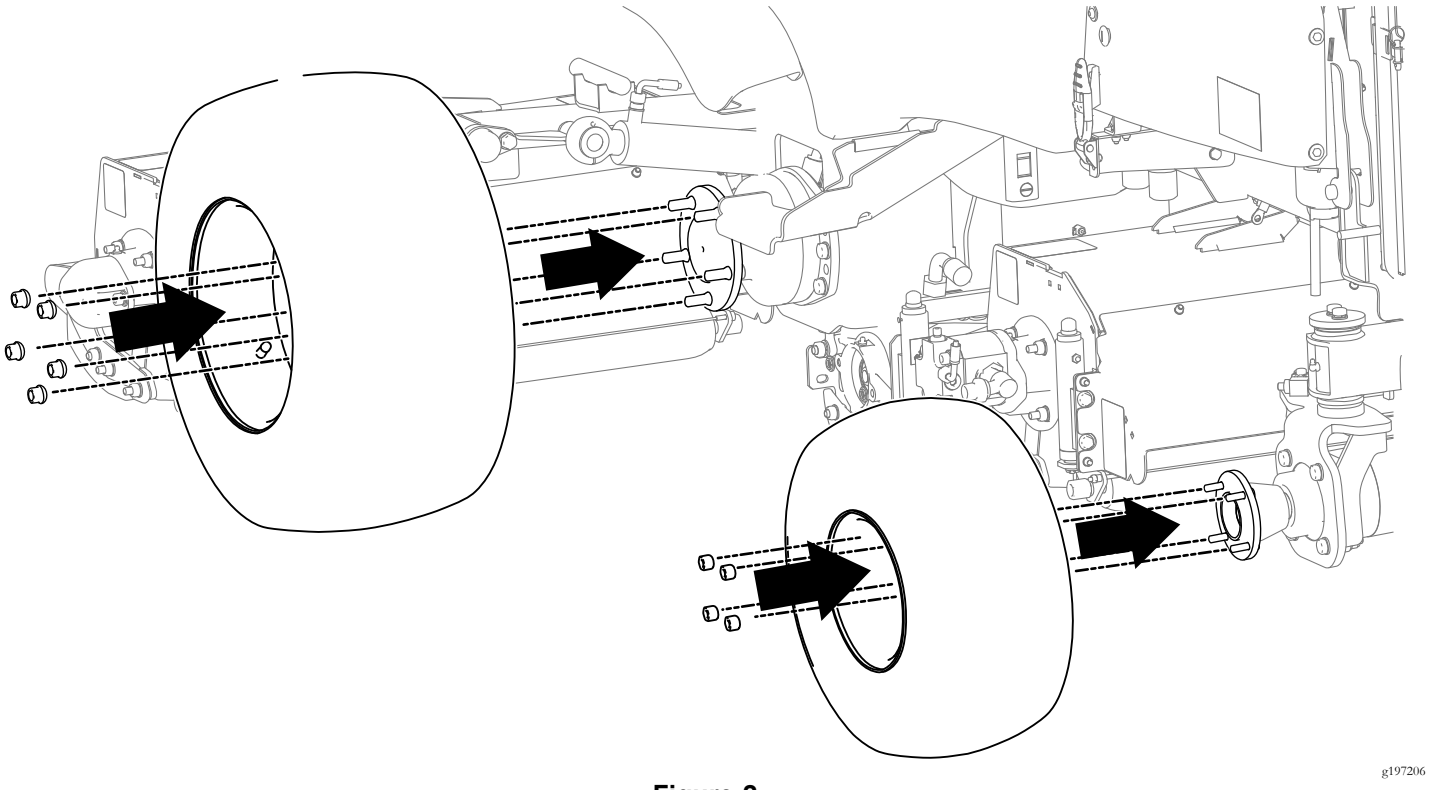


Figure 2