



**DEALER
PRE-DELIVERY
CHECK LIST**

WHEEL HORSE® Mowers

PROPER MOWER LEVEL ADJUSTMENT IS CRITICAL FOR GOOD QUALITY OF CUT. LEVEL ADJUSTMENT MUST BE MADE ON MOWER WHEN INSTALLED ON TRACTOR. ENCLOSED OPERATOR'S MANUAL MUST BE ON HAND FOR REFERENCE TO PERFORM SOME DETAILED INSTALLATION PROCEDURES.


Adjust Tire Pressure

Using a low pressure tire gauge, adjust tire pressure in all four tires:

	Front	Rear
PSI	12	12
kg/cm85	.85

Level Mower

Mower must be adjusted for proper level side-to-side and pitched 1/8"-1/4" low in the front.

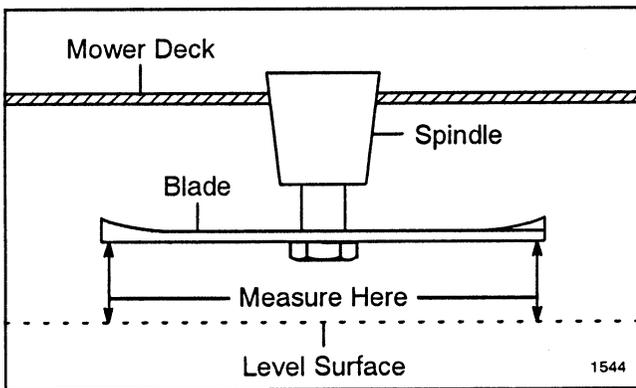

- 1 Set mower in middle cutting height position.
- 2 Turn mower blade(s) side-to-side. Adjust so the distance from level surface to outermost blade tips is the same on both sides.

- 3 Turn blade(s) front-to-rear. Adjust so the distance from front most blade tip to ground is 1/8"-1/4" lower than rear most blade tip.
- 4 Park rider on smooth level surface.

Check Spindle Lubrication

If applicable, fill spindles with #2 multi-purpose lithium grease applied with a pressure grease gun.

Attach Operator's Manual To Unit

Sign this form below and insert it in front of Operator's Manual. Attach Operator's Manual and Warranty Statement to unit.

I CERTIFY THAT THIS MOWER IS SERVICED AND PREPARED FOR CUSTOMER OPERATION.

Authorized TORO Dealer Signature

Note: Preceding items covering pre-delivery service and inspection should have been completed by a TORO Dealer. Failure to perform this work on your new mower prior to its first use may affect warranty.