



# Lift Cylinder Lock Kit

## GrandStand® Multi Force Mower

Model No. 137-4106

### Installation Instructions

#### ▲ WARNING

#### CALIFORNIA Proposition 65 Warning

This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

## Installation

1. Park the machine on a level surface, disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
2. Raise the A-frame.
3. Shut off the engine and remove the key.
4. Install the cylinder lock over the cylinder rod using the pin and hairpin cotter (Figure 1).

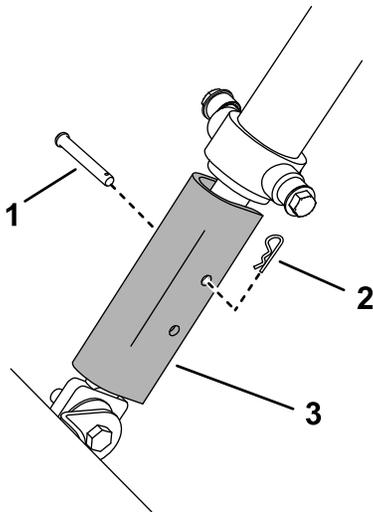


Figure 1

g215387

- |                   |                  |
|-------------------|------------------|
| 1. Pin            | 3. Cylinder lock |
| 2. Hairpin cotter |                  |

