



## GTS 200 UPDATE KIT

PART NO. 100-2517

### INSTALLATION INSTRUCTIONS

## Loose Parts

**Note:** Use the chart below to identify parts used for assembly.

DESCRIPTION	QTY.
Engine Guard	1
Bolt	4

## Before Installing

### WARNING

#### POTENTIAL HAZARD

- If you leave the wire on the spark plug, someone could accidentally start the engine.

#### WHAT CAN HAPPEN

- Accidental starting of engine could seriously injure you or other bystanders.

#### HOW TO AVOID THE HAZARD

- Pull wire off spark plug before you install kit. Also push wire aside so it does not accidentally contact spark plug.

1. Disconnect spark plug wire from spark plug.

## Installation

1. Remove the four bolts securing the primer guard and wear plates to the mower housing (Fig. 1). Discard the four bolts.

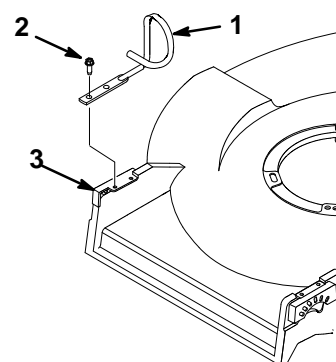


Figure 1

- |                 |               |
|-----------------|---------------|
| 1. Primer guard | 3. Wear plate |
| 2. Bolt (4)     |               |

2. Secure the engine guard, primer guard and wear plates as shown in Figure 2 with the four new bolts supplied in this kit.

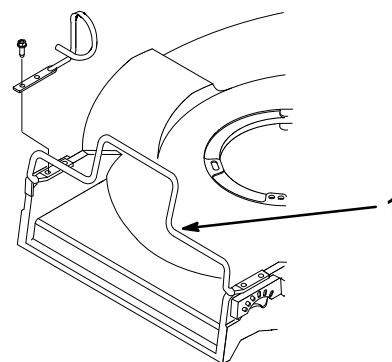


Figure 2

1. Engine guard