



Form No. 3430-624 Rev B

X25 GeoLink® Precision Spray System Finishing Kit

Serial Number 315000001 and After Multi Pro® 1750 Turf Sprayer

Model No. 41631—Serial No. 403400001 and Up

Installation Instructions

Introduction


The GeoLink™ spray system kit is an attachment for a turf spray application vehicle and is intended to be used by professional, hired operators in commercial applications. It is designed primarily for spraying on well-maintained lawns in parks, golf courses, sports fields, and on commercial grounds. Using this product for purposes other than its intended use could prove dangerous to you and bystanders.

Read this information carefully to learn how to operate and maintain your product properly and to avoid injury and product damage. You are responsible for operating the product properly and safely.

Visit www.Toro.com for product safety and operation training materials, accessory information, help finding a dealer, or to register your product.

Whenever you need service, genuine Toro parts, or additional information, contact an Authorized Service Dealer or Toro Customer Service and have the model and serial numbers of your product ready. [Figure 1](#) identifies the location of the model and serial numbers on the product. Write the numbers in the space provided.

Important: With your mobile device, you can scan the QR code (if equipped) on the serial number plate to access warranty, parts, and other product information.

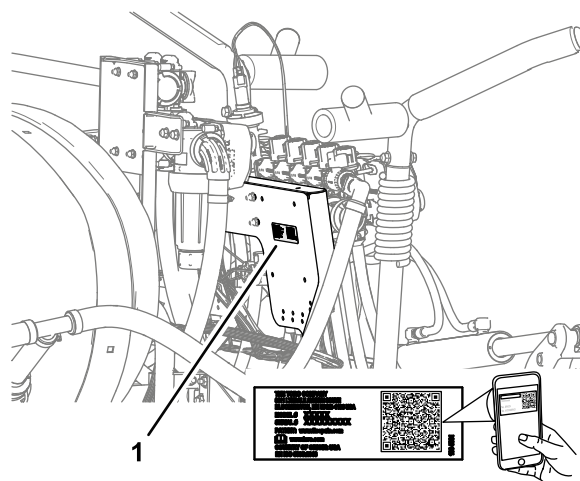

g281138

Figure 1

1. Model and serial number location

Model No. _____
Serial No. _____

This manual identifies potential hazards and has safety messages identified by the safety-alert symbol ([Figure 2](#)), which signals a hazard that may cause serious injury or death if you do not follow the recommended precautions.



g000502

Figure 2

1. Safety-alert symbol

This manual uses 2 words to highlight information. **Important** calls attention to special mechanical information and **Note** emphasizes general information worthy of special attention.



Contents

Introduction	1	32 Installing Components for the Sprayer Electrical System	77
Safety	3	33 Connecting the Kit Wire Harness at the Seat Base	83
Safety and Instructional Decals	3	34 Installing the Wire Harnesses for the Navigation Components.....	85
Setup	5	35 Installing the Hood and the Left and Right Front Fenders	94
1 Preparing to Install the Kit	9	36 Installing the Engine-Access Panel and the Seat	96
2 Removing the Seat and the Engine-Access Panel.....	10	37 Programming the Machine Settings	98
3 Removing the Left and Right Front Fenders and the Hood	11	38 Powering the GeoLink Components	100
4 Disconnecting the Optional Foam-Marker Kit.....	13	39 Verifying the Software Version	101
5 Disconnecting the Optional Ultra Sonic Boom Leveling Kit	18	40 Selecting the Units of Measure	101
6 Removing the Center-Section Cover (11-nozzle) of the Optional Covered-Boom Kit.....	19	41 Creating a Field	101
7 Disconnecting the Pressure-Sense Tube for the Dash Gauge.....	19	42 Creating a New Application Rate Product	102
8 Disconnecting the Sprayer Valve Connectors	20	43 Balancing the Nozzle Valves	102
9 Removing the Rate-Control Switch	21	44 Creating a Spray Job	102
10 Removing the Spray Sections	21	45 Checking the Spray System	103
11 Installing the Center-Boom Extension.....	26	46 Balancing the Agitation Bypass Valve.....	104
12 Installing the Mount Brackets and Sprayer Nozzles to the Center-Spray Section.....	29	47 Performing a Flow Meter Calibration.....	105
13 Removing the Boom-Section Valves	32	48 Verifying the Cellular Status	106
14 Installing the Flow Meter Support Clamps.....	35	49 Performing a Compass Calibration.....	106
15 Assembling the Wire Harness to the Machine	37	50 Clearing NVRAM	106
16 Assembling the Flow-Meter Manifold	43	51 Performing a Compass Calibration.....	108
17 Installing the Bypass Hoses to the Tank	44		
18 Installing the Modified Center-Spray Section.....	45		
19 Assembling the Lift Cylinder Manifold to the Cylinder Mount.....	45		
20 Installing the Valve Mount and Sprayer Valves	46		
21 Assembling the Boom-Lift Cylinders.....	53		
22 Installing the Outer-Spray Sections	55		
23 Installing the Sprayer-Nozzle Hoses	57		
24 Connecting the Kit Wire Harness at the Back of the Machine.....	62		
25 Connecting the Pressure-Sense Tube for the Dash Gauge.....	63		
26 Connecting the Optional Foam-Marker Kit.....	64		
27 Connecting the Optional Ultra Sonic Boom Kit	67		
28 Assembling the Optional Covered-Boom Kit.....	68		
29 Installing the Navigation Receiver	71		
30 Installing the Sprayer Monitor.....	74		
31 Wiring the Spray Pump Clutch.....	76		

Safety

⚠ WARNING

Chemical substances used in the spray system may be hazardous and toxic to you, bystanders, animals, plants, soil, or other property.

- Carefully read and follow the chemical warning labels and safety data sheet (SDS) for all chemicals used and protect yourself according to the chemical manufacturer's recommendations. For example, use appropriate personal protective equipment (PPE), including face and eye protection, gloves, or other equipment to guard against personal contact with a chemical.
- There may be more than 1 chemical used and information on each chemical; assess each chemical.
- Refuse to operate or work on the sprayer if this information is not available.
- Before working on a spray system, ensure that the system has been triple rinsed and neutralized according to the recommendations of the chemical manufacturer(s) and that all the valves are cycled 3 times.
- Verify that there is an adequate supply of clean water and soap nearby, and immediately wash off any chemicals that contact you.


Shut off the machine, remove the key (if equipped), and wait for all movement to stop before you leave the operator's position. Allow the machine to cool before adjusting, servicing, cleaning, or storing it.

Improperly using or maintaining this machine can result in injury. To reduce the potential for injury, comply with these safety instructions and always pay attention to the safety-alert symbol ⚠, which means Caution, Warning, or Danger—personal safety instruction. Failure to comply with these instructions may result in personal injury or death.

Safety and Instructional Decals




Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or missing.

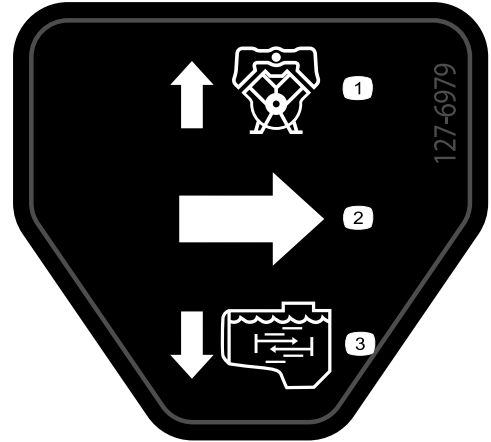

127-6979

decal127-6979


1. Bypass-return flow
2. Flow
3. Agitation flow

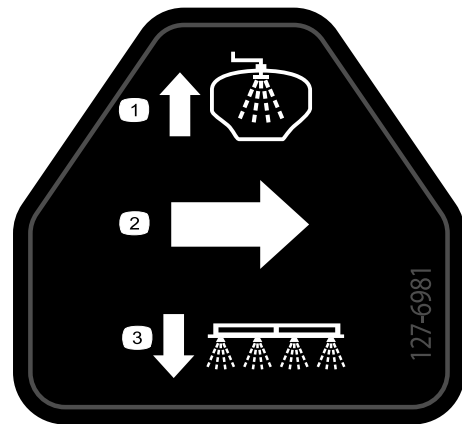

127-6981

decal127-6981

1. Bypass-return flow
2. Flow
3. Boom spray

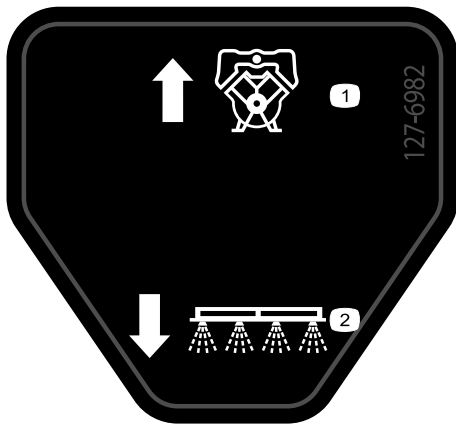

decal127-6982

127-6982

1. Bypass-return flow 2. Boom spray



decal127-6976

127-6976

1. Decrease 2. Increase

Installation

Loose Parts

Use the chart below to verify that all parts have been shipped.

Procedure	Description	Qty.	Use
1	No parts required	–	Prepare to install the kit.
2	No parts required	–	Remove the seat and the engine access panel.
3	No parts required	–	Remove the left and right front fenders and the hood.
4	Tube assembly—Toro Part No. 114-9553 Cable tie	2 8	Disconnect the optional foam-marker kit.
5	No parts required	–	Disconnecting the optional ultra sonic boom leveling kit.
6	No parts required	–	Remove the center-section cover (11-nozzle) of the optional covered-boom kit.
7	No parts required	–	Disconnecting the pressure-sense tube for the dash gauge.
8	No parts required	–	Disconnect the sprayer valve connectors.
9	Cable tie Switch plug	1 1	Remove the rate-control switch.
10	No parts required	–	Remove the spray sections.
11	Flange-head bolt (3/8 x 1 inch) Flange locknuts (3/8 inch) Center-boom extension Cylinder mount (wide) Tie plate (wide) Carriage bolt (1/2 x 1-1/4 inches) Flange locknut (1/2 inch)	2 2 1 1 1 4 4	Install the center boom extension.
12	Sprayer nozzle Hose assembly (sprayer valve 5 or 6) Flange locknut (5/16 inch)	2 2 2	Install the mount brackets and sprayer nozzles to the center-spray section.
13	Cap (quick coupler) Retainer	3 3	Remove the boom-section valves.
14	Flow meter mount Support-clamp half Bolt (1/4 x 4-1/2 inches) Flange locknuts (1/4 inch)	1 4 4 4	Installing the flow meter support clamps.
15	Rear wire harness Cable tie	1 7	Assemble the rear wire harness to the machine.

Procedure	Description	Qty.	Use
16	Straight hose barb (1 x 2 inches)	1	Assemble the manifold to the flow meter.
	Hose clamp (3/4 to 1-1/2 inches)	3	
	Hose (1 x 5-3/4 inches)	1	
	Manifold	1	
	Hose (1 x 16 inches)	1	
17	Bypass hose assembly	1	Install the bypass hoses to the tank.
	Shutoff valve	1	
18	No parts required	–	Install the modified center-spray section.
19	No parts required	–	Assembling the lift cylinder manifold to the cylinder mount.
20	Valve mount and sprayer-valve assembly	1	Install the valve mount and valves.
	Bolt (4 x 10 mm)	3	
	ASC 10 sprayer controller	1	
	Flange locknut (4 mm)	3	
	Cap (quick-disconnect fitting)	2	
	Flange-head bolts (5/16 x 3/4 inch)	8	
	Flange locknuts (5/16 inch)	8	
	Hose clamp	1	
	Push-in fastener (cable tie)	1	
	Push-in fastener (connector anchor)	3	
21	Hydraulic hose (1/4 x 24-3/4 inches)	4	Assemble the boom-lift cylinders.
22	Nylon-flange bushing	4	Install the outer-spray sections.
	Cable tie	1	
	Supply-hose assembly 188 cm (74 inches)	1	
	Supply-hose assembly 234 cm (92 inches)	1	
23	Supply-hose assembly 279 cm (110 inches)	1	Install the sprayer nozzle hoses.
	Supply-hose 279 cm (110 inches)	2	
	Supply-hose 234 cm (92 inches)	2	
	Supply-hose 188 cm (74 inches)	4	
24	Supply-hose 81 cm (32 inches)	2	Connect the rear wire harness.
	No parts required	–	
25	No parts required	–	Connect the pressure-sense tube for the dash gauge.
26	Cable tie	6	Connect the optional foam-marker kit.
27	No parts required	–	Connect the ultra sonic boom kit.

Procedure	Description	Qty.	Use
28	Cover extension assembly (12-nozzle—Toro 120-0621) Pop rivet (Toro Part No. 114439) Support bracket (center-section cover—Toro Part No. 131-3703-03) Clip nut (Toro Part No. 94-2413) Flange-head bolts (3/8 x 1-1/4 inches—Toro Part No. 110-5050) Flange locknuts (3/8 inch—Toro Part No. 104-8301) Cover strap (Toro Part No. 120-0629) Flange-head bolts (5/16 x 1-1/4 inches—Toro Part No. 323-36)	1 22 4 4 16 16 2 4	Assemble the optional covered-boom kit.
29	Receiver plate Spacer (3/8 x 1 inch) Receiver mount Bolt (3/8 x 3-1/4 inches) Lock washer (3/8 inch) Washer (3/8 x 13/16 inch) Flange locknut (3/8 inch) Flange-head bolt (5/16 x 3/4 inch) Flange locknut (5/16 inch) Flange-head bolt (3/8 x 1-1/2 inches) Spacer (3/8 x 7/16 inch) Navigation receiver—X25 GeoLink Precision Spray System Kit, Base, WAAS (Model 41630) Hex-head bolt (5 x 16 mm) Washer (5 mm) Bulkhead adapter (optional CDMA RTK correction modem kit or GSM RTK correction modem kit) Cellular antenna (optional CDMA RTK correction modem kit or GSM RTK correction modem kit) Coaxial cable (optional CDMA RTK correction modem kit or GSM RTK correction modem kit)	1 1 1 1 1 1 1 1 1 2 2 1 3 3 1 1 1	Install the navigation receiver.
30	Monitor mount Flange-head bolt (6 x 12 mm) U-bolt (5/16 inch) Flange locknut (5/16 inch) Ball mount Flange-head bolt (5/16 x 3/4 inch) Monitor—X25 GeoLink Precision Spray System Kit, Base, WAAS (Model 41630) Monitor Arm—X25 GeoLink Precision Spray System Kit, Base, WAAS (Model 41630)	1 3 2 8 1 4 1 1	Install the sprayer monitor.
31	No parts required	—	Wire the spray pump clutch.

Procedure	Description	Qty.	Use
32	Battery bracket	1	Install the sprayer electrical system.
	Bolt (5/16 x 1-3/4 inches)	1	
	Washer (5/16 inch)	1	
	Battery (540 A)	1	
	Battery retainer	1	
	Flange locknut (5/16 inch)	1	
	Alternator bracket	1	
	Drive pulley 279 mm (11 inch)	1	
	Bolt (1/4 x 2-1/4 inches)	4	
	Lock washer (1/4 inch)	4	
	Alternator (60 A)	1	
	Flange-head bolt (8 x 25 mm)	1	
	Flange-head bolt (3/8 x 1-1/2 inches)	1	
	V-belt	1	
33	Relay	1	Connect the kit wire harness at the seat base.
	Push-in fastener	1	
	Fuse (15 A)	1	
	Fuse (50 A)	1	
34	Data Harness (navigation system)—GeoLink precision-spray-system kit (Model 41630)	1	Install the wire harnesses for the navigation components.
	Battery Harness (navigation system)—GeoLink precision-spray-system kit (Model 41630)	1	
	Cable tie	8	
	Quick-connect clamp (red handle)	1	
	Quick-connect clamp (black handle)	1	
35	Push-in fastener	13	Install the hood and the left and right front fenders.
36	No parts required	—	Install the engine-access panel and the seat.
37	No parts required	—	Program the machine settings.
38	No parts required	—	Power the GeoLink components.
39	No parts required	—	Verify the software version.
40	No parts required	—	Select the units of measure.
41	No parts required	—	Create a field.
42	No parts required	—	Create a new product.
43	No parts required	—	Balance the nozzle valves—Multi Pro 1750.
44	No parts required	—	Create a generic spray job.

Procedure	Description	Qty.	Use
45	No parts required	–	Check the spray system.
46	No parts required	–	Balance the agitation bypass valve.
47	No parts required	–	Perform a flow meter calibration.
48	No parts required	–	Verify the cellular status.
49	No parts required	–	Perform a compass calibration.
50	No parts required	–	Easing the nonvolatile RAM.
51	No parts required	–	Perform a compass calibration.

1

Preparing to Install the Kit

No Parts Required

Preparing the Sprayer Tank and Optional Rinse Tank

1. Clean the sprayer; refer to Cleaning the Sprayer in the *Operator's Manual* for the machine.

Important: Completely empty the sprayer tank before installing the GeoLink Spray System Finishing Kit.

2. For machines with the optional tank-rinse kit, perform the following:

A. Pump the water from the rinse tank into the sprayer tank; refer to Operating the Rinse Kit in the *Installation Instructions* for the Tank-Rinse Kit.

B. Drain the water from the sprayer tank; refer to Cleaning the Sprayer in the *Operator's Manual* for the machine.

3. Extend the left- and right-spray sections to the horizontal position.
4. Park the machine on a level surface, engage the parking brake, shut off the engine, and remove the key; refer to the *Operator's Manual*.

Important: Park the machine on a level surface before installing the GeoLink kit.

Disconnecting the Battery

1. Unlatch the seat by pushing the seat-latch handle rearward (Figure 3).

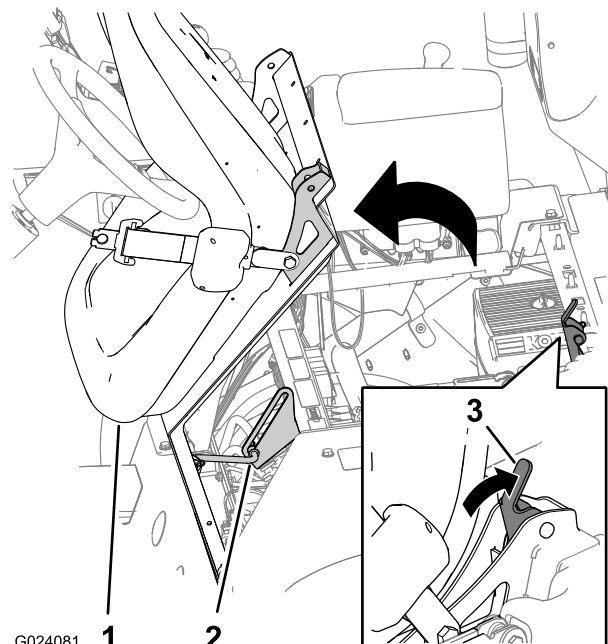


Figure 3

1. Seat
2. Prop rod
3. Seat-latch handle

2. Rotate the seat and seat plate forward until the end of the prop rod, at the prop-rod bracket, is at the bottom of the slot in the bracket (Figure 3).
3. Allow the engine to cool completely.
4. Remove the bolt and nut that secures the terminal of the negative-battery cable to the negative post of the battery.

⚠ WARNING

Incorrect battery cable routing could damage the machine and cables causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.


- Always *disconnect* the negative (black) battery cable before disconnecting the positive (red) cable.
- Always *connect* the positive (red) battery cable before connecting the negative (black) cable.

⚠ WARNING

Battery terminals or metal tools could short against metal components causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.

- When removing or installing the battery, do not allow the battery terminals to touch any metal parts of the machine.
 - Do not allow metal tools to short between the battery terminals and metal parts of the machine.
5. Slide back the insulator cover and remove the bolt and nut that secures the terminal of the positive-battery cable to the positive post of the battery. (Figure 4).

Note: Ensure that the terminals of the battery cables do not touch the battery posts.

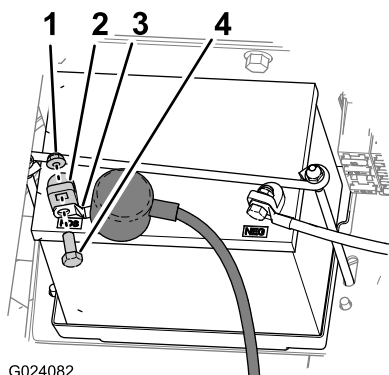

G024082

g024082

Figure 4

- | | |
|-----------------|--------------------------------------|
| 1. Nut | 3. Terminal (positive-battery cable) |
| 2. Battery post | 4. Bolt |


2

Removing the Seat and the Engine-Access Panel

No Parts Required

Removing the Seat

1. Remove the 2-socket connector of the machine wire harness that connects to the seat-switch connector (Figure 5).

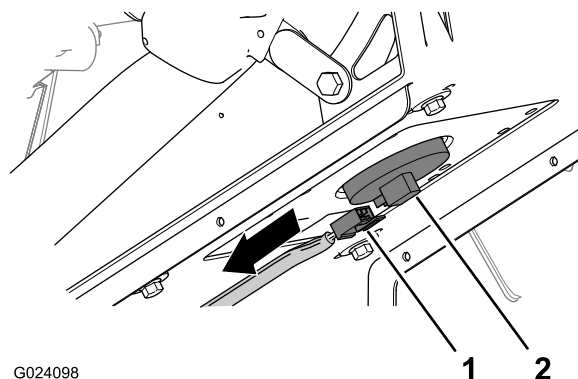


G024098

g024098

Figure 5

- | | |
|--|--------------------------|
| 1. 2-socket connector (machine wire harness) | 2. Seat-switch connector |
|--|--------------------------|

2. Remove the hairpin that secures the prop rod to the bracket at the bottom of the seat plate (Figure 6).

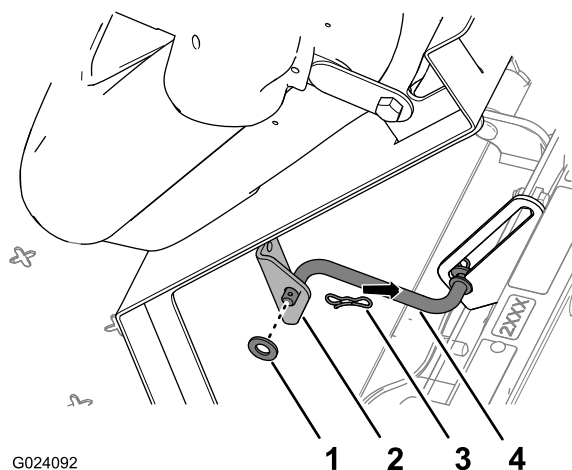

G024092

g024092

Figure 6

- | | |
|-------------------|-------------|
| 1. Washer | 3. Hairpin |
| 2. Bracket (seat) | 4. Prop rod |

- Remove the 2 hairpins that secure the pivot fitting of the seat plate to the chassis brackets ([Figure 7](#)).

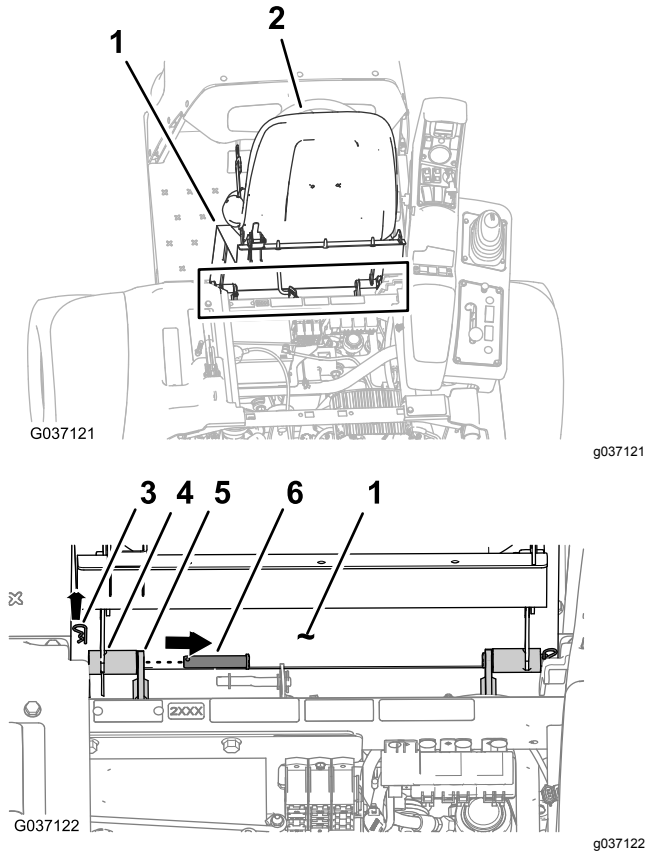


Figure 7

- | | |
|---------------|-----------------------------|
| 1. Seat plate | 4. Pivot fitting (seat pan) |
| 2. Seat | 5. Chassis bracket |
| 3. Hairpin | 6. Pivot pin |

- Remove the 2 pivot pins that secure the seat and seat plate to the chassis ([Figure 7](#)).
- Lift the seat and seat plate up and out of the machine ([Figure 8](#)).

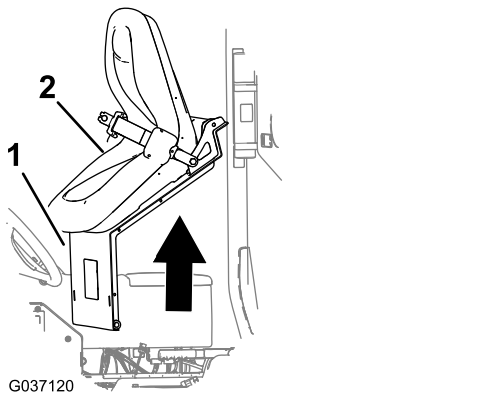


Figure 8

- | | |
|---------------|---------|
| 1. Seat plate | 2. Seat |
|---------------|---------|

Removing the Engine-Access Panel

- Rotate up the handles for the latches of the engine-access panel ([Figure 9](#)).

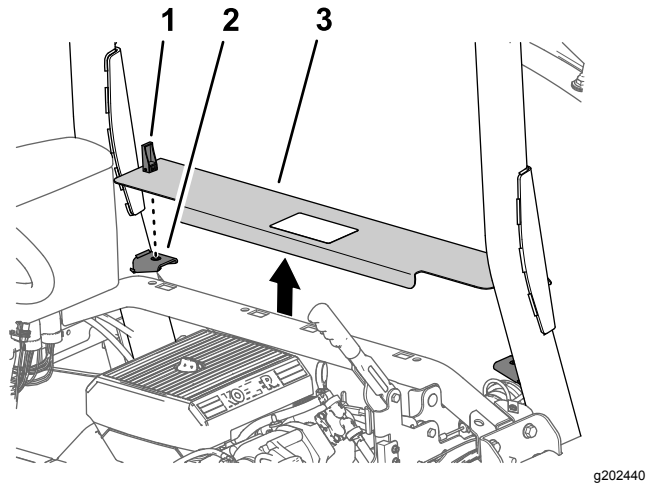


Figure 9

- | | |
|--------------------------|------------------------|
| 1. Latch | 3. Engine access panel |
| 2. Panel-support bracket | |

- Lift the engine-access panel and remove it from the machine ([Figure 9](#)).

3

Removing the Left and Right Front Fenders and the Hood

No Parts Required

Removing the Left and Right Front Fenders

- Remove the 2 push-in fastener that secure the left, front fender to the lower ROPS channel ([Figure 10](#)).

Note: Discard push-in fasteners that you removed.


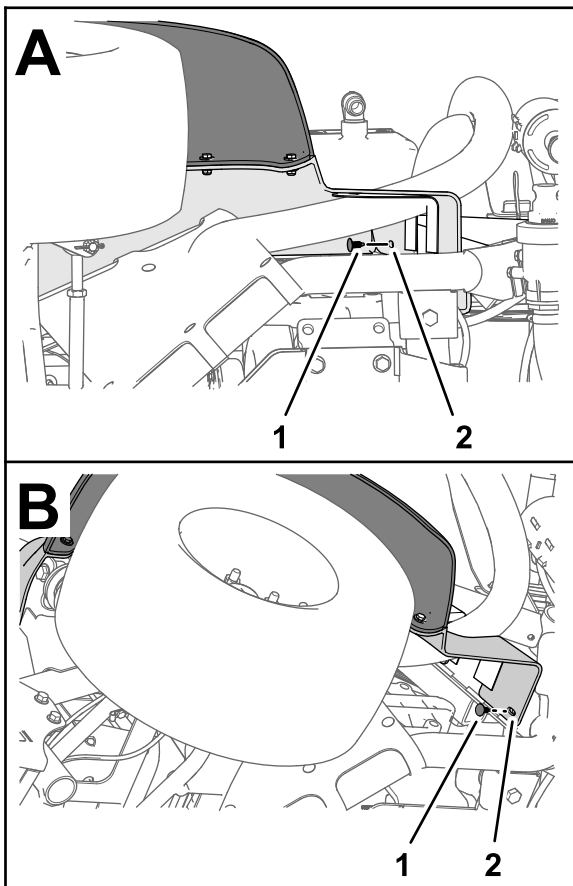


Figure 10

g264614

1. Push-in fastener
 2. Left, front fender
-
2. Remove the 3 bolts (5/16 x 1 inch) and 3 washers (5/16 inch) that secure the fender to the frame of the machine ([Figure 11](#)).

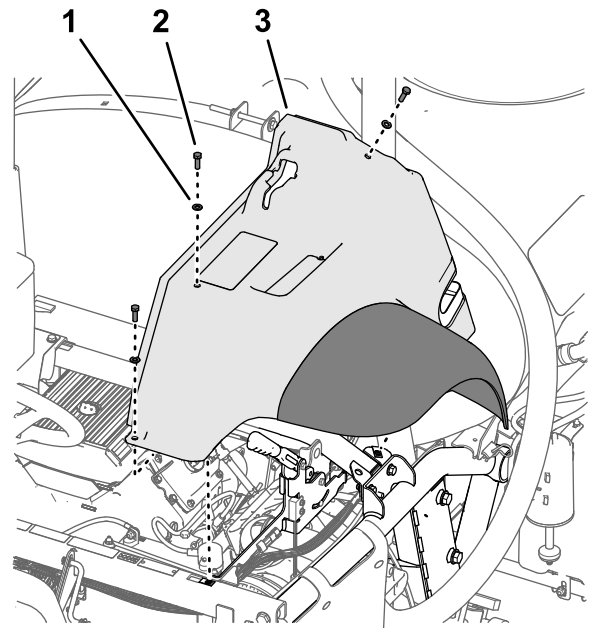

g197152


Figure 11

1. Washer (5/16 inch)
 2. Bolt (5/16 x 1 inch)
 3. Left, front fender
-

3. Remove the fender from the machine.

Note: Discard push-in fasteners that you removed.; retain the fender, bolts, and washers for installation in [Installing the Left and Right Front Fenders](#) (page 95).

4. Remove the 6 push-in fasteners and 5 washer (9/16 x 1/2 inch) that secure the inner-fender shroud to the frame of the machine ([Figure 12](#)).

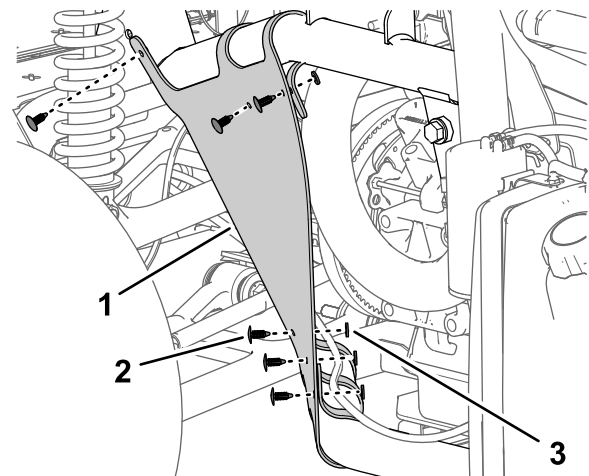

g197150

Figure 12

1. Inner-fender shroud
 2. Push-in fastener
 3. Washer (9/16 x 1/2 inch)
-

5. Remove the inner-fender shroud from the machine ([Figure 13](#)).

Note: Discard push-in fasteners that you removed.

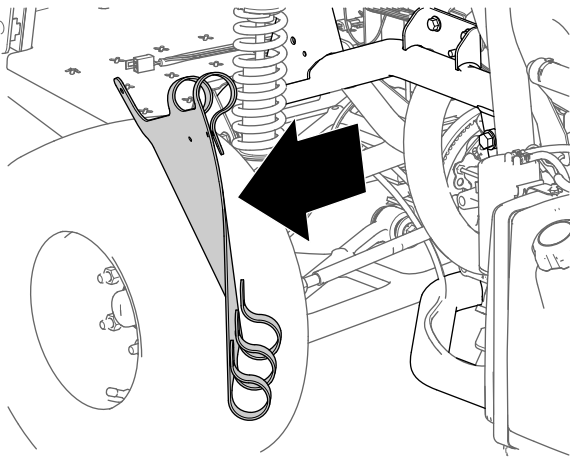


Figure 13

g197149

6. Repeat steps 1 through 5 for the fender and inner-fender shroud at the other side of the machine.

Removing the Hood

1. Disconnect the 2 electrical connectors (2-socket) of the machine wire harness from the 2-pin connectors of the left and right headlights (Figure 14).

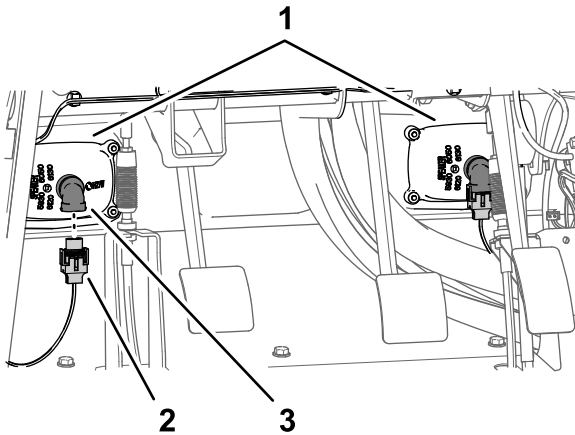


Figure 14

g197153

1. Headlights
2. 2-socket connector (machine wire harness)
3. 2-pin connector (headlight)

2. Remove the 9 push-in fasteners that secure the hood to the dash and frame of the machine (Figure 15).

Note: Retain the push-in fasteners for installation in [Installing the Hood \(page 94\)](#).

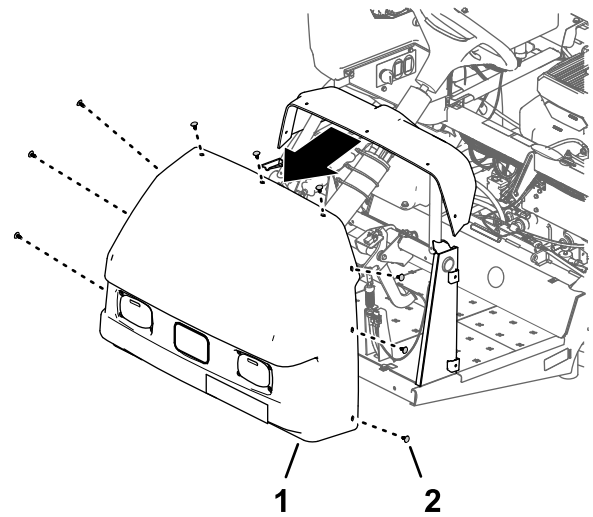


Figure 15

g197148

1. Hood
2. Push-in fastener

3. Remove the hood from the machine (Figure 15).

Note: Discard push-in fasteners that you removed.

4

Disconnecting the Optional Foam-Marker Kit

Parts needed for this procedure:

2	Tube assembly—Toro Part No. 114-9553
8	Cable tie

Removing the Liquid and Air Tubes at the Compressor

Foam Marker Kits 2017 and After

1. At the connection panel of the compressor for the foam-marker kit, secure a cable tie around the clear and blue tubing for the right-spray section (Figure 16).

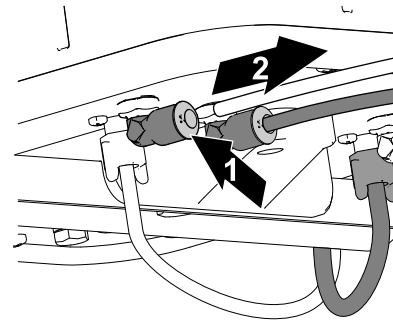
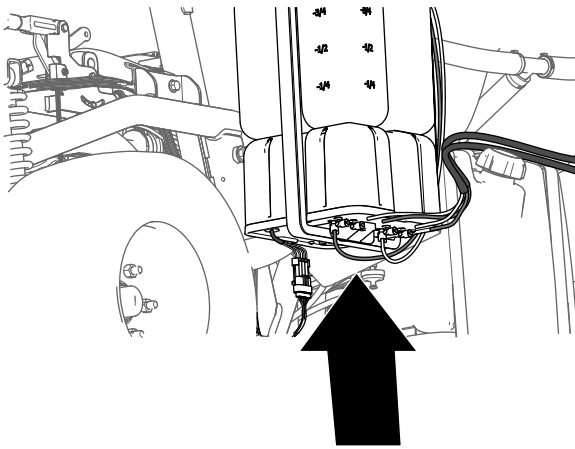


Figure 17

g197769

1. Push in the lock collar
2. Pull out the tube

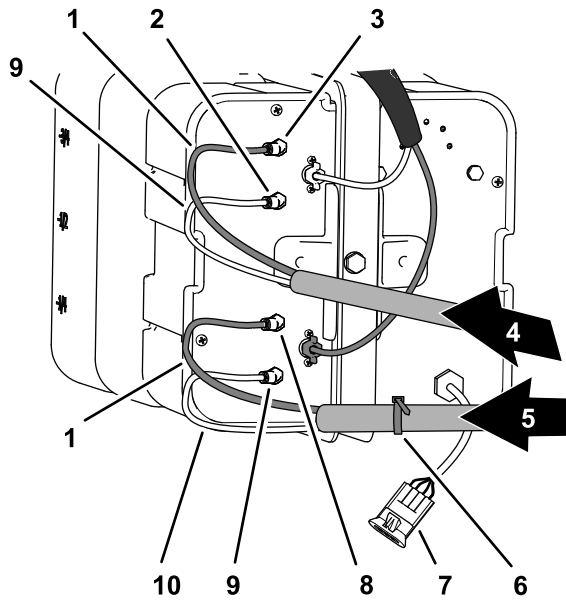


Figure 16

g197746

3. Pull out the tube from the fitting (Figure 17).
4. Repeat steps 2 and 3 for the other 3 tubes for the spray sections.

Removing the Liquid and Air Tubes at the Compressor


Foam Marker Kits 2016 and Before

1. At the connection panel of the compressor for the foam-marker kit, secure a cable tie around the clear and blue tubing for the right-spray section (Figure 18).


g266328

- | | |
|--|---|
| 1. Blue tube | 6. Cable tie |
| 2. Air fitting (left-spray section) | 7. Electrical connector |
| 3. Liquid fitting (left-spray section) | 8. Liquid fitting (right-spray section) |
| 4. Foam tubes (left-spray section) | 9. Clear tube |
| 5. Foam tubes (right-spray section) | 10. Air fitting (right-spray section) |

2. Press in the locking collar (Figure 17).

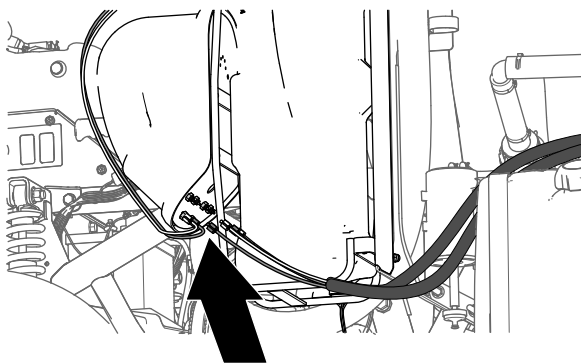

g197745

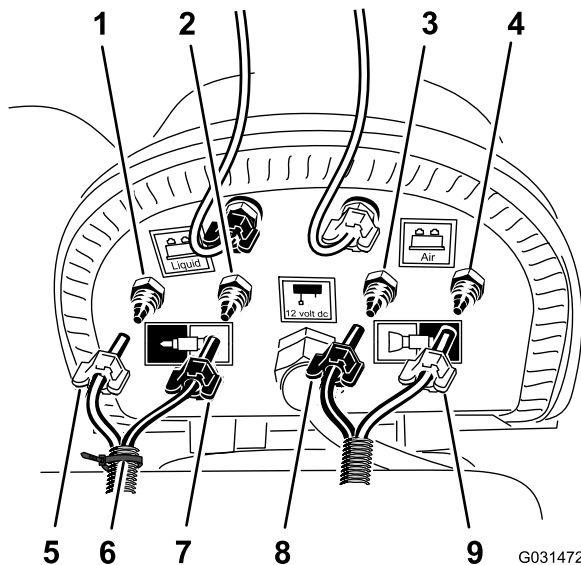

G031472

g031472


Figure 18

- | | |
|--|---|
| 1. Air compression fitting (right-spray section) | 6. Cable tie |
| 2. Liquid compression fitting (right-spray section) | 7. Compression nut—water (right-spray section—clear tube) |
| 3. Liquid compression fitting (left-spray section) | 8. Compression nut (left-spray section—blue tube) |
| 4. Air compression fitting (left-spray section) | 9. Compression nut (left-spray section—clear tube) |
| 5. Compression nut—air (right-spray section—blue tube) | |

- Loosen the compression nuts for the 2 clear and 2 blue tubes for the foam nozzles at the left- and right-spray section ([Figure 18](#)).
- Remove the 4 tubes from the compression fittings for the spray sections ([Figure 18](#)).

Removing the Liquid and Air Tubes to the Spray Sections

- At the outer-spray section, use a piece of tape to mark the left liquid and air tubes for the left spray section and the right liquid and air tubes for the right spray section.
- Move the tubes for the foam nozzles at the left- and right-spray section rearward and through the R-clamp near the pivot point for the spray section ([Figure 19](#)).

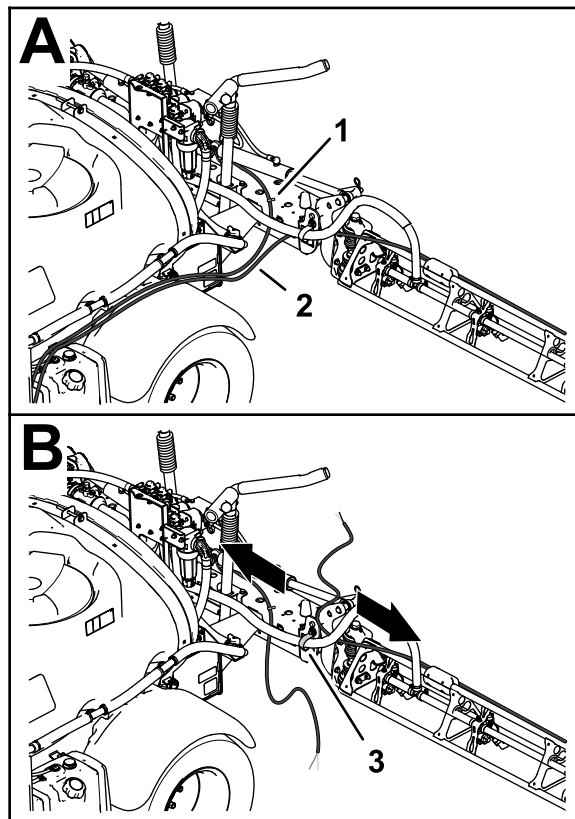

g197783

Figure 19

- | | |
|--|------------|
| 1. Tubing—foam-marker nozzle (left-spray section) | 3. R-clamp |
| 2. Tubing—foam-marker nozzle (right-spray section) | |

- If your machine has the **center boom-extension kit** installed, loosely secure the free end of the liquid and air tubes to the outer-spray section, and skip the procedures for [Preparing the New Tube Assemblies for the Foam-Marker Nozzles](#) (page 16) and [Installing the New Tube Assembly](#) (page 17).

Preparing the New Tube Assemblies for the Foam-Marker Nozzles

Machines without the Optional Center Boom-Extension Kit

1. Remove the cable ties that secure the liquid and air tubes of the foam marker kit to the outer-spray section ([Figure 20](#)).

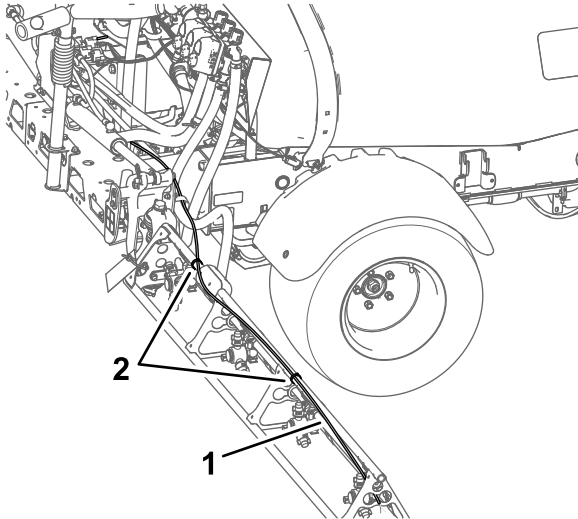


Figure 20

1. Liquid and air tubes (right-spray section shown)
2. Cable ties

2. At the foam-marker nozzle, loosen the compression nut that secures the blue tube (water) to the blue compression fitting of the foam-marker nozzle ([Figure 21](#)).

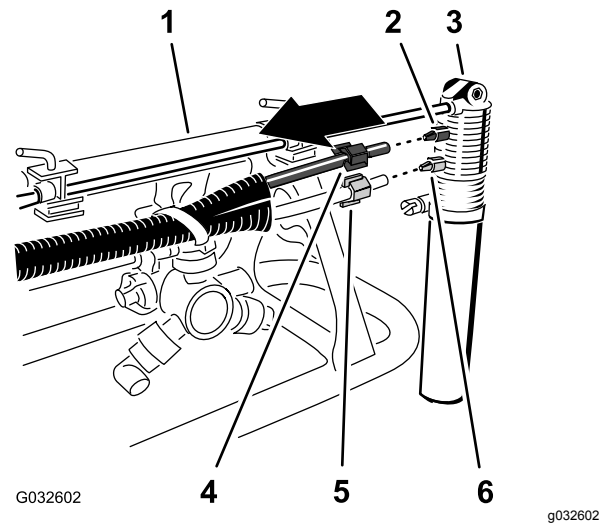


Figure 21

1. Outer-spray section
2. Compression fitting (blue)
3. Foam-marker nozzle
4. Compression nut (blue—blue water tube)
5. Compression nut (white—clear air tube)
6. Compression fitting (white)

3. Loosen the compression nut that secures the clear tube (air) to the white compression fitting of the foam-marker nozzle of the foam-marker nozzle ([Figure 21](#)).
4. Remove the liquid and air tubes from the machine.
5. Remove the compression nuts at the ends of the tubes ([Figure 21](#)).

Note: Retain the compression nuts for installation in step 1 of [Installing the New Tube Assembly](#) (page 17).

6. Align the old liquid and air tubes ([Figure 22](#)) to the new tube assembly (Toro Part No. 114-9553).

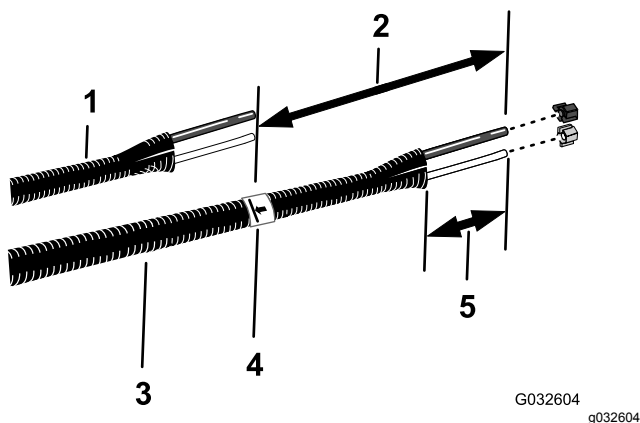


Figure 22

- | | |
|---|---------------------------------|
| 1. Old liquid and air tubes | 4. Tape and mark |
| 2. 26 cm (10 inches) | 5. 77 to 102 mm (3 to 4 inches) |
| 3. New tube assembly (Toro Part No. 114-9553) | |

7. Use a piece of tape to mark the length of the old liquid and air tubes onto the new tube assembly.
8. At the new tube assembly, add 26 cm (10 inches) length from the mark that you made in step 7, mark the tube assembly, and cut the tubes at the second (longer) mark (Figure 22).
9. If the old liquid and air tubes are marked with a cable tie, mark the new tube assembly with a cable tie; otherwise skip to step 10.

Note: You no longer need the old liquid and air tubes.

10. Remove 77 to 102 mm (3 to 4 inches) of the sheathing from around each end of the tube assembly (Figure 22).
11. Repeat steps 1 through 10 for the liquid and air tubes at the other side of the machine.

Installing the New Tube Assembly

Machines without the Optional Center Boom-Extension Kit

1. Slip the blue compression nut over the ends of blue tube and the white compression nut over the clear tube (Figure 23).

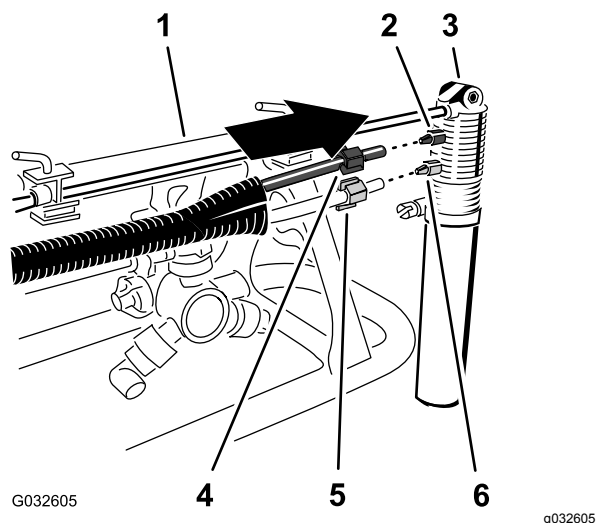


Figure 23

- | | |
|-------------------------------|---|
| 1. Outer-spray section | 4. Compression nut (blue—blue water tube) |
| 2. Compression fitting (blue) | 5. Compression nut (white—clear air tube) |
| 3. Foam-marker nozzle | 6. Compression fitting (white) |

2. Align the end of the clear tube with the white compression nut to the white fitting of the foam-marker nozzle, and tighten the compression nut by hand (Figure 23).
3. Align the end of the blue tube with the blue compression nut to the blue fitting of the foam-marker nozzle, and tighten the compression nut by hand (Figure 23).
4. Route the tube assembly along rear side of the upper support pole of the outer-spray section as shown in Figure 24.

Important: If the tube assembly is installed at the wrong side of the upper support pole, the tubes will be pinched between the cradle and the outer-spray section when the booms are in the transport position.


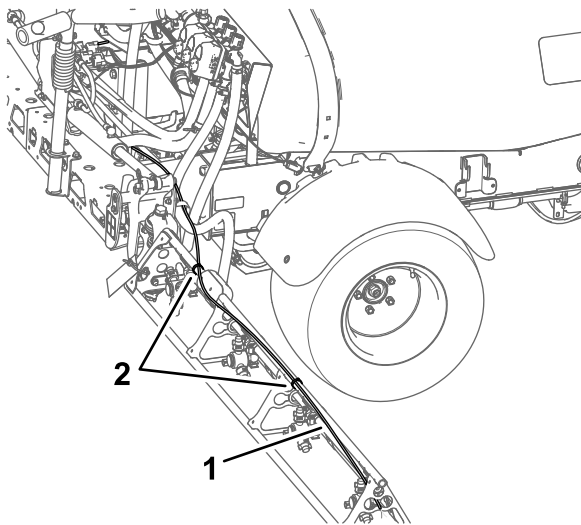


Figure 24

g197816

1. Tube assembly (right-spray section shown)
2. Cable ties

5. Secure the tube assembly to the hole in the nozzle support with a cable tie as shown in [Figure 25](#).

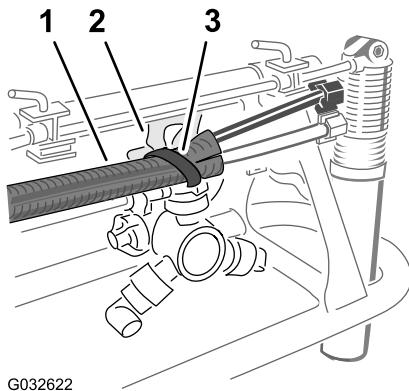

G032622

Figure 25

g032622

1. Tube assembly
2. Nozzle support
3. Cable tie

6. Secure the tube assembly to the outer-spray section with cable ties as shown in [Figure 24](#).
7. Loosely secure the free end of the tube assembly to the outer-spray section.
8. Repeat steps 1 through 6 for the tube assembly at the other side of the machine.


5

Disconnecting the Optional Ultra Sonic Boom Leveling Kit

No Parts Required

Procedure

1. Disconnect 3-pin connector of the wire harness for the ultra sonic boom leveling kit from the 3-socket connector of the machine wire harness ([Figure 26](#)).

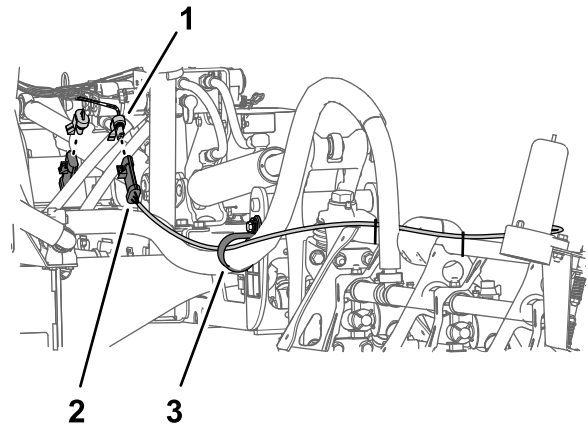

g198450

Figure 26

1. 3-socket connector (machine wire harness)
2. 3-pin connector (wire harness—ultra sonic boom leveling kit)
3. Support clamp

2. Repeat step 1 for the 3-pin connector of the ultra sonic boom wire harness at the other side of the machine.

6

Removing the Center-Section Cover (11-nozzle) of the Optional Covered-Boom Kit

No Parts Required

Procedure

1. While supporting the center-section cover (11-nozzle), remove the 4 flange-head bolts (5/16 x 1-1/4 inches) and 2 cover straps that secure the cover to the cover-support bracket (Figure 27).

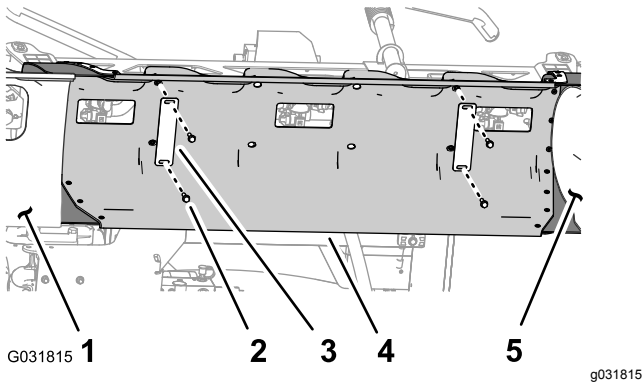


Figure 27

- | | |
|---|-------------------------------|
| 1. Boom-section cover (left) | 4. Center-section cover |
| 2. Flange-head bolt (5/16 x 1-1/4 inches) | 5. Boom-section cover (right) |
| 3. Cover strap | |

2. Remove the center-section cover from the machine (Figure 28).

Note: Retain the cover for assembly, cover straps, and flange-head bolts for installation in steps 1 and 2 of [Installing the Center-Section Cover](#) (page 71).

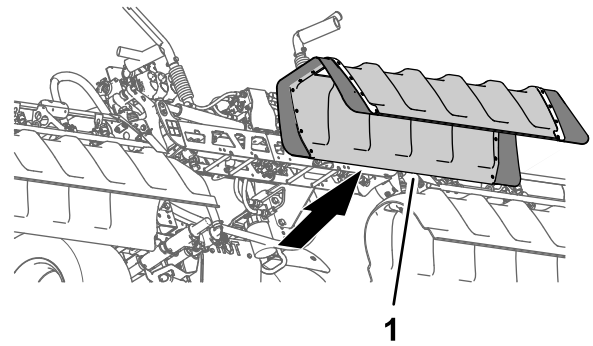


Figure 28

1. Center-section cover

7

Disconnecting the Pressure-Sense Tube for the Dash Gauge

No Parts Required

Disconnecting the Pressure-Sense Tube for the Dash Gauge

Machines without the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

Note: If your machine is equipped with an optional spray gun kit, refer to [Disconnecting Pressure-Sense Tube and Supply Hose](#) (page 20).

1. Press in the collar for the tube coupler in the end cap of the right boom-section valve (Figure 29).

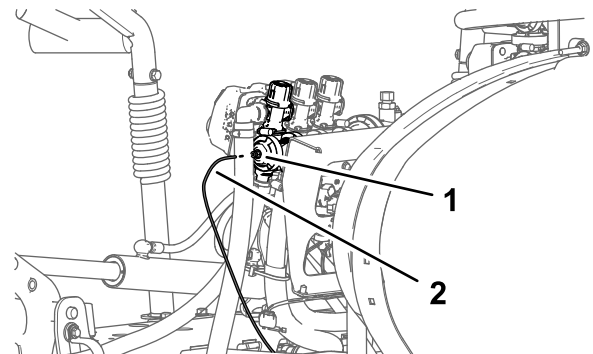


Figure 29

- | | |
|---|------------------------|
| 1. Tube coupler (end cap of the right boom-section valve) | 2. Pressure-sense tube |
|---|------------------------|

2. Pull the pressure-sense tube for the dash gauge out of the tube coupler (Figure 29).

Disconnecting Pressure-Sense Tube and Supply Hose

Machines with the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

1. Press in the collar for the tube coupler in the 90° elbow of the right spray-section valve (Figure 30).

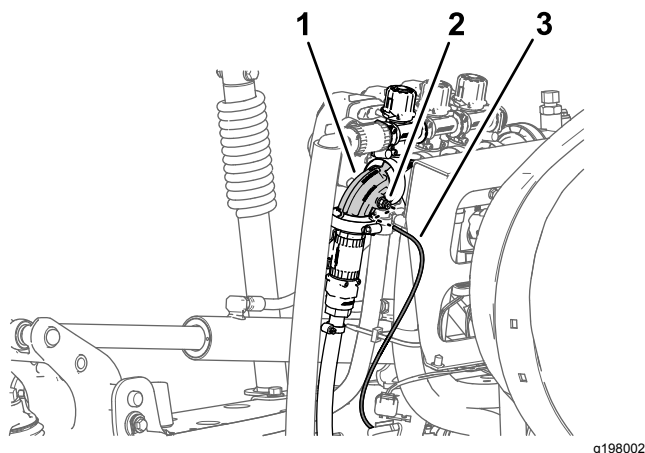


Figure 30

1. 90° elbow (right boom-section valve)
2. Tube coupler
3. Pressure-sense tube (dash-pressure gauge)

2. Pull the pressure-sense tube for the dash gauge out of the tube coupler (Figure 30).

Note: Do not remove the 90° elbow for the shutoff valve for the supply hose of the hose reel from the flange of the right boom-section valve.

8

Disconnecting the Sprayer Valve Connectors

No Parts Required

Procedure

1. Disconnect the 3-socket connector labeled LEFT SPRAY VALVE, CENTER SPRAY VALVE, and RIGHT SPRAY VALVE of the machine wire harness from the 3-pin connectors of the 3 spray-valve actuators (Figure 31).

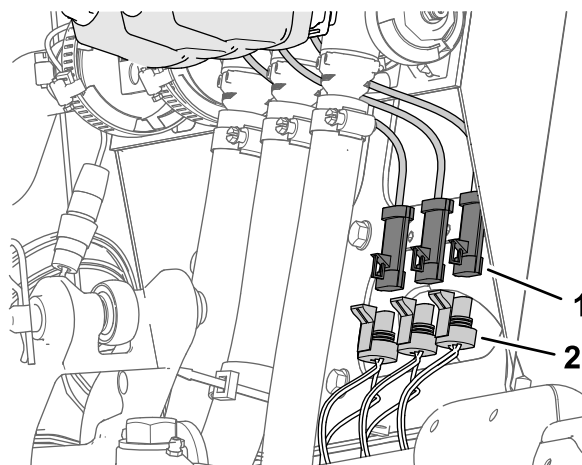


Figure 31

1. 3-pin connector (spray-valve actuator)
2. 3-socket connector—machine wire-harness (LEFT SPRAY VALVE, CENTER SPRAY VALVE, and RIGHT SPRAY VALVE)

2. Disconnect the 4-socket connector of the machine wire harness labeled RATE VALVE from the 4-pin connector of the rate-valve actuator (Figure 32).

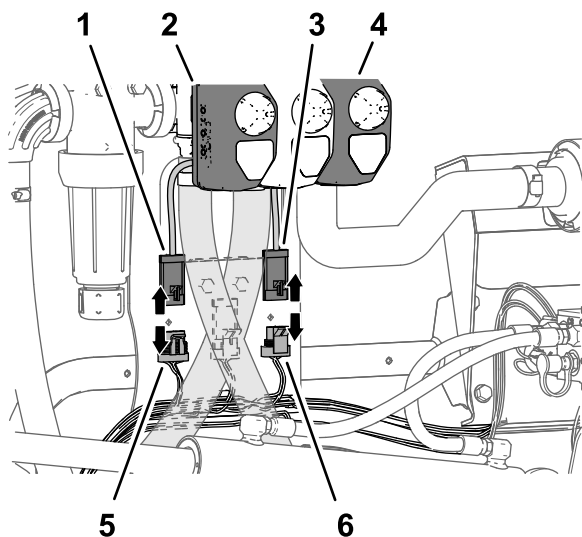


Figure 32

1. 4-pin connector (rate-valve actuator)
2. Actuator (rate valve)
3. 3-pin connector (master spray-valve actuator)
4. Actuator (master-spray valve)
5. 4-socket connector—machine wire harness (RATE VALVE)
6. 3-socket connector—machine wire harness (MASTER SPRAY VALVE)

3. Disconnect the 3-socket connector of the machine wire harness labeled MASTER SPRAY

VALVE from the 3-pin connector of the master spray-valve actuator (Figure 32).

9

Removing the Rate-Control Switch

Parts needed for this procedure:

1	Cable tie
1	Switch plug

Procedure

1. Remove the 4 flange head screws (1/4 x 1/2 inch) that secure the 3-switch panel to the control console (Figure 33).

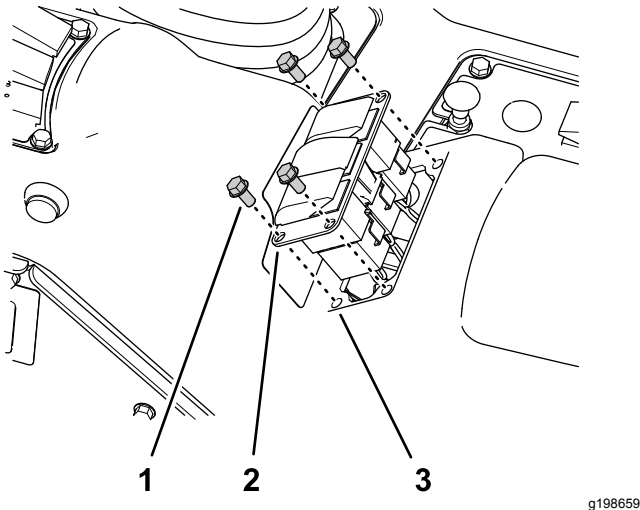


Figure 33

1. Flange head screw (1/4 x 1/2 inch)
 2. 3-switch panel
 3. Opening (control console)
2. Squeeze the lock tabs of the rate-control switch together and push up the switch out of the 3-switch panel (Figure 34).

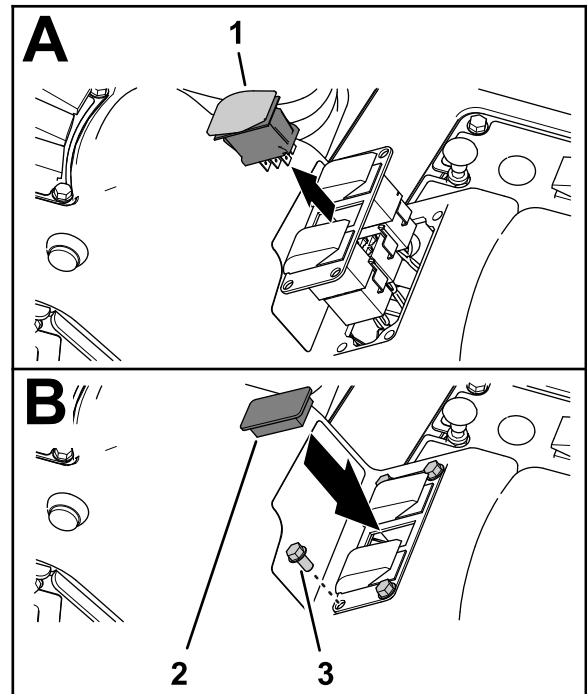


Figure 34

1. Rate-control switch
 2. Switch plug
 3. Flange head screw (1/4 x 1/2 inch)
3. Disconnect the 8-socket connector of the machine wire harness (labeled **Rate Switch**) from the 8-pin connector of the switch (Figure 33).
- Note:** You no longer need the rate switch that you removed from the machine.
4. Route the branch of the front harness for the rate switch through the opening in the 3-switch panel and secure the wiring branch against an adjacent wire branch with a cable tie.
 5. Assemble the 3-switch panel to the control console (Figure 34) with the 4 flange head screws (1/4 x 1/2 inch) that you removed in step 1.
 6. Align the switch plug to the opening in the 3-switch panel where you removed the rate switch (Figure 33).
 7. Insert the switch plug into the 3-switch panel until the plug snaps into the panel securely (Figure 33).

10

Removing the Spray Sections

No Parts Required

Removing the Spray-Section Hoses

1. At the outer spray section, remove the hose clamp that secures the sprayer-section hose to the barbed T-fitting ([Figure 35](#)).

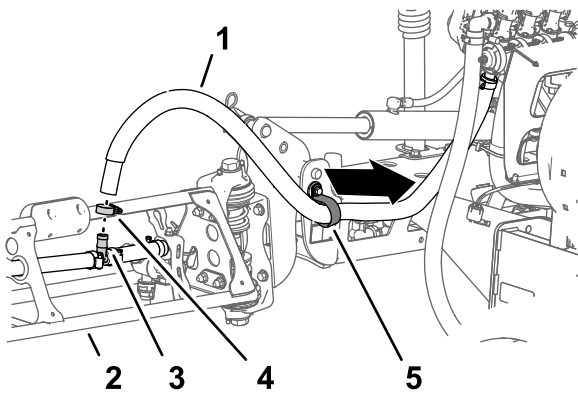


Figure 35

- | | |
|---|---------------|
| 1. Sprayer-section hose (outer-spray section) | 4. Hose clamp |
| 2. Outer-spray section | 5. R-clamp |
| 3. Barbed T-fitting | |

2. Remove the hose from the T-fitting ([Figure 35](#)).
3. Remove the free end of the hose from the R-clamp ([Figure 35](#)).
4. Repeat steps 1 through 3 for the supply hose at the other outer-spray section.
5. Under the center-spray section, remove the hose clamp that secures the supply hose for the center-spray section to the barbed T-fitting ([Figure 36](#)).

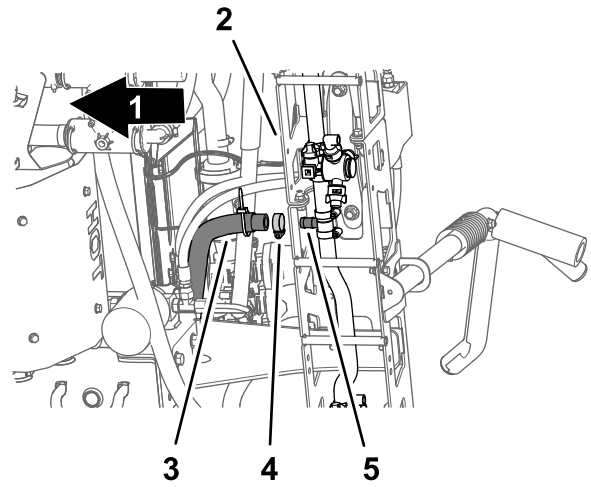


Figure 36

- | | |
|---------------------------------------|---------------------|
| 1. Front of the machine | 4. Hose clamp |
| 2. Center-spray section | 5. Barbed T-fitting |
| 3. Supply hose (center-spray section) | |

6. Remove the retainers that secure the quick couplers of the left, center, and right supply hoses from the quick couplers if the spray-section valves ([Figure 37](#)).

Note: Retain the retainers for installation in [Assembling the Hoses to Nozzle Valves 7 through 10](#) (page 60).

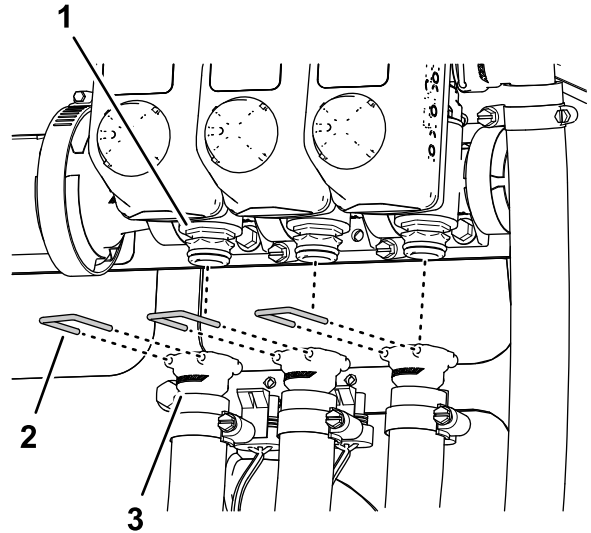


Figure 37

- | | |
|--|---------------------------------------|
| 1. Quick coupler (spray-section valve) | 3. Quick coupler (socket—supply hose) |
| 2. Retainer | |

7. Remove the left, center, and right section-supply hoses from the quick couplers of the spray-section valves, and remove the hoses from the machine ([Figure 37](#)).

Note: You no longer need the hoses for the left, center, and right section-supply hoses.

Removing the Extend and Retract Hoses for the Lift Cylinder

1. Remove the hoses from the extend ports of the left and right lift cylinders ([Figure 39](#)).


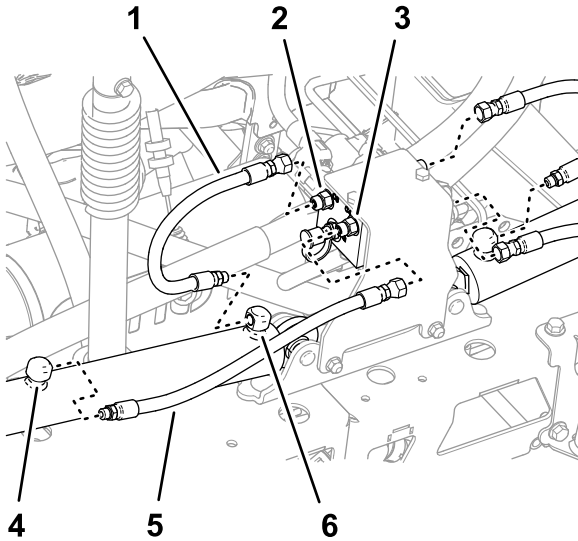


Figure 38

- | | |
|-------------------------------------|---------------------------------|
| 1. Hose (extend position) | 4. Retract port (lift cylinder) |
| 2. Port C3 (lift-cylinder manifold) | 5. Hose (retract position) |
| 3. Port C4 (lift-cylinder manifold) | 6. Extend port (lift cylinder) |

g198542

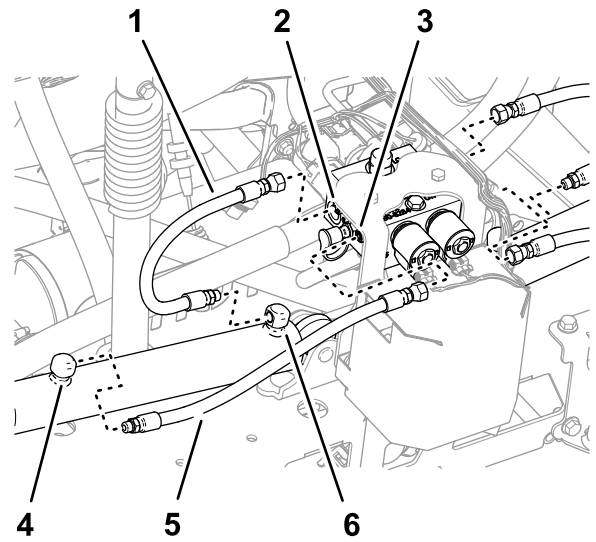

g198541

Figure 39

Machine with the Optional Ultra Sonic Boom Leveling Kit

- | | |
|-------------------------------------|---------------------------------|
| 1. Hose (extend position) | 4. Retract port (lift cylinder) |
| 2. Port C3 (lift-cylinder manifold) | 5. Hose (retract position) |
| 3. Port C4 (lift-cylinder manifold) | 6. Extend port (lift cylinder) |

2. Remove the hoses from the ports of the C2 and C4 of the lift-cylinder manifold ([Figure 39](#)).
3. Remove the hoses from the retract ports of the left and right lift cylinders ([Figure 39](#)).
4. Remove the hoses from the ports of the C1 and C3 of the lift-cylinder manifold ([Figure 39](#)).

Note: You no longer need the hoses.

Removing the Lift Cylinders

Lift equipment capacity: 91 kg (200 lb)

Note: Except where noted, retain all hardware that you remove; you will use the hardware to install the center-boom extension.

1. Use lifting equipment of the specified capacity to support the outer-spray section.
2. Remove the hairpin and clevis pin that secure the rod end of the lift cylinder to the pivot bracket ([Figure 40](#)).

Note: Retain the clevis pin and hairpin for installation in [Assembling the Lift Cylinders](#) (page 53).

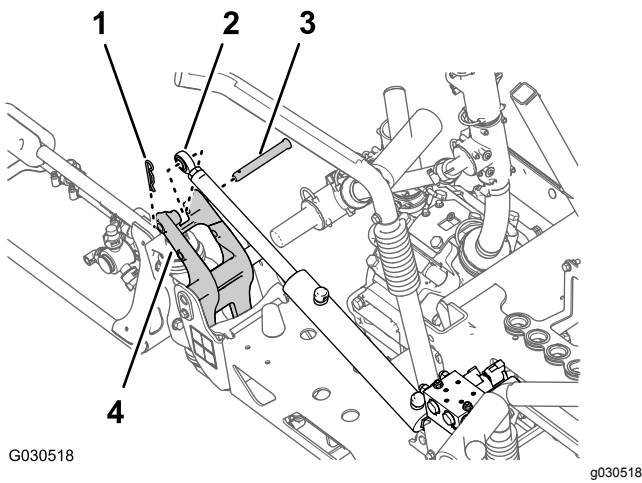


Figure 40

- | | |
|--------------------------------|------------------|
| 1. Hairpin | 3. Clevis pin |
| 2. Rod fitting (lift cylinder) | 4. Pivot bracket |

- Remove the flange locknut (5/16 inch) and flange-head bolt (5/16 x 3/4 inch) that secures the pivot pin to the cylinder mount ([Figure 41](#)).

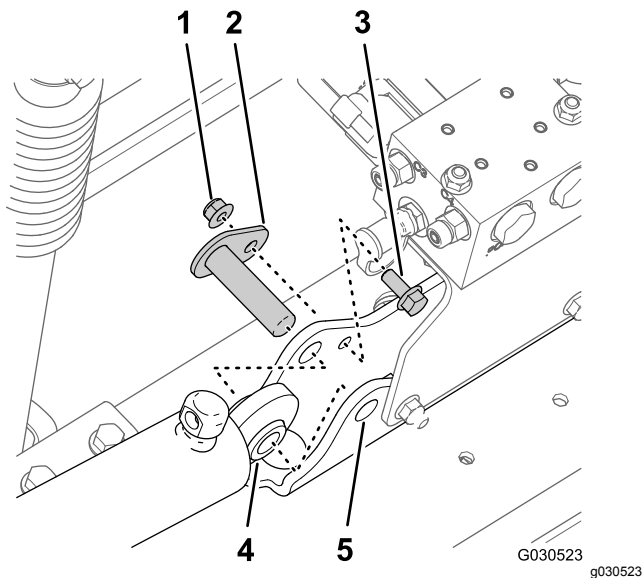


Figure 41

- | | |
|---------------------------------------|-------------------|
| 1. Flange locknut (5/16 inch) | 4. Lift cylinder |
| 2. Pivot pin | 5. Cylinder mount |
| 3. Flange-head bolt (5/16 x 3/4 inch) | |

- Remove the pivot pin and the lift cylinder from the machine ([Figure 41](#)).
- Perform the steps in [Removing the Outer-Spray Sections](#) ([page 24](#)).

Removing the Outer-Spray Sections

Lift equipment capacity: 91 kg (200 lb)

Note: If your machine is equipped with the optional covered-boom kit, leave the covers installed at the outer-spray sections.

⚠ WARNING

Lifting heavy machines and attachments improperly could result in serious injury or even death.

When lifting heavy machines and attachments, use lifting equipment, such as chains and straps, that is rated for the weight of the equipment.

Note: Except where noted, retain all hardware that you remove; you will use the hardware to install the center-boom extension.

- Remove the flange bolt (5/16 x 1 inch) and flange locknut (5/16 inch) securing the pivot pin to the pivot bracket ([Figure 42](#)).

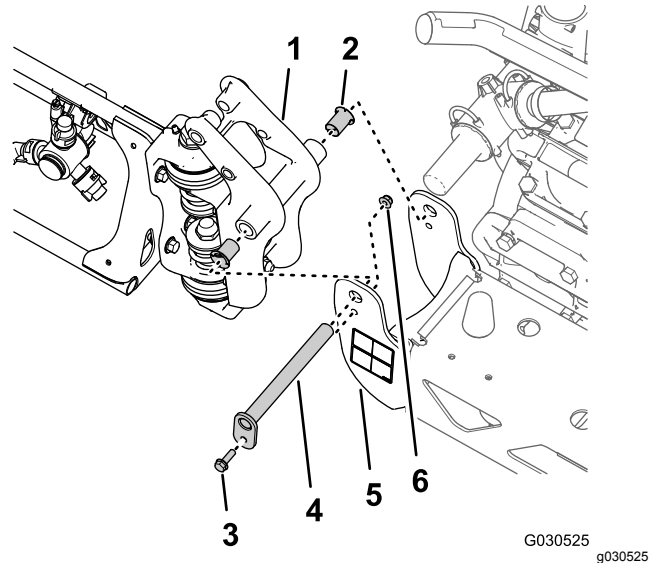


Figure 42

- | | |
|--|---|
| 1. Pivot fitting (outer-spray section) | 4. Pivot pin |
| 2. Nylon-flange bushing | 5. Pivot bracket (center-spray section) |
| 3. Flange bolt (5/16 x 1 inch) | 6. Flange locknut (5/16 inch) |

- Remove the pivot pin from the pivot bracket for the center-spray section and the pivot fitting for the outer-spray section ([Figure 42](#)).

Note: Retain the flange bolt, flange nut and pivot pin for installation in [Assembling the Outer-Spray Sections to the Machine](#) ([page 55](#)).

3. Separate the outer-spray section from the center-spray section and remove outer section from the machine ([Figure 42](#)).
 4. Remove the 2 nylon-flange bushings from the pivot fitting of the outer-spray section ([Figure 42](#)).
- Note:** Discard the bushings.
5. Repeat steps 1 through 3 in [Removing the Lift Cylinders \(page 23\)](#) for the outer-spray section at the other side of the machine.
 6. Repeat steps 1 through 4 of this section for the outer-spray section at the other side of the machine.

Removing the Section-Lift Manifold from the Center-Spray Section

1. Remove the section-lift manifold from the cylinder mount as follows:
 - **For machines without the optional ultra sonic boom leveling kit:** remove the 2 flange locknuts (5/16 inch) and 2 flange-head bolts (5/16 x 1 inch) that secure the support bracket for the section-lift manifold to the cylinder mount, and separate the manifold and bracket from the cylinder mount ([Figure 43](#)).


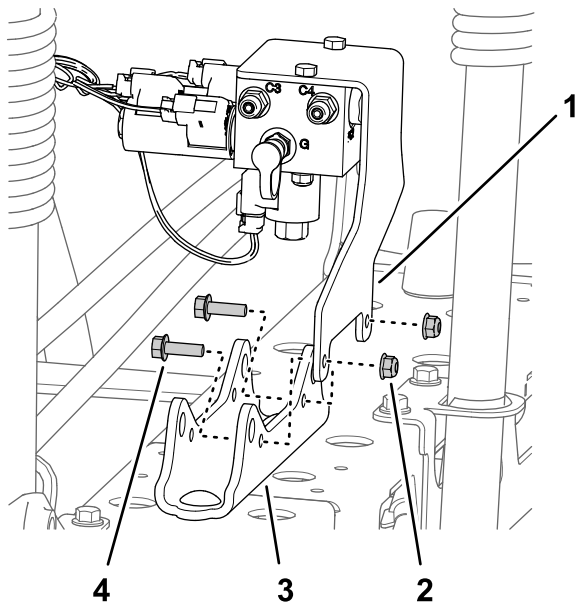


Figure 43

- | | |
|--|-------------------------------------|
| 1. Support bracket (section-lift manifold) | 3. Cylinder mount |
| 2. Flange locknut (5/16 inch) | 4. Flange-head bolt (5/16 x 1 inch) |

flange locknuts (5/16 inch) and 2 flange-head bolts (5/16 x 1 inch) that secure the support bracket for the section-lift manifold and the TEC controller bracket to the cylinder mount, and separate the manifold and bracket from the cylinder mount ([Figure 44](#)).

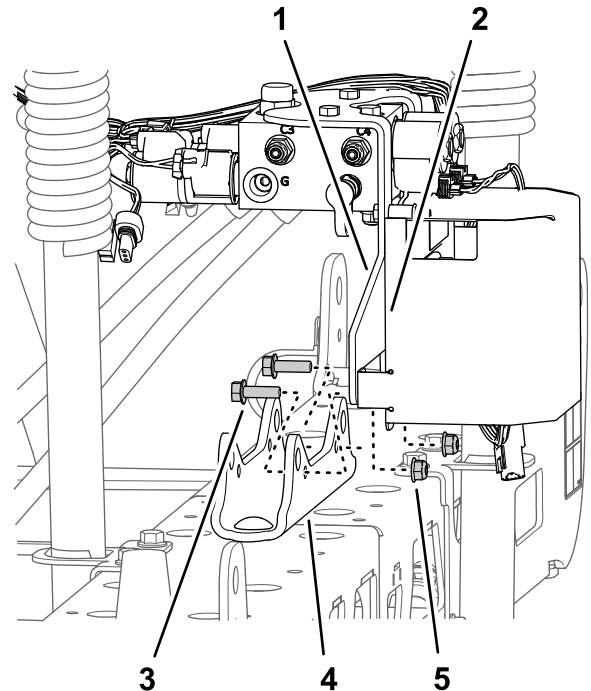

g198618

Figure 44

Machine with the Optional Ultra Sonic Boom Leveling Kit

- | | |
|--|-------------------------------|
| 1. Support bracket (section-lift manifold) | 4. Cylinder mount |
| 2. TEC controller bracket | 5. Flange locknut (5/16 inch) |
| 3. Flange-head bolt (5/16 x 1 inch) | |

2. Support the section-lift manifold by tying it to the sprayer valve mount bracket with a piece of rope.

Note: Retain the support bracket and lift manifold, bolts, and nuts for installation in [19 Assembling the Lift Cylinder Manifold to the Cylinder Mount \(page 45\)](#).

- **For machines with the optional ultra sonic boom leveling kit:** Remove the 2

Removing the Center-Spray Section

Lifting-equipment capacity: 41 kg (90 lb)

- 1. If your machine is equipped with the optional covered-boom kit, remove the cover from the center-spray sections.
- 2. Support the center-spray section with lifting equipment with the specified capacity (Figure 45).

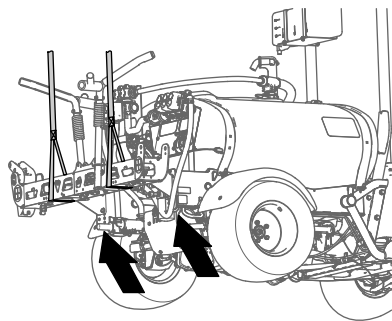


Figure 45

g198634

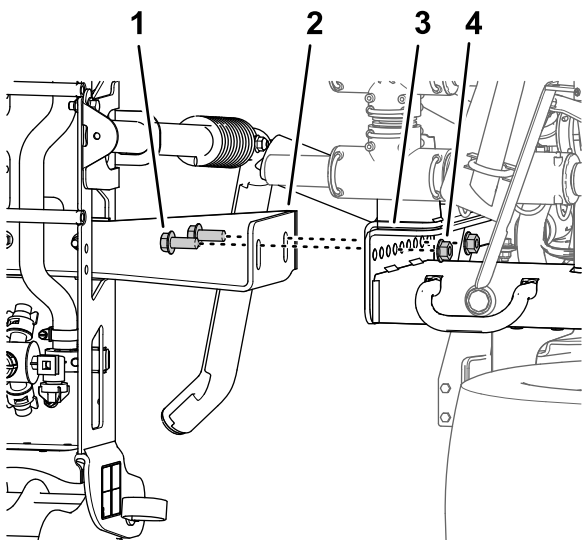


Figure 47

g198635

- 1. Flange-head bolt (1/2 x 1-1/4 inches)
- 2. Support bracket (center-spray section)
- 3. Mounting channel (sprayer frame)
- 4. Flange locknut (1/2 inch)

- 3. Use a piece of tape to mark the holes where the 4 flange-head bolts (1/2 x 1-1/4 inches) and 4 flange locknuts (1/2 inch) secure the support brackets for the center-spray section to the mounting plate of the machine (Figure 46).

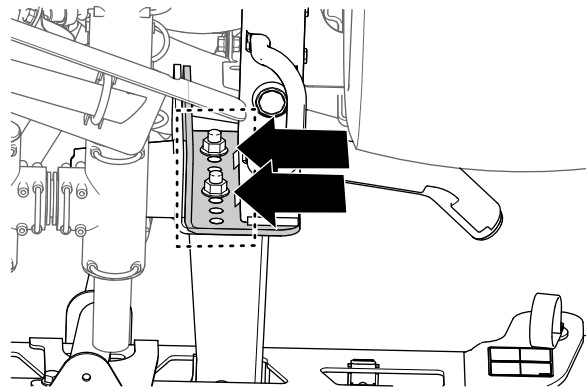


Figure 46

g198633

11 Installing the Center-Boom Extension

Parts needed for this procedure:

2	Flange-head bolt (3/8 x 1 inch)
2	Flange locknuts (3/8 inch)
1	Center-boom extension
1	Cylinder mount (wide)
1	Tie plate (wide)
4	Carriage bolt (1/2 x 1-1/4 inches)
4	Flange locknut (1/2 inch)

- 4. Remove the 4 flange-head bolts (1/2 x 1-1/4 inches) and 4 flange locknuts (1/2 inch) that secure the support brackets of the center-spray section to the mounting plate on the frame for the machine, and remove the center-spray section from the machine (Figure 47).

Note: Retain the bolts and locknuts for installation of the new center-spray section.

Removing the Sprayer Nozzles

- 1. At the center-spray section, remove the flanged locknut that secures the sprayer nozzle to the nozzle mount (Figure 48 and Figure 49).

Note: Retain the locknut for installation in step 6 of [Installing the Sprayer Nozzles and Hoses to the Center-Spray Section](#) (page 31).

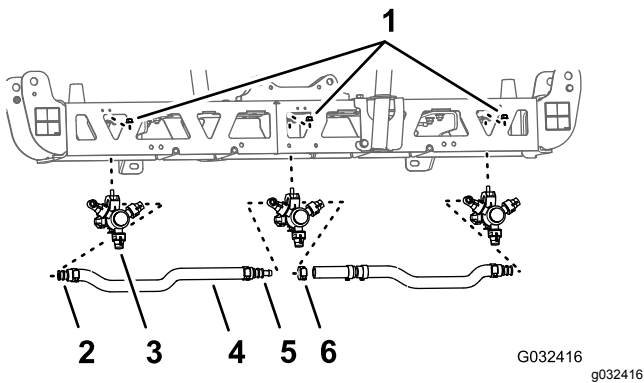


Figure 48

- | | |
|--|--|
| 1. Flange locknut (5/16 inch) | 4. Hose (3/4 inch inside diameter) |
| 2. Single barbed-hose shank (3/4 inch) | 5. Double barbed-hose shank (3/4 inch) |
| 3. Sprayer nozzle | 6. Hose clamp |

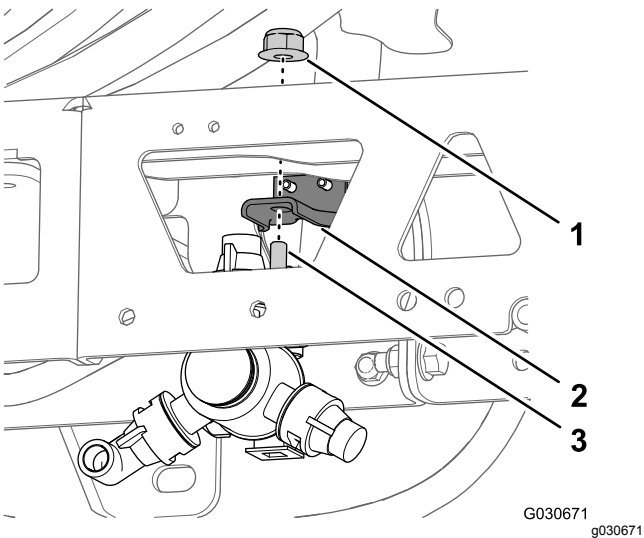


Figure 49

- | | |
|-------------------------------|---|
| 1. Flange locknut (5/16 inch) | 3. Hex-head bolt (5/16 x 3/4 inch—sprayer nozzle) |
| 2. Nozzle mount | |

- Remove the stainless steel screw (#12 x 1-1/4 inches) that secures the upper clamp half and double or single barbed-hose shank (3/4 inch) to the body of the sprayer nozzle, and separate the barbed-hose shank and hose from the nozzle (Figure 50).

Note: The hex-head bolt (5/16 x 3/4 inch—stainless steel) will separate from the upper clamp half when you open the clamp, retain the bolt for installation.

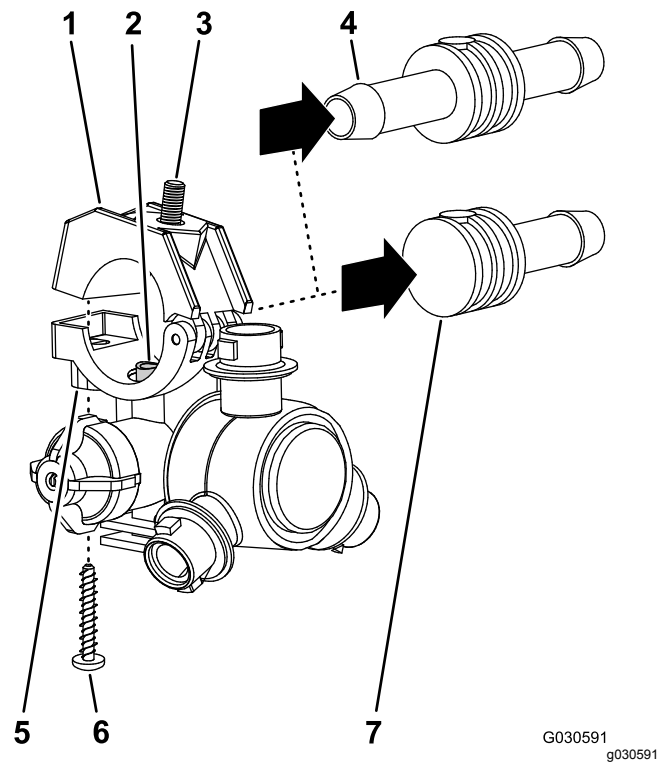


Figure 50

- | | |
|--|---|
| 1. Upper clamp half | 5. Saddle (sprayer-nozzle body) |
| 2. Transfer tube | 6. Stainless steel screw (#12 x 1-1/4 inches) |
| 3. Hex-head bolt (5/16 x 3/4 inch—stainless steel) | 7. Single barbed-hose shank (3/4 inch) |
| 4. Double barbed-hose shank (3/4 inch) | |

- Remove the nozzle from the center-spray section (Figure 48 and Figure 49).
- Repeat steps 1 and 2 for the other 2 sprayer nozzles.

Note: Retain the sprayer nozzles, stainless steel screws, and hex-head bolts for installation in step 6 and 7 of [Assembling the Sprayer Nozzles and Hoses for the Center-Spray Section](#) (page 30).

- Remove the hoses (3/4 inch inside diameter), barbed-hose shanks, clamps and barbed T-fitting from the center-spray section (Figure 48).

Note: You no longer need the hose, hose shanks, clamps, and T-fitting.

Removing the Support Brackets from the Center-Spray Section

Lifting-equipment capacity: 41 kg (90 lb)

- Support the center-spray section with lifting equipment with the specified capacity.

- Remove the 2 flange-head bolts (3/8 x 1 inch) and 2 flange locknuts (3/8 inch) that secure the support bracket to the center-spray section, and remove the bracket ([Figure 51](#)).

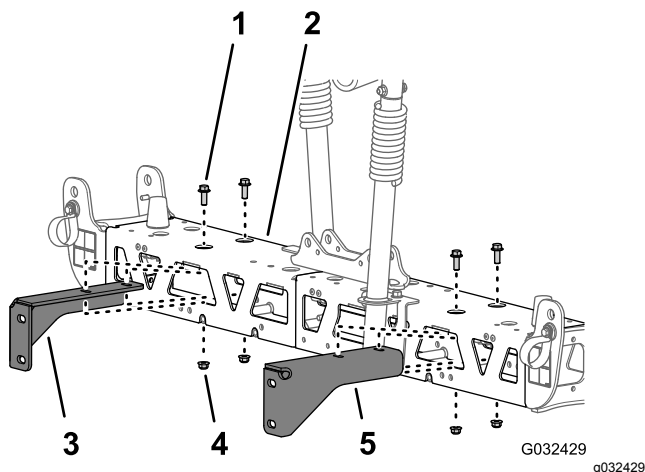


Figure 51

- Flange-head bolt (3/8 x 1 inch)
- Center-spray section
- Right support bracket (center-spray section)
- Flange locknut (3/8 inch)
- Left support bracket (center-spray section)

- Remove the 2 flange-head bolts (3/8 x 1 inch) and 2 flange locknuts (3/8 inch) that secure the other support bracket to the center-spray section, and remove the bracket ([Figure 51](#)).

Note: Retain the support brackets, bolts, and locknuts for installation in steps 3 and 4 of [Assembling the Support Brackets to the Center-Spray Section](#) (page 30).

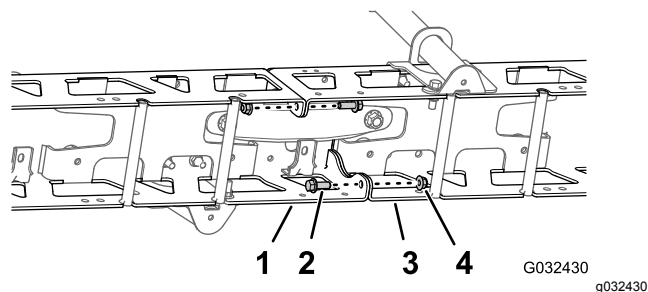


Figure 52

- Left truss frame
- Flange-head bolt (3/8 x 1 inch)
- Right truss frame
- Locknuts (3/8 inch)

- Remove the 2 carriage bolts (1/2 x 1-1/4 inches) and 2 locknuts (1/2 inch) that secure the narrow cylinder mount, left and right truss frames, and narrow tie plate ([Figure 53](#)).

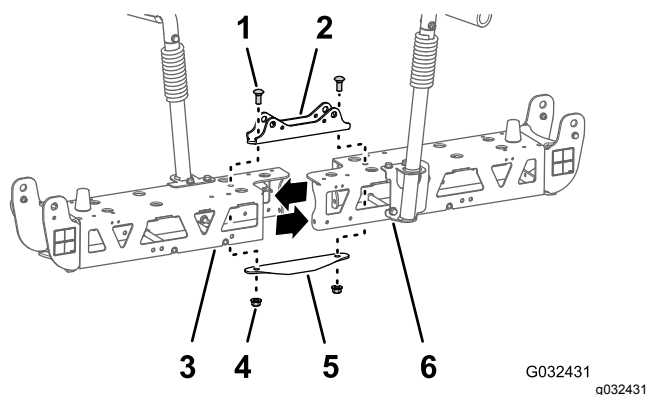


Figure 53

- Carriage bolt (1/2 x 1-1/4 inches)
- Cylinder mount (narrow)
- Left truss frame
- Locknuts (1/2 inch)
- Tie plate (narrow)
- Right truss frame

Note: Retain the flange-head bolts, carriage bolts, and locknuts for installation in steps 2 and 7 of [Installing the Center-Boom Extension](#) (page 28). You no longer need the narrow cylinder mount and narrow tie plate.

- Separate the left and right truss frames.

Separating the Center-Spray Section Trusses

- Remove the 2 flange head bolts (3/8 x 1 inch) and 2 locknuts (3/8 inch) that secure the vertical flanges of the left and right truss frames ([Figure 52](#)).

Installing the Center-Boom Extension

- Align the holes in vertical flanges of the center-boom extension with the holes in the truss frame ([Figure 54](#)).

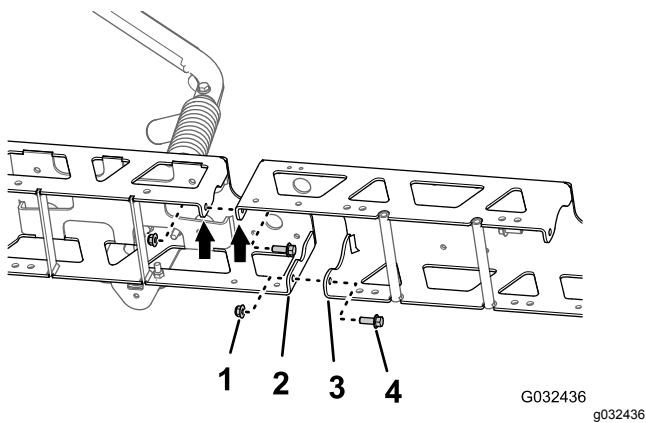


Figure 54

- | | |
|----------------------------------|--|
| 1. Flange locknut (3/8 inch) | 3. Vertical flange (center-boom extension) |
| 2. Vertical flange (truss frame) | 4. Flange-head bolt (3/8 x 1 inch) |

- Loosely assemble the center-boom extension to the truss frame ([Figure 54](#)) with the 2 flange-head bolts (3/8 x 1 inch) and 2 flange locknuts (3/8 inch) that you removed in step 1 of [Separating the Center-Spray Section Trusses](#) (page 28).
- Align the holes in vertical flanges of the center-boom extension with the holes in the other truss frame ([Figure 54](#)).
- Loosely assemble the center-boom extension to the other truss frame ([Figure 54](#)) with the 2 flange-head bolts (3/8 x 1 inch) and 2 flange locknuts (3/8 inch) from the GeoLink spray system finishing kit ([Figure 54](#)).
- Align the holes in the cylinder mount with the holes at the centerline of the truss frame and center-boom extension ([Figure 55](#)).

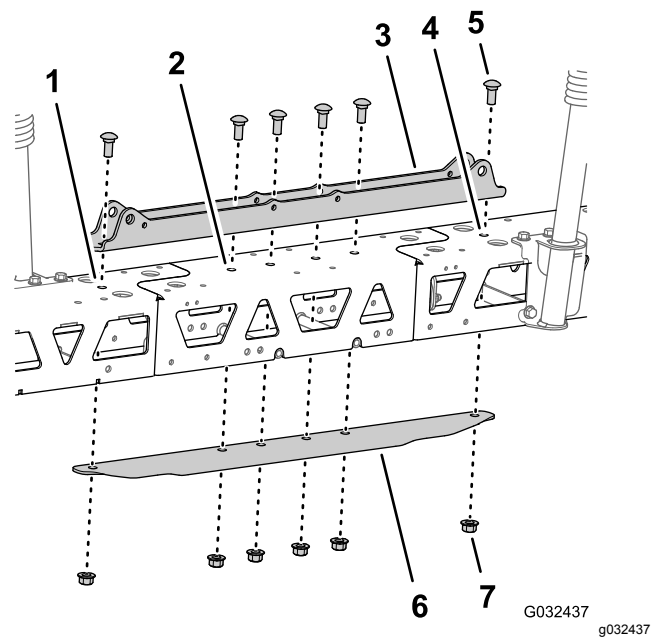


Figure 55

- | | |
|--------------------------|---------------------------------------|
| 1. Left truss frame | 5. Carriage bolt (1/2 x 1-1/4 inches) |
| 2. Center-boom extension | 6. Tie plate (wide) |
| 3. Cylinder mount (wide) | 7. Flange locknut (1/2 inch) |
| 4. Right truss frame | |

- Insert the tie plate into the truss frame and center-boom extension and align the hole in the tie plate with the holes at the centerline of the trusses and boom extension ([Figure 55](#)).
- Assemble the cylinder mount, trusses, center-boom extension, and tie plate with the 2 carriage bolt (1/2 x 1-1/4 inches) and 2 flange locknut (1/2 inch) that you removed in step 2 of [Separating the Center-Spray Section Trusses](#) (page 28), and the 4 carriage bolt (1/2 x 1-1/4 inches) and 4 flange locknut (1/2 inch) from the GeoLink spray system finishing kit ([Figure 55](#)).
- Torque the 3/8 inch flange head bolts and flange locknuts to 37 to 45 N·m (27 to 33 ft-lb).
- Torque the 1/2 inch flange locknuts to 91 to 113 N·m (67 to 83 ft-lb).

12

Installing the Mount Brackets and Sprayer Nozzles to the Center-Spray Section

Parts needed for this procedure:

2	Sprayer nozzle
2	Hose assembly (sprayer valve 5 or 6)
2	Flange locknut (5/16 inch)

Assembling the Support Brackets to the Center-Spray Section

Lifting-equipment capacity: 55 kg (120 lb)

1. Support the center-spray section with lifting equipment with the specified capacity.
2. Align the holes in the right support bracket to the holes in the right truss frame as shown in [Figure 56](#).

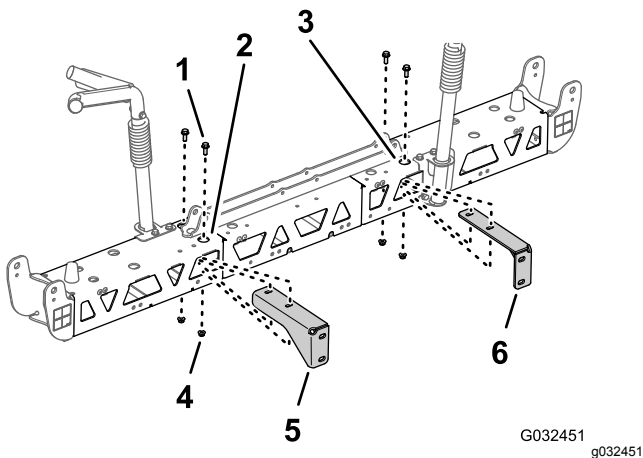


Figure 56

1. Flange-head bolt (3/8 x 1 inch)
2. Right truss frame (center-spray section)
3. Left truss frame (center-spray section)
4. Flange locknut (3/8 inch)
5. Right support bracket (center-spray section)
6. Left support bracket (center-spray section)

3. Assemble the right support bracket to the right truss frame ([Figure 56](#)) with the 2 flange-head bolts (3/8 x 1 inch) and 2 flange locknut (3/8 inch) that you removed in steps 2 and 3 of [Removing the Support Brackets from the Center-Spray Section](#) (page 27).

4. Repeat steps 2 and 3 for the left support bracket at the left truss frame ([Figure 56](#)).
5. Torque the flange head bolts and flange nuts to 37 to 45 N·m (27 to 33 ft-lb).

Assembling the Sprayer Nozzles and Hoses for the Center-Spray Section

1. Using lifting equipment, raise the new center-spray section to a comfortable working height.
2. Working with the 2 sprayer nozzle from the GeoLink spray system finishing kit, remove the stainless steel screw that secures the upper clamp half to the saddle ([Figure 57](#)).

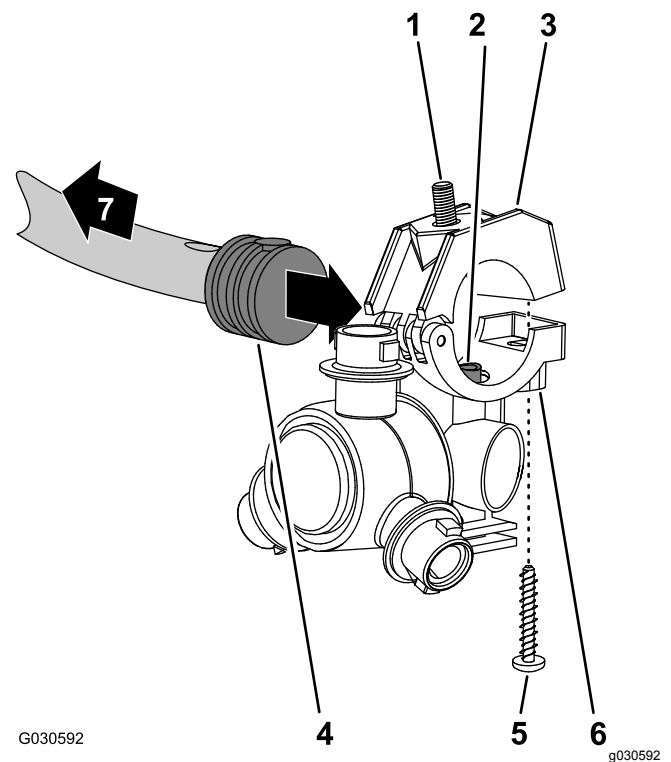


Figure 57

1. Hex-head bolt (5/16 x 3/4 inch—stainless steel)
2. Transfer tube
3. Upper clamp half
4. Single barbed-hose shank (1/2 inch)
5. Stainless steel screw (#12 x 1-1/4 inches)
6. Sprayer-nozzle body
7. Toward the spray section

3. Locate the hole in the side of single barbed-hose shank at the end of the hose 25 cm (10 inches) of the hose assembly (sprayer valve 5 or 6) for the center-spray section ([Figure 57](#) and [Figure 58](#)).

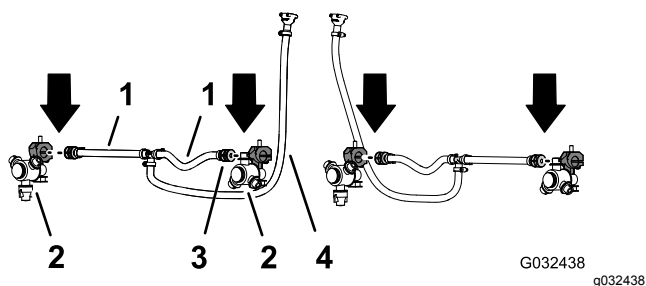


Figure 58

1. Hose 13 x 250 mm (1/2 x 10 inches—sprayer valve 5 or 6)
2. Sprayer nozzle
3. Single barbed-hose shank 13 mm (1/2 inch)
4. Hose and barbed coupler 13 x 810 mm (1/2 x 32 inches—sprayer valve 5 or 6)

4. Align the transfer tube in the saddle of a sprayer nozzle (Figure 57) with the hole in the side of the single barbed-hose shank (1/2 inch).
5. Close the upper clamp half around the barbed-hose shank and secure the clamp half and spray-nozzle body (Figure 57) with the stainless steel screw (#12 x 1-1/4 inches); torque the stainless steel screw to 14 to 18 N·m (20 to 25 in-lb).

Important: Do not tighten the stainless steel screw more than the torque specification in step 5.

Note: Ensure that the hex-head bolt (5/16 x 3/4 inch) is seated in the recess in the upper clamp half when closing the clamp.

6. Working with the sprayer nozzle, hex-head bolt, and stainless steel screw that you removed in steps 1 and 2 of [Removing the Sprayer Nozzles \(page 26\)](#), repeat steps 3 through 5 to the single barbed-hose shank (Figure 57 and Figure 58) at the end of the other hose 25 cm (10 inches).
7. Working with the 2 sprayer nozzles that you removed in step 4 of [Removing the Sprayer Nozzles \(page 26\)](#), repeat steps 3 through 5 to the single barbed-hose shanks of the other hose assembly (sprayer valve 5 or 6) for the center-spray section (Figure 57 and Figure 58).

Installing the Sprayer Nozzles and Hoses to the Center-Spray Section

1. Route the hose 13 mm (10 inches) and nozzle assembly between the truss braces of the outer truss (Figure 59).

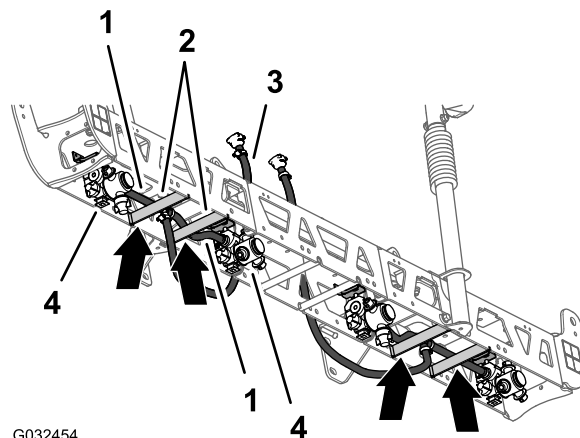


Figure 59

1. Hose 13 x 250 mm (1/2 x 10 inches)
2. Truss braces (left truss)
3. Hose and barbed coupler 13 x 810 mm (1/2 x 32 inches)
4. Sprayer nozzle

2. Route the hose and nozzle above the truss brace and outward to the outboard nozzle mount (Figure 59).
3. Align the hex-head bolt (5/16 x 3/4 inch) of the sprayer nozzle through the hole in the nozzle mount and loosely secure the nozzle to the mount with a flange locknut (5/16 inch) from the GeoLink spray system finishing kit (Figure 60).


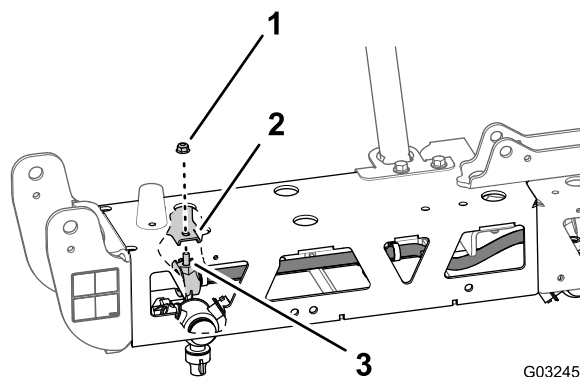


Figure 60

1. Flange locknut (5/16 inch)
2. Nozzle mount (outboard)
3. Hex-head bolt (5/16 x 3/4 inch—stainless steel)

4. Route the other hose 13 mm (10 inches) and nozzle assembly between the s truss braces of the outer truss (Figure 59).

5. Route the hose and nozzle above the truss brace and inward to the inboard nozzle mount (Figure 59).
6. Align the hex-head bolt (5/16 x 3/4 inch) of the sprayer nozzle through the hole in the nozzle mount (Figure 60) and loosely secure the nozzle to the mount with a flange locknut (5/16 inch) that you removed in steps 1 and 4 of Removing the Sprayer Nozzles (page 26).
7. Torque the flange locknut to 1978 to 2542 N·cm (175 to 225 in·lb).
8. Route the hose and barbed coupler 13 x 810 mm (1/2 x 32 inches) to the side of the center-spray section with the left and right support brackets (Figure 59).
9. Repeat steps 1 through 8 for the other hose and nozzle assembly at the other outer truss (Figure 59 and Figure 60).

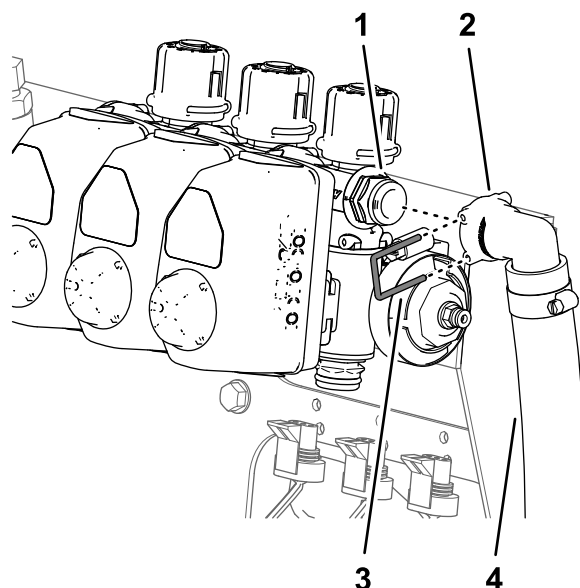


g198705

Figure 61

1. Quick-disconnect fitting (right section-bypass valve)
2. Quick-disconnect fitting (90° socket—bypass hose)
3. Retainer (small)
4. Bypass hose

- **For machines with the optional hand wand kit or optional electric hose reel kit, perform the following steps:**
 - A. Remove the retainer that secures the quick connect fitting of the shutoff valve to the quick-disconnect socket of the right section-bypass valve, and separate the valve from the socket (Figure 62).

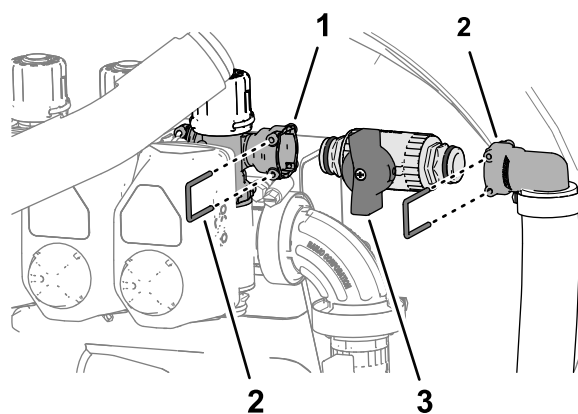

g263988

Figure 62

1. Quick connect socket (right section-bypass valve)
2. Quick-disconnect coupling (90° barbed fitting)
3. Retainer
4. Quick connect fitting (shutoff valve)

- B. Remove the retainer that secures the quick connect fitting of the shutoff valve

13

Removing the Boom-Section Valves

Parts needed for this procedure:

3	Cap (quick coupler)
3	Retainer

Removing the Section Bypass Hose

1. Remove the upper end of the bypass hose as follows:
 - **For machines without the optional hand wand kit or optional electric hose reel kit,** remove the small retainer that secures the quick-disconnect fitting of the bypass hose to the quick-disconnect fitting of the right section-bypass valve (Figure 61).

to the quick-disconnect socket of the 90° barbed fitting, and separate the valve from the socket (Figure 62).

Note: Retain the shutoff valve and retainers for installation in [Assembling the Shutoff Valve to the Bypass Hose](#) (page 44).

2. Remove the large retainer that secures the 90° barbed fitting at the lower end of the bypass hose to the bulkhead fitting of the sprayer tank (Figure 63).

Note: Retain the large retainer for installation in [Assembling the Bypass Hoses to the Tank](#) (page 44).

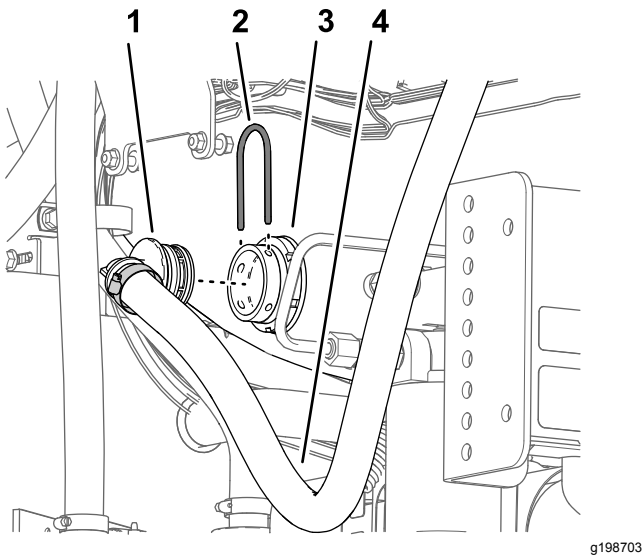


Figure 63

- | | |
|-----------------------|---------------------|
| 1. 90° barbed fitting | 3. Bulkhead fitting |
| 2. Retainer (large) | 4. Bypass hose |

3. Remove the bypass hose from the machine.

Note: You no longer need the bypass hose and the small retainer.

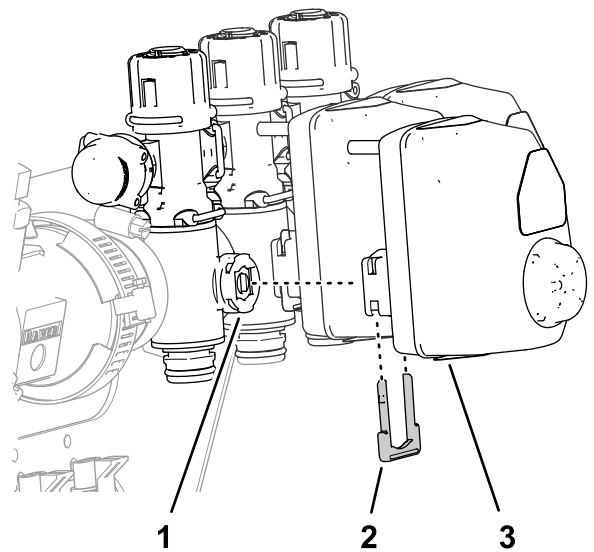


Figure 64

- | | |
|------------------|-------------------|
| 1. Section valve | 3. Valve actuator |
| 2. Retainer | |

2. Remove the valve actuators from the left, center, and right section valves (Figure 64).
3. Remove the retainer that secures the cap to the quick disconnect fitting of the bypass valve, and remove the cap (Figure 65).

Note: You no longer need the cap.

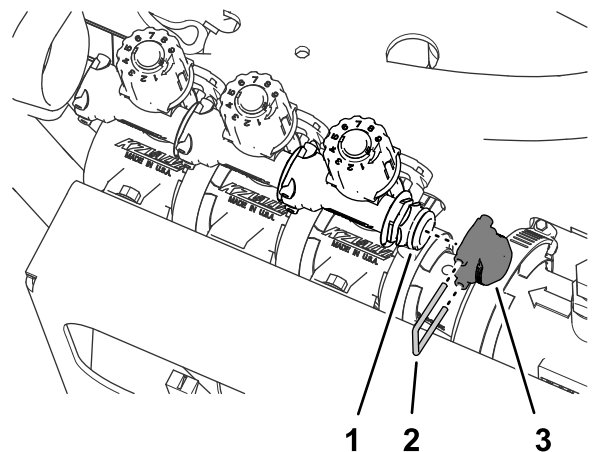


Figure 65

- | | |
|--|--------|
| 1. Quick disconnect fitting (bypass valve) | 3. Cap |
| 2. Retainer | |

Positioning the Bypass Valves—Machines without the Optional Hand Spray Wand Kit or the Optional Electric Hose Reel Kit

1. Remove the 3 retainers that secure the 3 valve actuators to the left, center, and right section valves (Figure 64).

4. Remove the 3 retainers that secure the 3 bypass valves to the left, center, and right section valves (Figure 66).

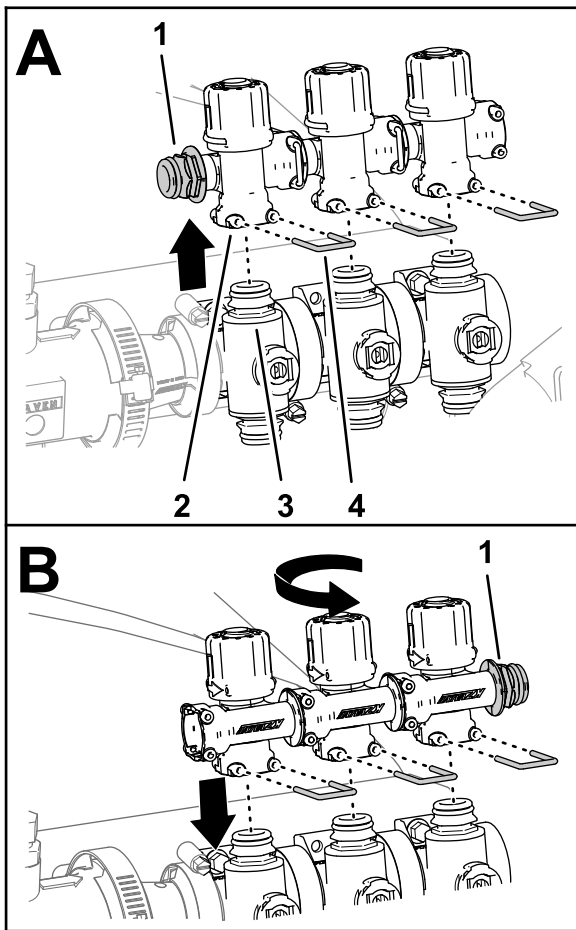


Figure 66

g200486

1. Quick disconnect fitting
 2. Quick connect fitting—socket (bypass valve)
 3. Quick connect fitting (section valve)
 4. Retainer
5. Lift the bypass valves from the section valves ([Figure 66](#)).
 6. Rotate the bypass valves 180° and assemble them onto the quick disconnect fittings of the section valves ([Figure 66](#)).
 7. Secure the 3 bypass valves to the section valves with the 3 retainers that you removed in step 4 ([Figure 66](#)).
 8. Assemble plug into the quick connect socket of the bypass valve ([Figure 67](#)).

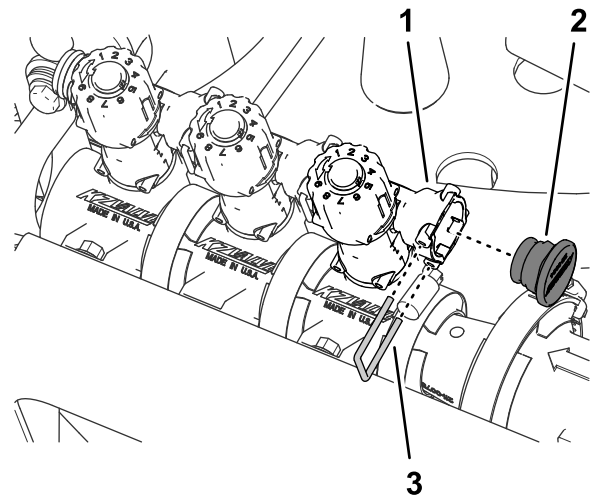


Figure 67

g200481

1. Quick connect socket (bypass valve)
 2. Plug
 3. Retainer
9. Secure the plug to the quick connect socket with the retainer that you removed in step 3 ([Figure 67](#)).
 10. Assemble the 3 valve actuators onto the left, center, and right section valves ([Figure 64](#)) with the retainers that you removed in step 1.

Removing the Section Valves from the Manifold Mount

Note: You will add the section valves to the valves for the 10-valve GeoLink sprayer system in [Assembling the 3 Section Valves to the Valve Mount](#) (page 49).

1. Remove the 2 flange-head bolts (1/4 x 3/4 inch) and 2 locknuts (1/4 inch) that secure the left boom-section valve to the manifold mount ([Figure 68](#)).

Note: You no longer need the 2 flange head bolts and locknuts.

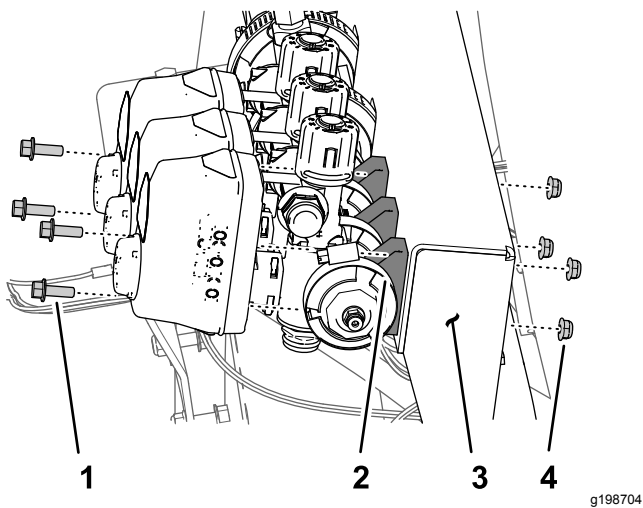


Figure 68

g198704

- | | |
|--------------------------------------|-----------------------|
| 1. Flange-head bolt (1/4 x 3/4 inch) | 3. Manifold mount |
| 2. Section valve | 4. Locknut (1/4 inch) |

- Remove the 2 flange-head bolts (1/4 x 3/4 inch) and 2 locknuts (1/4 inch) that secure the right boom-section valve to the manifold mount (Figure 68).
- Remove the flange clamp 40 to 64 mm (1-9/16 to 2-1/2 inches) and gasket 25 x 35 mm (1 x 1-3/8 inches) that secures the flange of the left section valve to the adapter (Figure 68).

Note: Retain the 2 flange-head bolts, 2 locknuts, flange clamp and gasket for installation in [Assembling the 3 Section Valves to the Valve Mount](#) (page 49).

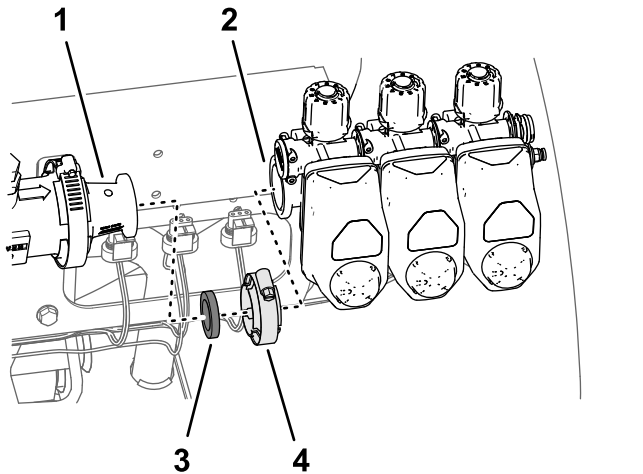


Figure 69

g198706

- | | |
|--------------------------------|--|
| 1. Adapter | 3. Gasket 25 x 35 mm (1 x 1-3/8 inches) |
| 2. Flange (left section valve) | 4. Flange clamp 40 to 64 mm (1-9/16 to 2-1/2 inches) |

- Remove the 3 section valves from the machine (Figure 69).

- Remove the decals from the actuators of the 3 section valves (Figure 70).

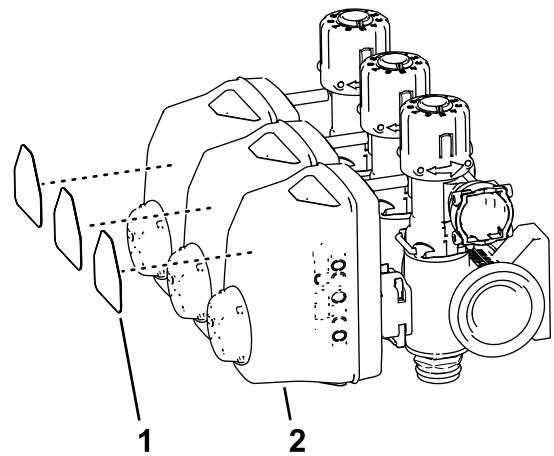


Figure 70

g201434

- | | |
|------------------------|-----------------------------|
| 1. Section-valve decal | 2. Actuator (section valve) |
|------------------------|-----------------------------|

- Remove the flange clamp 51 mm (2 inches) and gasket 38 mm (1-1/2 inches) that secure the flange of the adapter to the flange of the flow meter (Figure 71).

Note: Retain the flange clamp and gasket for installation in [Assembling the Manifold to the Flow Meter](#) (page 43).

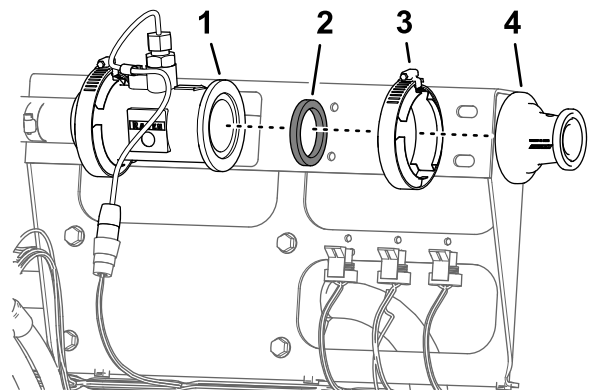


Figure 71

g198707

- | | |
|------------------------|----------------------------------|
| 1. Flange (flow meter) | 3. Flange clamp 51 mm (2 inches) |
| 2. Gasket | 4. Adapter |

14

Installing the Flow Meter Support Clamps

Parts needed for this procedure:

1	Flow meter mount
4	Support-clamp half
4	Bolt (1/4 x 4-1/2 inches)
4	Flange locknuts (1/4 inch)

Removing the Section-Valve Bracket

1. Disconnect the 3-socket connector of the machine wire harness labeled FLOW METER from the 3-pin connector of the flow meter (Figure 72).

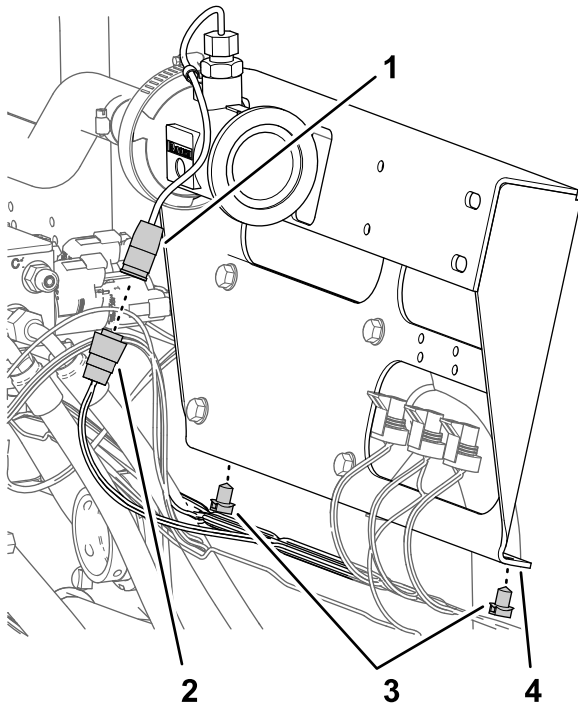


Figure 72


g198719

1. 3-pin connector (flow meter)
2. 3-socket connector (machine wire harness—FLOW METER)
3. Push-in fasteners
4. Section-valve bracket

2. Remove the 2 push-in fasteners of the machine wire harness from the bottom flange of the section-valve bracket (Figure 72).

3. Remove the 4 flange-head screws (5/16 x 3/4 inch) that secure the section-valve bracket from the valve mount, and remove the valve bracket from the machine (Figure 73).

Note: Retain the 4 flange-head screws for installation in [Installing the Flow Meter Mount and Clamps](#) (page 36); you no longer need the section-valve bracket.

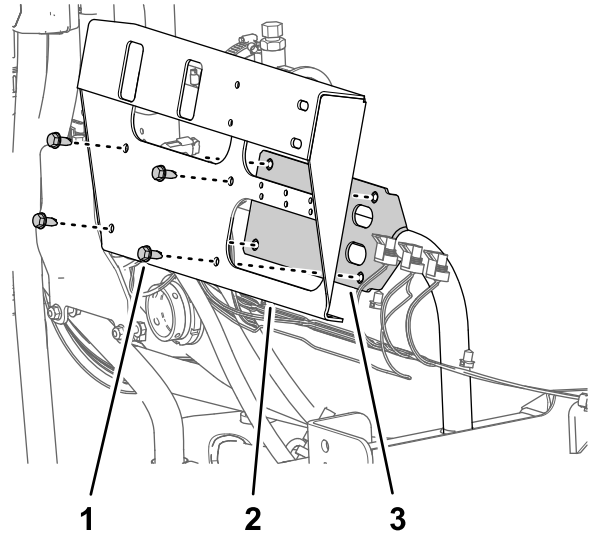

g198720

Figure 73

1. Flange-head screw (5/16 x 3/4 inch)
2. Section-valve bracket
3. Valve mount

Installing the Flow Meter Mount and Clamps

1. Align the holes in the flow-meter bracket with the holes in the valve mount (Figure 74).

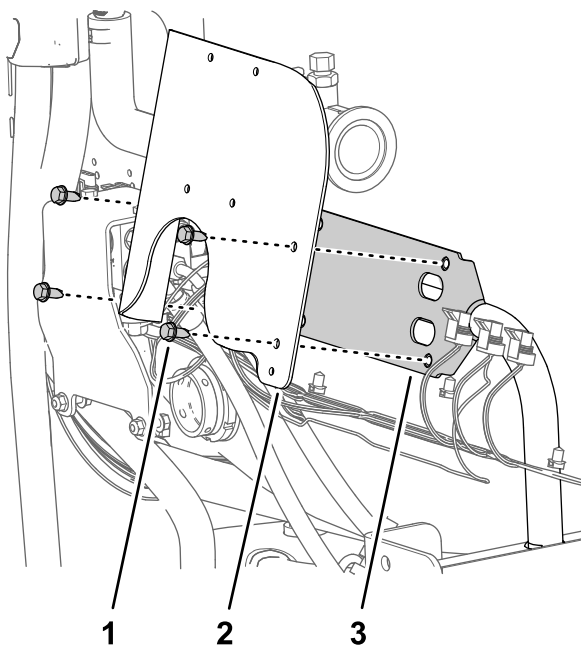


Figure 74

g198737

1. Flange-head screw (5/16 x 3/4 inch)
2. Flow-meter bracket
3. Valve mount

2. Assemble the flow-meter bracket to the valve mount with the 4 flange-head screws that you removed in step 3 of [Removing the Section-Valve Bracket \(page 36\)](#), and torque the screws to 1978 to 2542 N·cm (175 to 225 in-lb).
3. Align a 2 support-clamp halves between the flow meter and the flow-meter bracket, and align the holes in the clamp halves with the holes in the bracket ([Figure 75](#)).

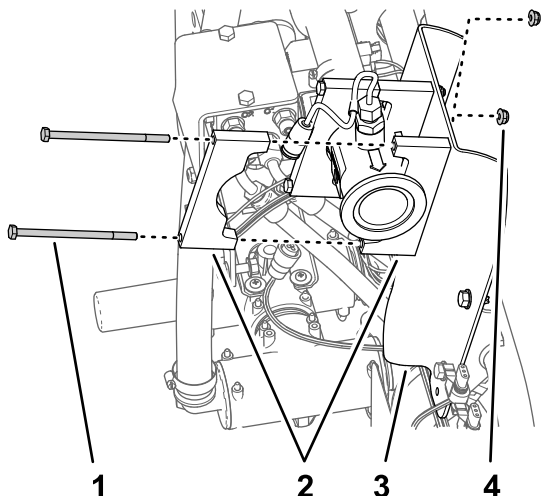


Figure 75

g198736

1. Bolt (1/4 x 4-1/2 inches)
2. Support-clamp half
3. Flow-meter bracket
4. Flange locknut (1/4 inch)

4. Align a support clamp half at the rear side of the flow meter with 1 of the clamp halves that you assembled in step 3 ([Figure 75](#)).
5. Assemble the pair of clamp halves to the flow meter bracket ([Figure 75](#)) with 2 bolts (1/4 x 4-1/2 inches) and 2 flange locknuts (1/4 inch).
6. Repeat steps 4 and 5 at the other clamp half that you assembled in step 3.
7. Torque the bolts and nuts to 1017 to 1243 N·cm (90 to 110 in-lb).


15

Assembling the Wire Harness to the Machine

Parts needed for this procedure:

1	Rear wire harness
7	Cable tie

Routing Kit Wire Harness

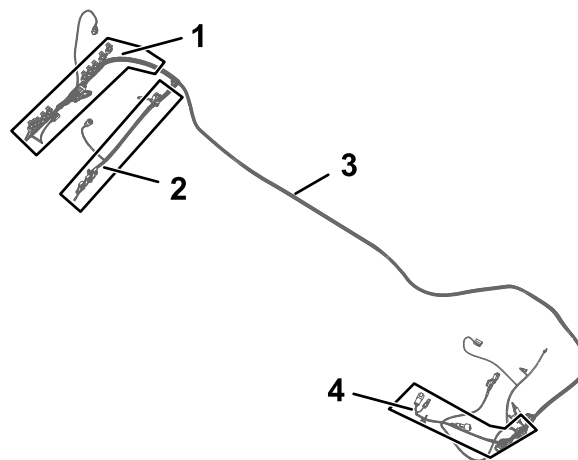

g198815

Figure 76

1. 102 cm (40 inch) wire-harness branch—ASC10 and NOZZLE-VALVES 1 through 10
2. 89 cm (35 inch) wire-harness branch—RATE VALVE, MASTER VALVE, FLOW METER, LEFT SPRAY, CENTER SPRAY, and RIGHT SPRAY
3. Kit wire harness 457 cm (180 inch)
4. 84 cm (33 inch) wire-harness branch—PUMP CLUTCH


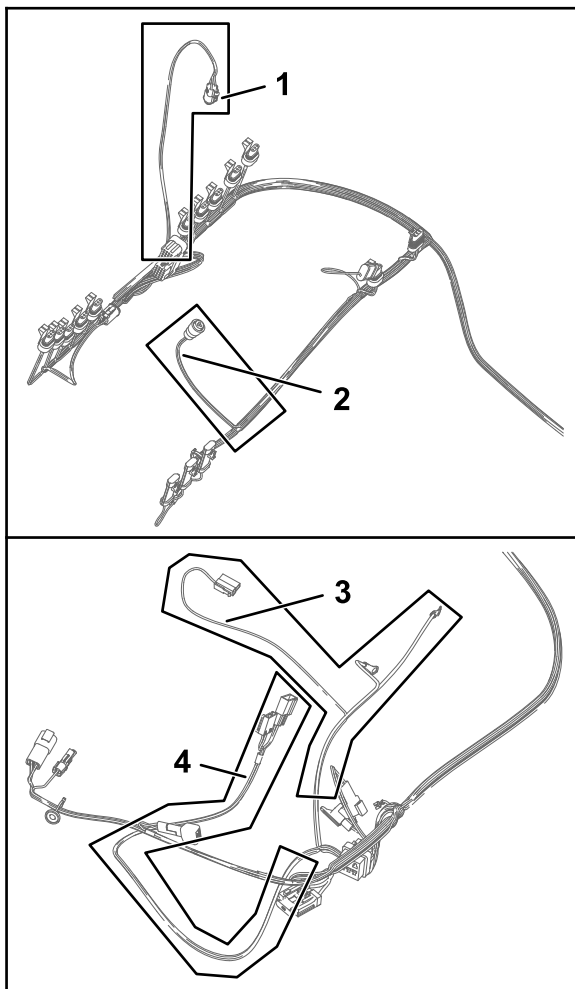


Figure 77

g198814

1. 61 cm (24 inch) wire-harness branch—PRESSURE TRANSDUCER GREEN WEDGE
2. 23 cm (9 inch) wire-harness branch—FLOW METER
3. 60 cm (23-1/2 inch) wire-harness branch—TO BATTERY POSITIVE, battery negative, and alternator
4. 66 cm (26 inch) wire-harness branch—ASC 10 ENABLE RELAY, 50 A FUSE, DIODE, SW'D PWR FOR GEN 2 TOPCON, and ASC 10 power and CAN from X25

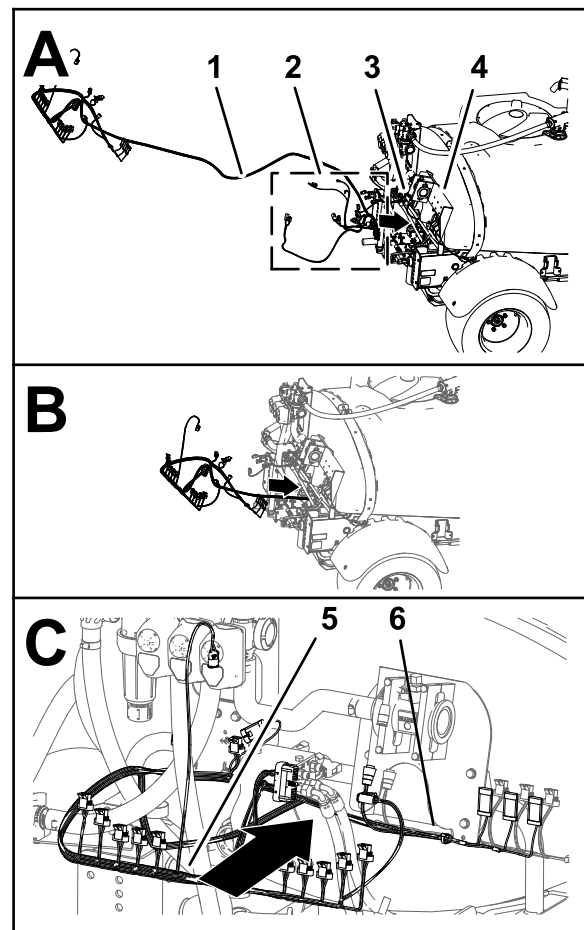

g198861

Figure 78

1. Kit wire harness 457 cm (180 inch)
2. 84 cm (33 inch) wire-harness branch, 60 cm (23-1/2 inch) wire-harness branch, and 66 cm (26 inch) wire-harness branch
3. Machine wire harness
4. Manifold mount
5. 102 cm (40 inch) wire-harness branch
6. 89 cm (35 inch) wire-harness branch

1. Locate the 84 cm (33 inch) wire-harness branch, 60 cm (23-1/2 inch) wire-harness branch, and 66 cm (26 inch) wire-harness branch of the kit wire harness ([Figure 76](#) and [Figure 77](#)).
2. Route the 84 cm (33 inch), 60 cm (23-1/2 inch), and 66 cm (26 inch) wire-harness branches of the kit wire harness to the left side of the machine along the machine wire harness ([Figure 78](#) and [Figure 79](#)).

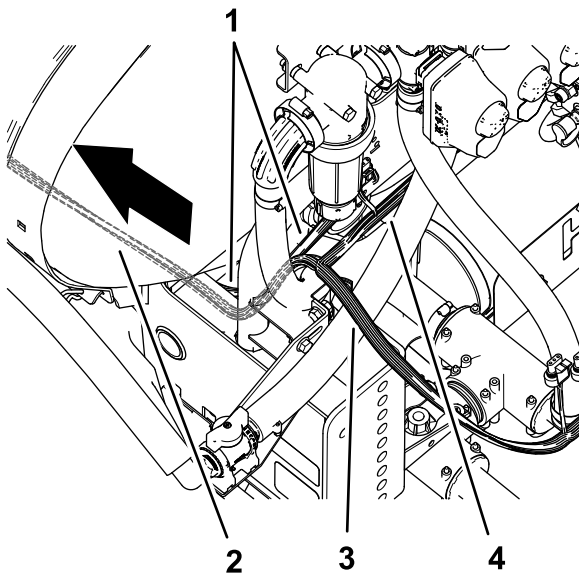


Figure 79

g199037

1. Machine wire harness
2. Kit wire harness 457 cm (180 inch)
3. 102 cm (40 inch) wire-harness branch—ASC10 and NOZZLE-VALVES 1 through 10
4. 89 cm (35 inch) wire-harness branch—RATE VALVE, MASTER VALVE, FLOW METER, LEFT SPRAY, CENTER SPRAY, and RIGHT SPRAY

3. Route the 84 cm (33 inch), 60 cm (23-1/2 inch), and 66 cm (26 inch) wire-harness branches of the kit wire harness forward along the left frame channel ([Figure 81](#) and [Figure 82](#)).

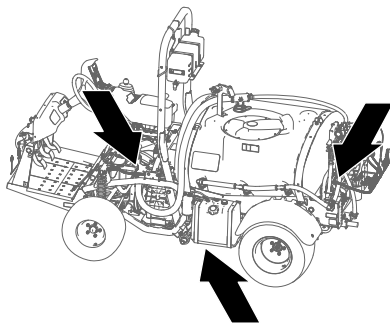


Figure 80

g199043


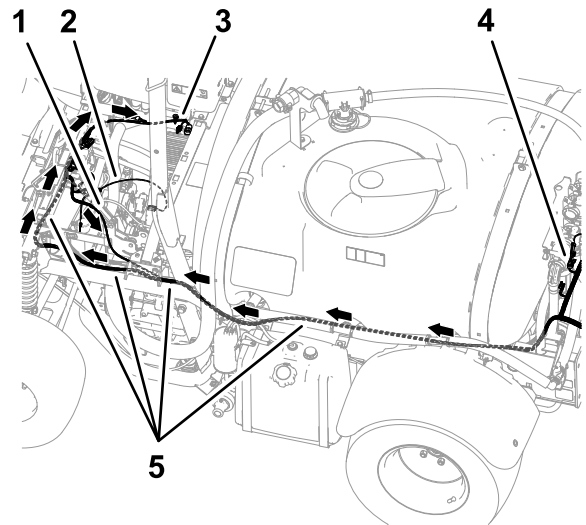


Figure 81

g199038

1. 84 cm (33 inches) wire-harness branch—pump clutch
2. 60 cm (23-1/2 inch) wire-harness branch—TO BATTERY POSITIVE, battery negative, and alternator
3. 66 cm (26 inch) wire-harness branch—ASC 10 ENABLE RELAY, 50 A FUSE, DIODE, SW'D PWR FOR GEN 2 TOPCON, and ASC 10 power and CAN from X25
4. 102 cm (40 inch) wire-harness branch—ASC10 and NOZZLE-VALVES 1 through 10
5. Kit wire harness 457 cm (180 inch)

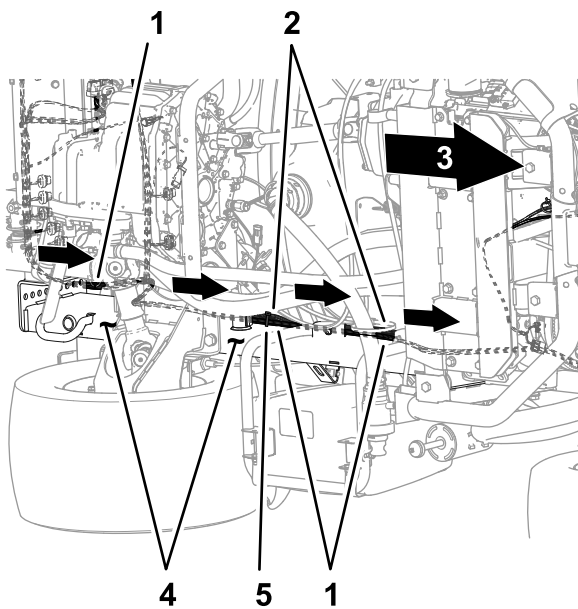


g199039

Figure 82

Bottom of the machine

- | | |
|---------------------------------------|-----------------------|
| 1. Kit wire harness 457 cm (180 inch) | 4. Left frame channel |
| 2. Machine wire harness | 5. Cable tie |
| 3. Front of the machine | |

-
4. Route the 84 cm (33 inch), 60 cm (23-1/2 inch), and 66 cm (26 inch) wire-harness branches of the kit wire harness along the machine wire harness, outboard of the parking-brake assembly ([Figure 83](#)).

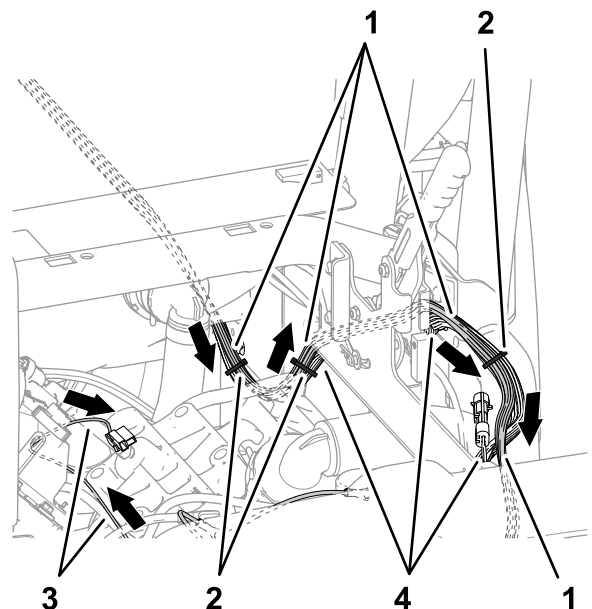

g199040

Figure 83

- | | |
|---------------------------------------|--|
| 1. Kit wire harness 457 cm (180 inch) | 3. 60 cm (23-1/2 inch) wire-harness branch—TO BATTERY POSITIVE, battery negative, and alternator |
| 2. Cable ties | 4. Machine wire harness |

-
5. Route the 84 cm (33 inch), 60 cm (23-1/2 inch), and 66 cm (26 inch) wire-harness branches of the kit wire harness across the shock-support tube as shown in [Figure 84](#).

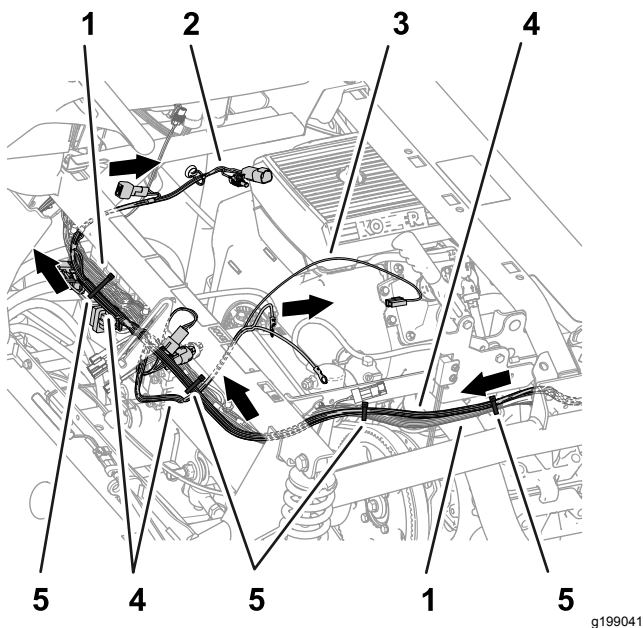


Figure 84

- | | |
|--|---------------------------------------|
| 1. Machine wire harness | 4. Kit wire harness 457 cm (180 inch) |
| 2. 66 cm (26 inch) wire-harness branch—ASC 10 ENABLE RELAY, 50 A FUSE, DIODE, SW'D PWR FOR GEN 2 TOPCON, and ASC 10 power and CAN from X25 | 5. Cable ties |
| 3. 60 cm (23-1/2 inch) wire-harness branch—TO BATTERY POSITIVE, battery negative, and alternator | |

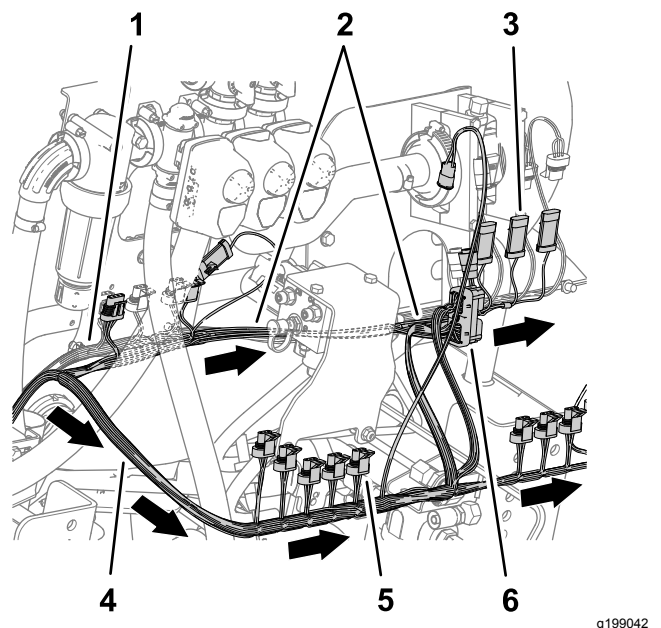


Figure 85

- | | |
|--|--|
| 1. Machine wire harness | 4. 3-socket connector (NOZZLE VALVE 5) |
| 2. 89 cm (35 inch) wire-harness branch—RATE VALVE, MASTER VALVE, FLOW METER, LEFT SPRAY, CENTER SPRAY, and RIGHT SPRAY | 5. 102 cm (40 inch) wire-harness branch—ASC10 and NOZZLE-VALVES 1 through 10 |
| 3. 3-pin connector (CENTER SPRAY) | 6. 40-socket connector (ASC 10) |

-
6. Secure the kit wire harness to the machine wire harness as shown in [Figure 82](#), [Figure 83](#), and [Figure 84](#).
 7. At the back of the machine, route the 89 cm (35 inch) wire-harness branch forward of the lift manifold, and to the right of the flow meter as shown in [Figure 85](#).

-
8. Route the 102 cm (40 inch) wire-harness branch rearward of the lift manifold, and to the right as shown in [Figure 85](#).

Connecting the Left, Center, and Right Spray-Valve Connectors

1. Connect the 3-pin connector of the 89 cm (35 inch) wire-harness branch labeled LEFT SPRAY to the 3-socket connector of the machine wire harness labeled LEFT SPRAY VALVE ([Figure 86](#)).

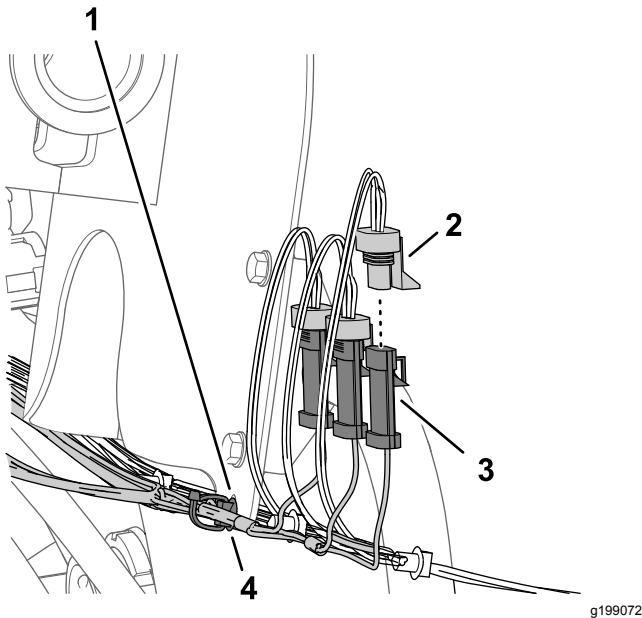


Figure 86

- | | |
|---|---|
| 1. Flow-meter bracket | 3. 3-pin connector (machine wire harness—RIGHT SPRAY VALVE) |
| 2. 3-socket connector—89 cm (35 inch) kit wire-harness branch (RIGHT SPRAY) | 4. Push-in fastener |

2. Connect the 3-pin connector kit wire harness labeled CENTER SPRAY to the 3-socket connector of the machine wire harness labeled CENTER SPRAY VALVE ([Figure 86](#)).
3. Connect the 3-pin connector of the kit wire harness labeled RIGHT SPRAY to the 3-socket connector of the machine wire harness labeled RIGHT SPRAY VALVE ([Figure 86](#)).
4. Insert the push-in fastener of the kit wire harness into the hole in the flange of the flow-meter bracket ([Figure 86](#)).

Connecting the Flow Meter, Master Section Valve, and Rate Valves Electrical Connectors

1. Connect the 3-socket electrical connector of the 89 cm (35 inch) wire-harness branch labeled FLOW METER into the 3-pin connector of the flow meter ([Figure 87](#)).

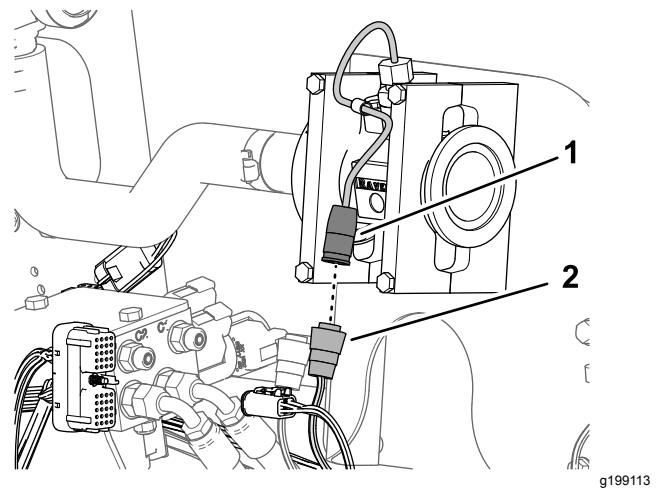


Figure 87

- | | |
|---------------------------------|---|
| 1. 3-pin connector (flow meter) | 2. 3-socket electrical connector (89 cm (35 inch) kit wire-harness branch—FLOW METER) |
|---------------------------------|---|

2. Connect the 3-pin connector of the 89 cm (35 inch) kit wire-harness branch labeled MASTER VALVE into the 3-socket connector of the machine wire harness labeled MASTER SPRAY VALVE ([Figure 88](#)).

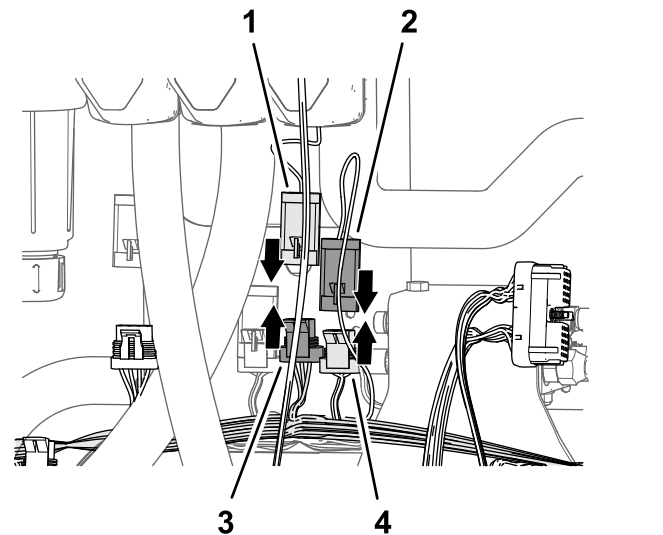


Figure 88

- | | |
|---|---|
| 1. 3-pin connector (actuator—master-spray valve) | 3. 3-pin connector (89 cm (35 inch) kit wire-harness branch—MASTER VALVE) |
| 2. 3-pin connector (89 cm (35 inch) kit wire-harness branch—MASTER VALVE) | 4. 3-socket connector (machine wire harness—MASTER SPRAY VALVE) |

3. Connect 3-pin connector of the actuator for the master-spray valve into the 3-socket connector of the 89 cm (35 inch) kit wire-harness branch labeled MASTER VALVE ([Figure 88](#)).

- Connect the 4-pin connector of the actuator for the rate valve into the 4-socket connector of the 89 cm (35 inch) kit wire-harness branch labeled RATE VALVE ([Figure 89](#)).


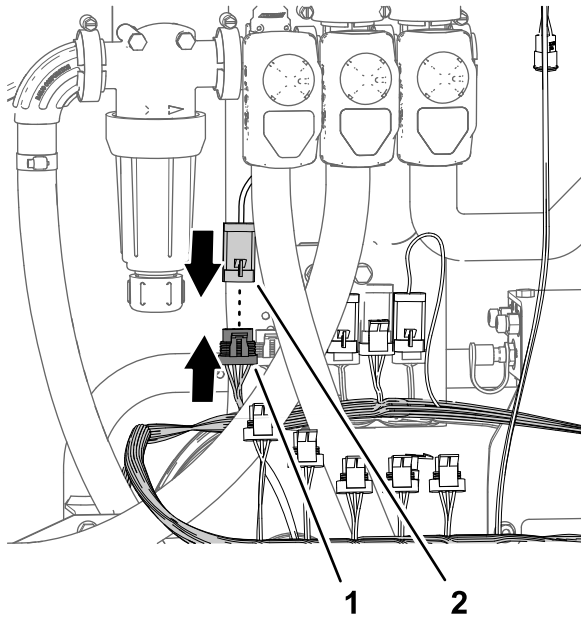


Figure 89

- 4-socket connector ((89 cm (35 inch) kit wire-harness branch—RATE VALVE)
- 4-pin connector(actuator—rate valve)

g199114

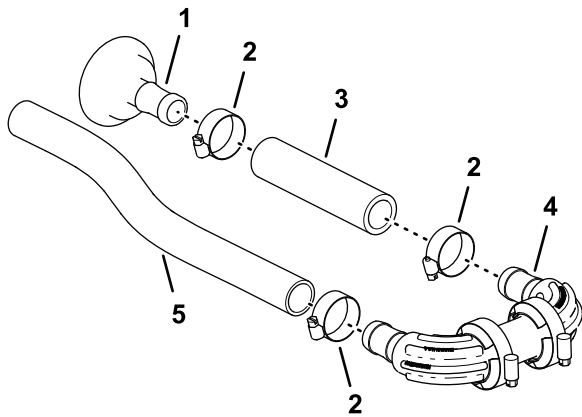


g281439

Figure 90

- Straight hose barb (1 x 2 inches)
 - Hose clamp (3/4 to 1-1/2 inches)
 - Hose (1 x 5-3/4 inches)
 - Manifold
 - Hose (1 x 16 inches)
- Assemble the other end of the hose (1 x 5-3/4 inches) onto the barbed fitting of the manifold with a hose clamp as shown in [Figure 90](#), and tighten the hose clamp by hand.
 - Assemble the hose (1 x 16 inches) onto the other barbed fitting of the manifold with a hose clamp, and tighten the clamp by hand ([Figure 90](#)).

Assembling the Manifold to the Flow Meter

- Assemble the straight hose barb (1 x 2 inches) to the flange of the flow meter with the gasket 38 mm (1-1/2 inches) and flange clamp 51 mm (2 inches) that you removed in step 6 of [Removing the Section Valves from the Manifold Mount](#) (page 34).

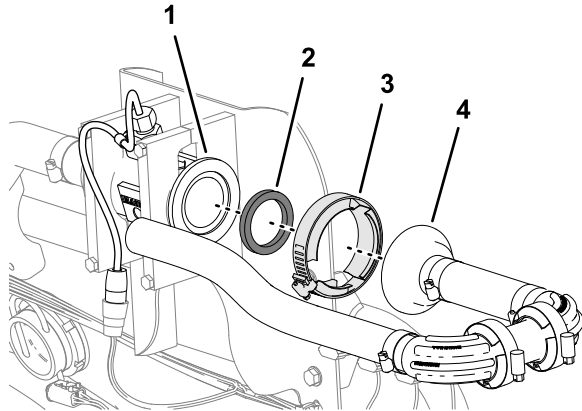

g281440

Figure 91

- Flange (flow meter)
- Gasket 38 mm (1-1/2 inches)
- Flange clamp 51 mm (2 inches)
- Straight hose barb (1 x 2 inches)

16

Assembling the Flow-Meter Manifold

Parts needed for this procedure:

1	Straight hose barb (1 x 2 inches)
3	Hose clamp (3/4 to 1-1/2 inches)
1	Hose (1 x 5-3/4 inches)
1	Manifold
1	Hose (1 x 16 inches)

Assembling the Manifold

- Assemble hose (1 x 5-3/4 inches) on to the straight hose barb (1 x 2 inches) with a hose clamp (3/4 to 1-1/2 inches), and tighten the clamp by hand ([Figure 90](#)).

2. Tighten the flange clamp by hand ([Figure 91](#)).

17

Installing the Bypass Hoses to the Tank

Parts needed for this procedure:

1	Bypass hose assembly
1	Shutoff valve

Assembling the Shutoff Valve to the Bypass Hose

Machines with the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

1. As shown in [Figure 92](#), remove the retainer from the 90° quick-connect fitting.

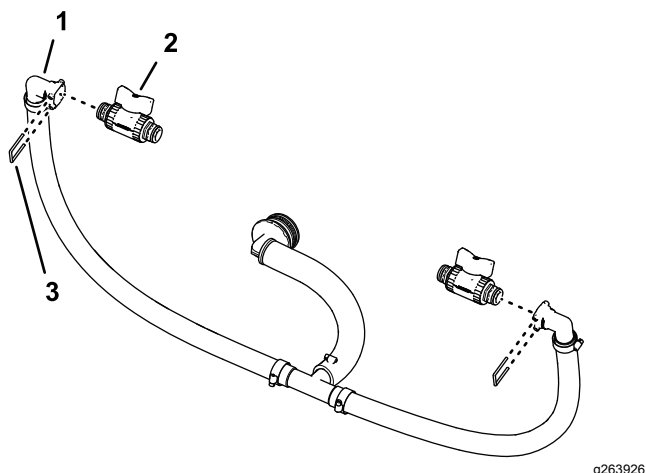


Figure 92

1. Quick-disconnect coupling (90° barbed fitting)
2. Shutoff valve
3. Retainer

2. Assemble the shutoff valve into the quick-disconnect fitting socket ([Figure 92](#)).
3. Secure the valve to the fitting with the retainer that you removed in step 1.
4. Assemble the shutoff valve and retainer that you removed in step 1 of [Removing the Section Bypass Hose \(page 32\)](#) to the other quick-disconnect fitting socket ([Figure 92](#)).

Assembling the Bypass Hoses to the Tank

1. Align the bypass hose assembly to the sprayer tank ([Figure 93](#)).

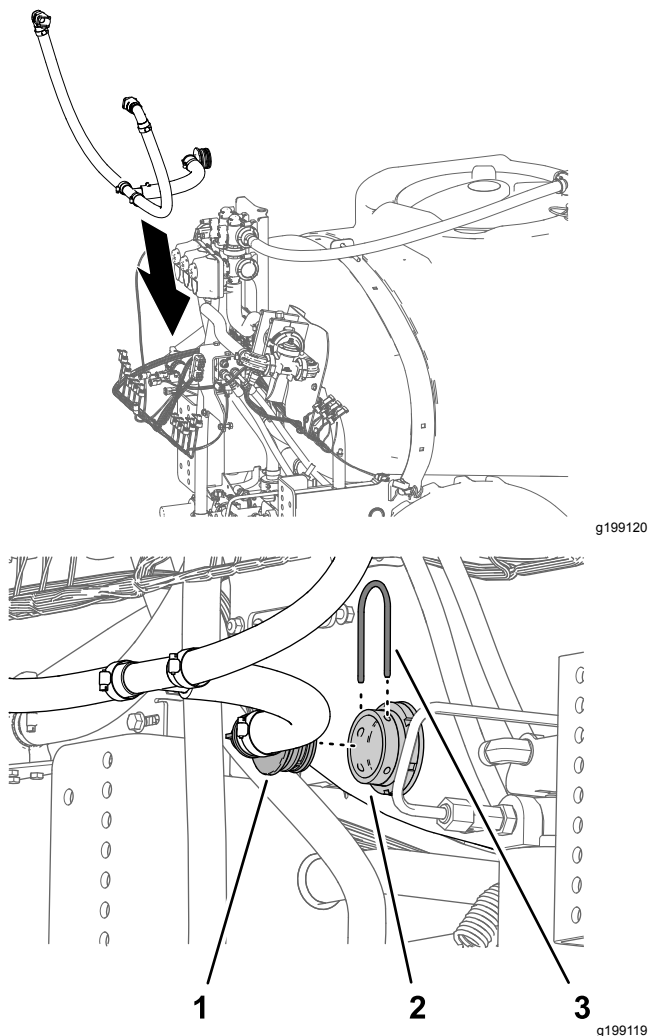


Figure 93

1. 90° barbed fitting (bypass hose assembly)
 2. Bulkhead fitting (sprayer tank)
 3. Retainer
2. Assemble the 90° barbed fitting to the bulkhead fitting of the sprayer tank and secure the fittings with the retainer that you removed in step 2 of [Removing the Section Bypass Hose \(page 32\)](#).

18

Installing the Modified Center-Spray Section

No Parts Required

Procedure

Lifting-equipment capacity: 55 kg (120 lb)

1. Using lifting equipment with the specified lift capacity, raise the center-spray section and align the holes in the support bracket for the spray section ([Figure 94](#)) with the holes in the mounting plate for the frame of the machine that you identified in [step 3 of Removing the Center-Spray Section \(page 26\)](#).

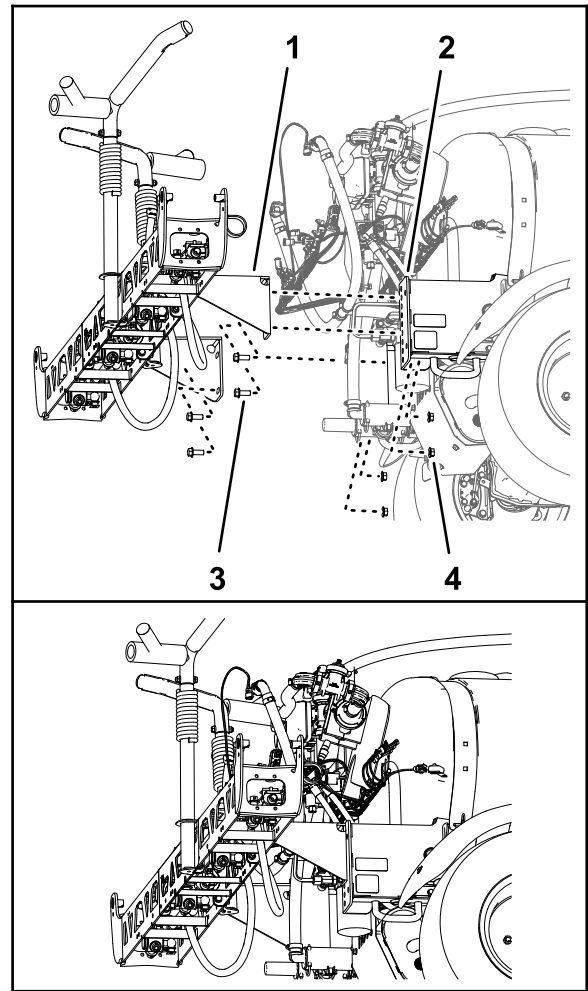


Figure 94

g199121

- | | |
|---|--|
| 1. Support bracket (center-spray section—10-sprayer-valve system) | 3. Mounting channel (frame of the machine) |
| 2. Flange-head bolt (1/2 x 1-1/4 inches) | 4. Flange locknut (1/2 inch) |
-
2. Assemble the center-spray section to the mounting channels ([Figure 94](#)) with the 4 flange-head bolt (1/2 x 1-1/4 inches) and 4 flange locknut (1/2 inch) that you removed in [step 4 in Removing the Center-Spray Section \(page 26\)](#).
 3. Torque the nuts and bolts to 91 to 113 N·m (67 to 83 ft-lb).

19

Assembling the Lift Cylinder Manifold to the Cylinder Mount

No Parts Required

Procedure

1. Untie the lift manifold from the valve-mount bracket.
2. Assemble the section lift manifold to the cylinder mount as follows:
 - **For machines without the optional ultra sonic boom leveling kit:**
 - A. Align the holes in the support bracket for the section-lift manifold with the holes in the cylinder mount ([Figure 95](#)).

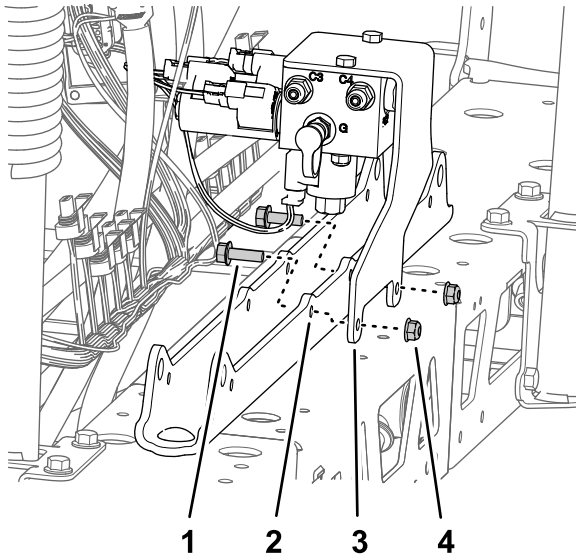


Figure 95

- | | |
|-------------------------------------|--|
| 1. Flange-head bolt (5/16 x 1 inch) | 3. Support bracket (section-lift manifold) |
| 2. Cylinder mount | 4. Flange locknut (5/16 inch) |

g199754

- A. Align the holes in the support bracket for the section-lift manifold and the TEC controller bracket with the holes in the cylinder mount.

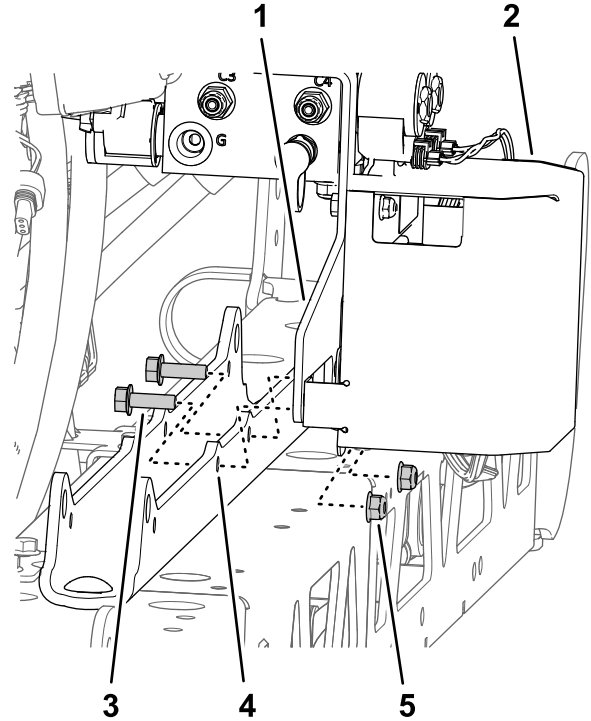


Figure 96

g199820

- | | |
|--|-------------------------------|
| 1. Support bracket (section-lift manifold) | 4. Cylinder mount |
| 2. TEC controller bracket | 5. Flange locknut (5/16 inch) |
| 3. Flange-head bolt (5/16 x 1 inch) | |

- B. Assemble the support bracket and TEC bracket to the cylinder mount ([Figure 96](#)) with the 2 flange-head bolt (5/16 x 1 inch) and flange locknut (5/16 inch) that you removed in step 1 of [Removing the Section-Lift Manifold from the Center-Spray Section](#) (page 25).
3. Torque the bolts and nuts to 1978 to 2542 N·cm (175 to 225 in-lb).

- B. Assemble the support bracket to the cylinder mount ([Figure 95](#)) with the 2 flange-head bolt (5/16 x 1 inch) and flange locknut (5/16 inch) that you removed in step 1 of [Removing the Section-Lift Manifold from the Center-Spray Section](#) (page 25).

- **For machines with the optional ultra sonic boom leveling kit:**

20

Installing the Valve Mount and Sprayer Valves

Parts needed for this procedure:

1	Valve mount and sprayer-valve assembly
3	Bolt (4 x 10 mm)
1	ASC 10 sprayer controller
3	Flange locknut (4 mm)
2	Cap (quick-disconnect fitting)
8	Flange-head bolts (5/16 x 3/4 inch)
8	Flange locknuts (5/16 inch)
1	Hose clamp
1	Push-in fastener (cable tie)
3	Push-in fastener (connector anchor)

Assembling the Sprayer Controller to the Valve Mount

1. Align the ASC 10 sprayer controller to the forward side of the valve mount with the 4-pin connector outward ([Figure 97](#)).

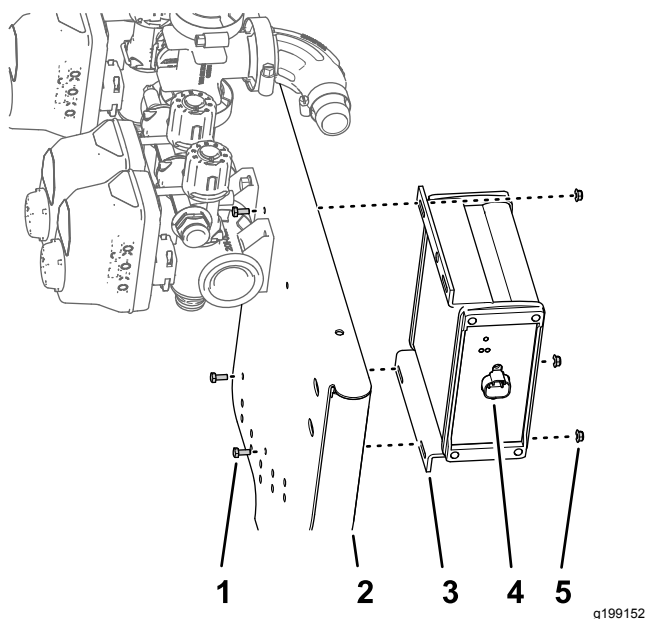


Figure 97

1. Bolt (4 x 10 mm)
2. 10-valve mount
3. ASC 10 sprayer controller
4. 4-pin connector
5. Flange locknut (4 mm)

2. Assemble the sprayer controller to the valve mount ([Figure 97](#)) with the 3 bolts (4 x 10 mm) and 3 flange locknuts (4 mm).

Note: Do not use the upper outboard hole in the ASC 10 sprayer controller.

3. Torque the bolts and nuts to 234 to 286 N·cm (21 to 25 to in-lb).

Positioning the Bypass Valves—Machines with the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

1. Remove the retainers that secure the valve actuators for nozzle valves 1 through 7 ([Figure 98](#)).

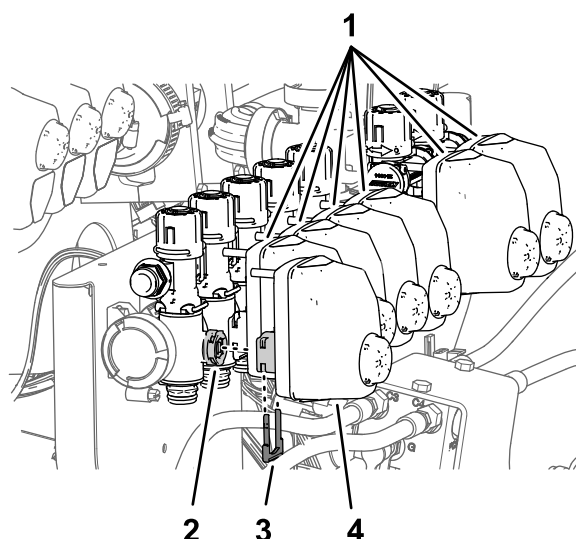


Figure 98

1. Valve actuators (nozzle valves 2 through 7)
2. Valve stem (nozzle valve 1)
3. Retainer
4. Valve actuator (nozzle valves 1)

2. Remove the valve actuators from nozzle valves 1 through 7 ([Figure 98](#)).
3. Remove the retainers that secures the plugs in the sockets of the quick disconnect fitting at the nozzle valve 5 and nozzle valve 6, and remove the plugs ([Figure 99](#)).

Note: You no longer need the plugs; retain the retainers for installation in [Installing the Section Bypass Hoses—Machines with the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit](#) (page 51).

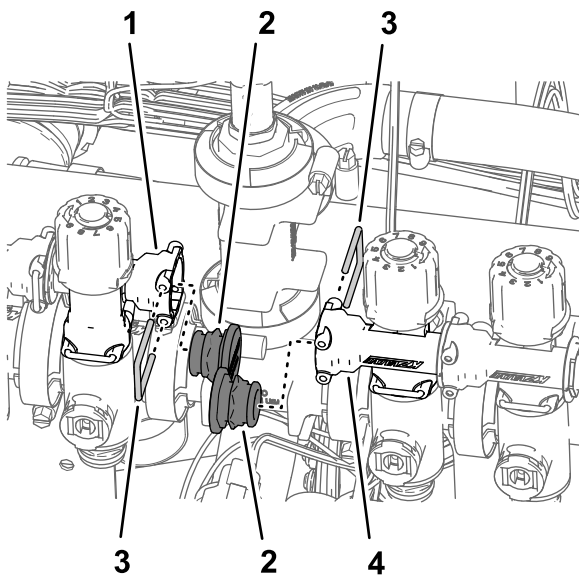


Figure 99

- | | |
|---|---|
| 1. Quick-disconnect fitting—socket (bypass valve of nozzle-valve 5) | 3. Retainer |
| 2. Cap (quick-disconnect fitting) | 4. Quick-disconnect fitting—socket (bypass valve of nozzle-valve 6) |

4. Remove the retainers that secure the bypass valves to nozzle valves 1 through 7 (**Figure 100**).

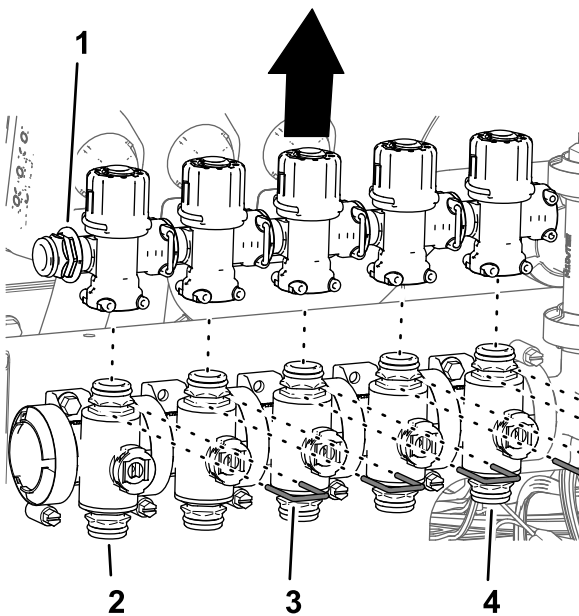


Figure 100

- | | |
|----------------------------------|-------------------|
| 1. Quick-disconnect fitting—plug | 3. Retainer |
| 2. Nozzle valve 1 | 4. Nozzle valve 5 |

5. Lift the bypass valves from the nozzle valves 1 through 5 (**Figure 100**).

6. Rotate the bypass valves 180° and assemble them onto the quick disconnect fittings of the section valves (**Figure 101**).

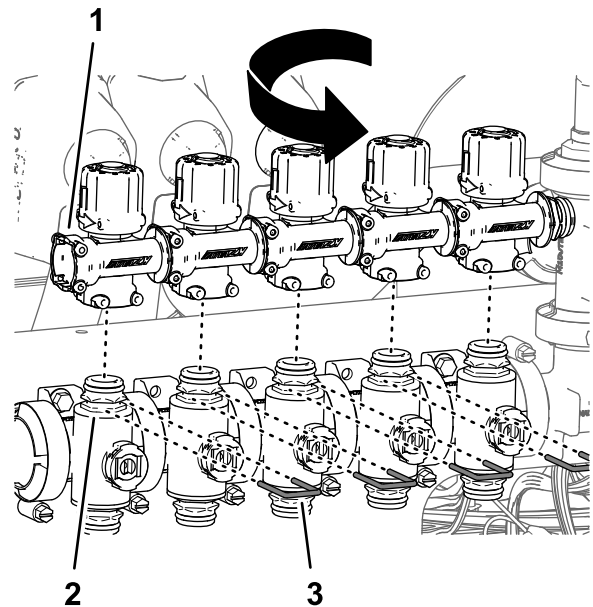


Figure 101

- | | |
|--|-------------|
| 1. Quick-disconnect fitting—socket (align outward) | 3. Retainer |
| 2. Nozzle valve 1 | |

7. Secure the bypass valves to the section valves with the retainers (**Figure 101**) that you removed in step 4.
8. Repeat steps 5 through 7 for the bypass valves of nozzle valve 6 and nozzle valve 7 (**Figure 102**).

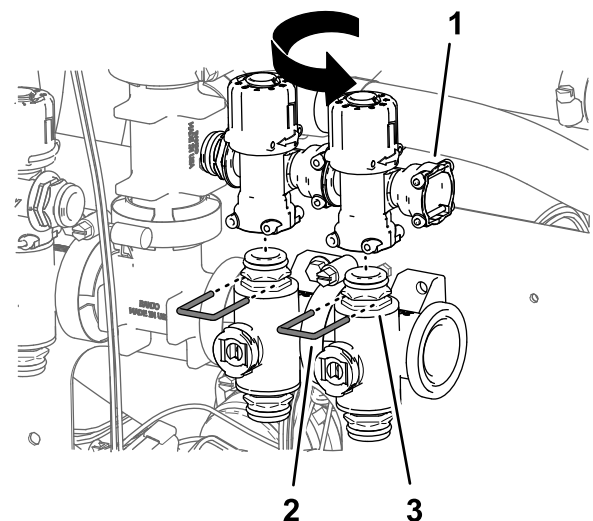


Figure 102

- | | |
|--|-------------------|
| 1. Quick-disconnect fitting—socket (align outward) | 3. Nozzle valve 7 |
| 2. Retainer | |

9. Assemble the caps onto the quick disconnect fittings of the bypass valves for nozzle-valve 5 and nozzle-valve 6 with the retainers provided with the caps ([Figure 101](#)).

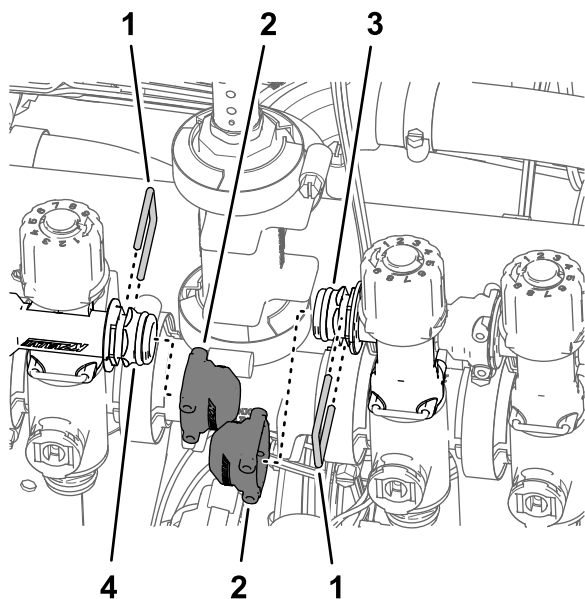


Figure 103

- | | |
|-----------------------------------|---|
| 1. Retainer | 3. Quick-disconnect fitting—plug (bypass valve of nozzle-valve 5) |
| 2. Cap (quick-disconnect fitting) | 4. Quick-disconnect fitting—plug (bypass valve of nozzle-valve 6) |

10. Assemble the valve actuators onto the nozzle valves 1 through 7 ([Figure 98](#)) with the retainers that you removed in step 1.

Assembling the 3 Section Valves to the Valve Mount

1. Assemble the 3 section valves ([Figure 104](#)) that you removed in step 8 of [Removing the Section Valves from the Manifold Mount](#) (page 34) onto the flange of valve 7 of the sprayer valve assembly with the flange clamp and gasket that you removed in step 4 of [Removing the Section Valves from the Manifold Mount](#) (page 34).

Important: The left, center, and right section valves are identified in the GeoLink sprayer system as follows: left section valve—nozzle valve 8, center section valve—nozzle valve 9, and right section valve—nozzle valve 10.

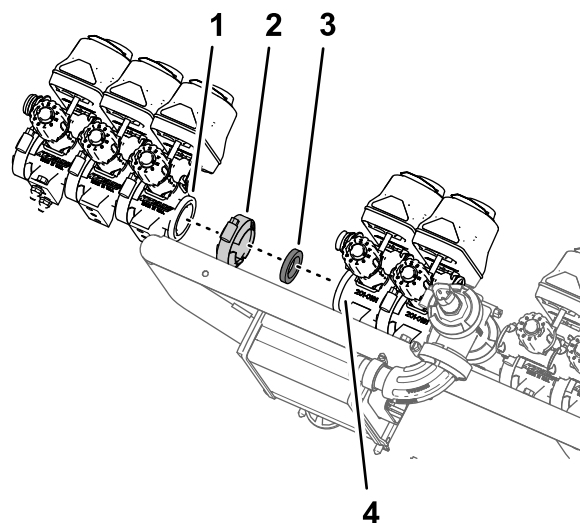


Figure 104

- | | |
|---|---|
| 1. Flange—section valve (left sprayer section—nozzle valve 8) | 3. Gasket |
| 2. Flange clamp | 4. Flange—nozzle valve 7 (GeoLink sprayer valve assembly) |

2. Secure the socket of the quick-disconnect coupling for bypass valve of nozzle valve 8 to the quick-disconnect coupling for bypass valve of nozzle valve 7 with the retainer that you removed in step 8 of [Removing the Section Valves from the Manifold Mount](#) (page 34).


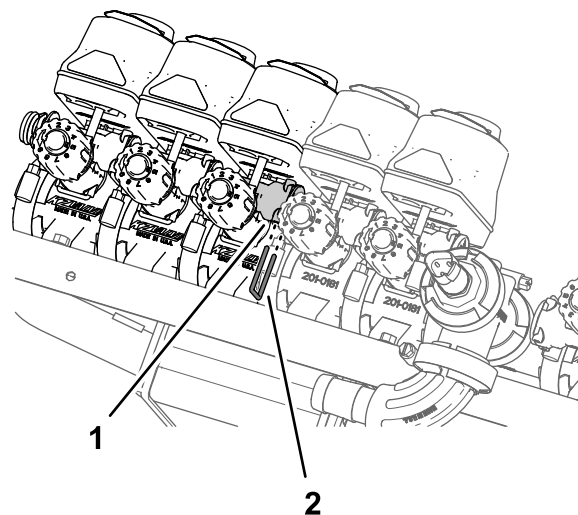


Figure 105

- | | |
|--|-------------|
| 1. Quick-disconnect coupling (socket—bypass valve) | 2. Retainer |
|--|-------------|

3. Assemble nozzle valve 10 to the valve mount ([Figure 106](#) or [Figure 107](#)) with the 2 flange-head bolt (1/4 x 3/4 inch) and 2 locknut (1/4 inch) that you removed in step 2 of [Removing the Section Valves from the Manifold Mount](#) (page 34).

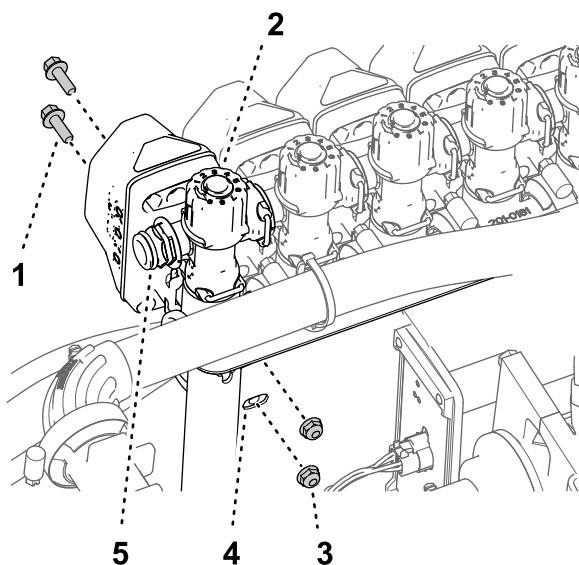


g201492

Figure 106

Machines without the Hand Spray Wand Kit or the Electric Hose Reel Kit

- | | |
|--------------------------------------|------------------------------------|
| 1. Flange-head bolt (1/4 x 3/4 inch) | 4. Valve mount |
| 2. Nozzle valve 10 | 5. Quick-disconnect fitting (plug) |
| 3. Locknut (1/4 inch) | |

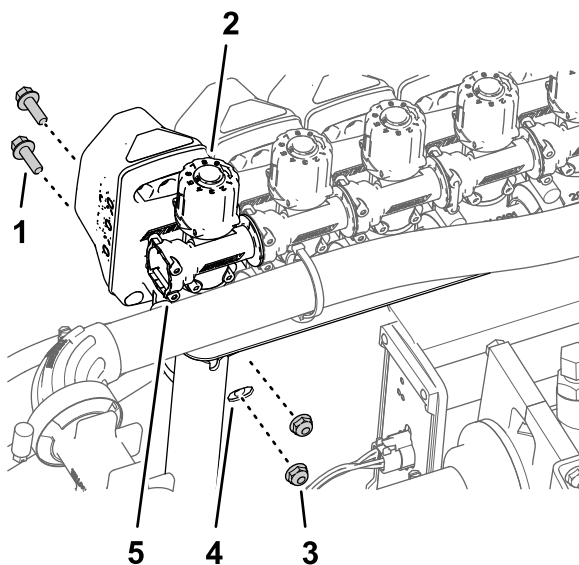

g201569

Figure 107

Machines with the Hand Spray Wand Kit or the Electric Hose Reel Kit


- | | |
|--------------------------------------|--------------------------------------|
| 1. Flange-head bolt (1/4 x 3/4 inch) | 4. Valve mount |
| 2. Nozzle valve 10 | 5. Quick-disconnect fitting (socket) |
| 3. Locknut (1/4 inch) | |

4. Torque the flange-head bolts and locknuts to 1017 to 1243 N·m (90 to 120 in-lb).

Assembling the Valve Mount and Sprayer Valve Assembly to the Machine

Lifting-equipment capacity: 23 kg (50 lb)

- Using lifting equipment with the specified capacity, lift the valve mount and sprayer valve assembly and align it over the center-sprayer section ([Figure 108](#)).

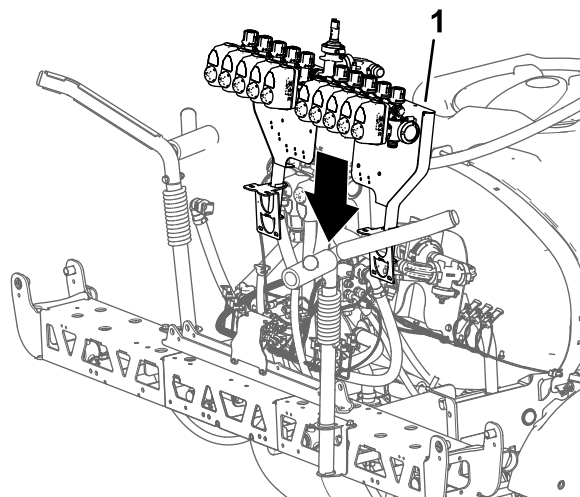


g199385

Figure 108

- Valve mount and sprayer-valve assembly

- Align the holes on the mount bracket of the valve mount to the holes on the truss frame of the center sprayer section ([Figure 109](#)).

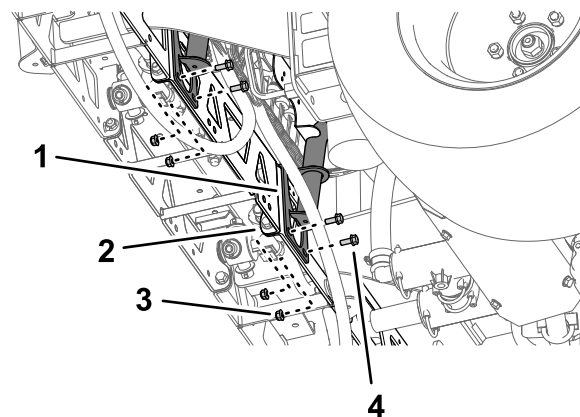


g199540

Figure 109

- | | |
|---|---------------------------------------|
| 1. Bracket (valve mount) | 3. Flange locknut (5/16 inch) |
| 2. Truss frame (center sprayer section) | 4. Flange head bolt (5/16 x 3/4 inch) |

- Assemble the valve mount to the truss frame ([Figure 109](#) and [Figure 110](#)) with 4 bolts (5/16 x 3/4 inch) and 4 flange locknuts (5/16 inch).

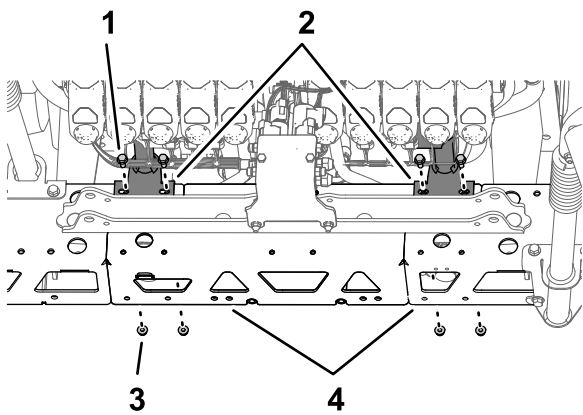


g199541

Figure 110

- | | |
|---------------------------------------|---|
| 1. Flange head bolt (5/16 x 3/4 inch) | 3. Flange locknut (5/16 inch) |
| 2. Bracket (valve mount) | 4. Truss frame (center sprayer section) |
-
- Repeat steps 2 through 3 for the other mount bracket of the valve mount at the other truss frame.
 - Torque the flange-head bolts and flange locknuts to 1978 to 2542 N·cm (175 to 225 in-lb).

Assembling the Hose to the Sprayer Valve Manifold

- Assemble the hose (1 x 16 inches) over the 90° flange fitting (1 inch) as shown in [Figure 111](#).

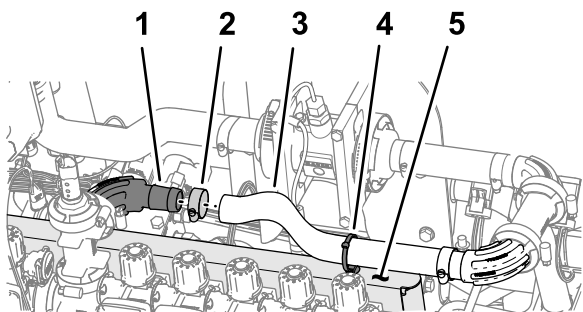


g281672

Figure 111

- | | |
|--------------------------------|---------------------------------|
| 1. 90° flange fitting (1 inch) | 4. Push-in fastener (cable tie) |
| 2. Hose clamp | 5. Valve mount |
-
- Secure the hose to the flange fitting with a hose clamp ([Figure 111](#)).
 - Assemble the cable tie/push-in fastener into the hole at the top of the valve mount as shown in [Figure 111](#).
 - Secure the cable tie/push-in fastener ([Figure 111](#)) around the hose (1 x 16 inches).

Installing the Section Bypass Hoses—Machines without the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

- Remove the retainers from the sockets of the quick-connect fittings.
- Assemble the quick-connect fitting of the bypass hose to the quick disconnect fitting at the bypass valve at nozzle valve 10 ([Figure 112](#)).

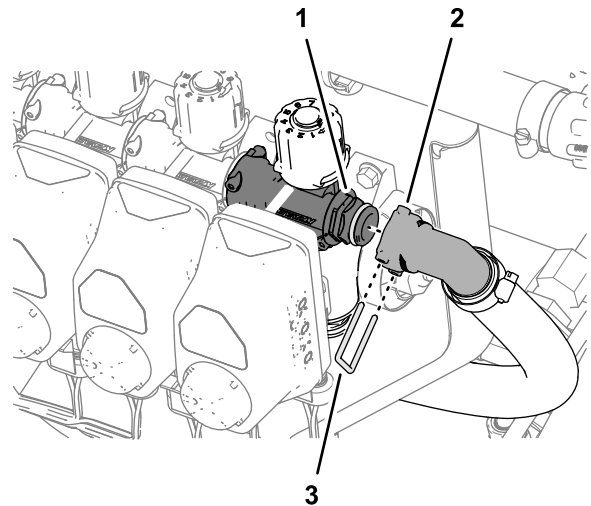

g281441

Figure 112

- | | |
|--|-------------|
| 1. Quick disconnect fitting (bypass valve) | 3. Retainer |
| 2. Socket—quick-connect fitting | |
-
- Secure the quick disconnect fittings for the bypass hose and the bypass valve with the retainer ([Figure 112](#)).
 - Repeat steps 1 through 3 for the quick disconnect fittings at nozzle valve 1.

Installing the Section Bypass Hoses—Machines with the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

- Assemble the quick-disconnect fitting of the bypass-shutoff valve with the quick disconnect fitting (socket) of the bypass valve ([Figure 113](#)).

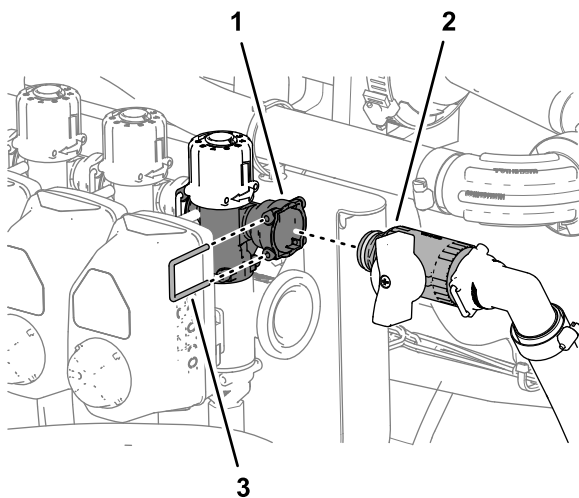


Figure 113

g281442

1. Quick-connect fitting—socket (nozzle valve 10)
 2. Shutoff valve (hand wand or electric hose reel kit)
 3. Retainer
-
2. Secure the quick disconnect fittings for the bypass-shutoff valve and the bypass valve with the retainer (Figure 113) that you removed in step 3 of [Positioning the Bypass Valves—Machines without the Optional Hand Spray Wand Kit or the Optional Electric Hose Reel Kit](#) (page 33).
 3. Repeat steps 1 and 2 for the bypass-shutoff valve and the bypass valve at the other side of the machine.

Installing the Nozzle Valve Electrical Connectors

1. Assemble the connector anchor push-in fasteners onto the holes in the valve mount (Figure 114).

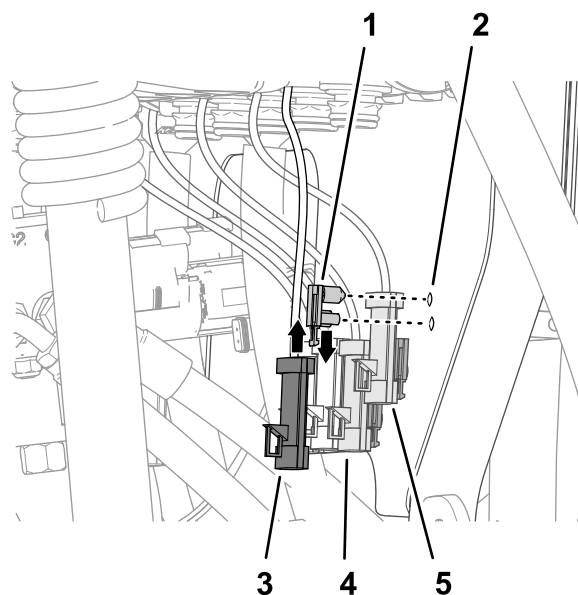


Figure 114

g199981

1. Push-in fastener (connector anchor)
2. Valve mount
3. 3-pin connector (valve actuator—position 10)
4. 3-pin connector (valve actuator—position 8)
5. 3-pin connector (valve actuator—position 9)

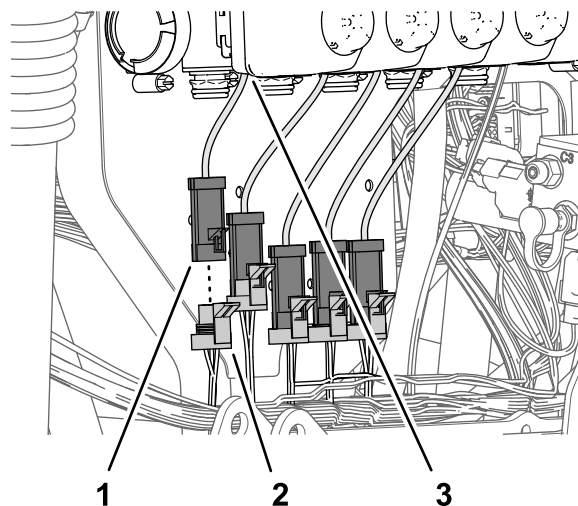


Figure 115

g199980


1. 3-pin connector (valve actuator—position 1)
2. 3-socket connector—89 cm (35 inch) kit wire-harness branch (NOZZLE VALVE 1)
3. Valve actuator (position 1)

2. Connect 3-socket connector (Figure 115) of the 89 cm (35 inch) kit wire-harness branch labeled NOZZLE VALVE 1) into the 3-pin connector of the left most valve actuator (position 1).

Note: The valve actuator positions 1 through 10 are arranged from left to right when standing behind the machine.

3. Connect 3-socket connector (Figure 115) of the 89 cm (35 inch) kit wire-harness branch labeled NOZZLE VALVE 2) into the 3-pin connector of the valve actuator (position 2).
4. Connect the remaining 3-socket connectors of the 89 cm (35 inch) kit wire-harness branch into the 3-pin connector of the valve actuators (Figure 115).

Note: Ensure that the 3-socket connector are connected to the related valve actuator position.

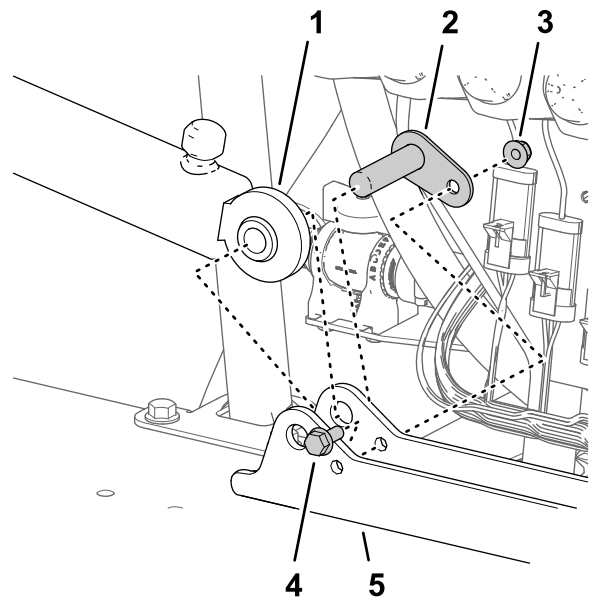

g200002

Figure 116

- | | |
|-------------------------------|---------------------------------------|
| 1. Lift cylinder (fixed end) | 4. Flange-head bolt (5/16 x 3/4 inch) |
| 2. Pivot pin | 5. Cylinder mount |
| 3. Flange locknut (5/16 inch) | |

2. Assemble the cylinder to the cylinder mount with the pivot pin, flanged-head bolt, and flange nut (Figure 116).
3. Torque the bolt and nut to 1978 to 2542 N·cm (175 to 225 in-lb).
4. Repeat steps 1 through 3 for the other lift cylinder at the other side of the cylinder mount.

21

Assembling the Boom-Lift Cylinders

Parts needed for this procedure:

4	Hydraulic hose (1/4 x 24-3/4 inches)
---	--------------------------------------

Assembling the Lift Cylinders

1. Align the fixed end of the lift cylinder that you removed in step 3 of [Removing the Lift Cylinders \(page 23\)](#) to the 16 mm (5/8 inch) hole in the cylinder mount (Figure 116).

Note: Ensure that the extend and retract ports of the cylinder align up.

Installing the Lift-Cylinder Hoses

1. Loosely assemble a new hydraulic hose (1/4 x 24-3/4 inches) between the extend port of the left boom-lift cylinder and port C3 of the boom-lift manifold ([Figure 117](#)).


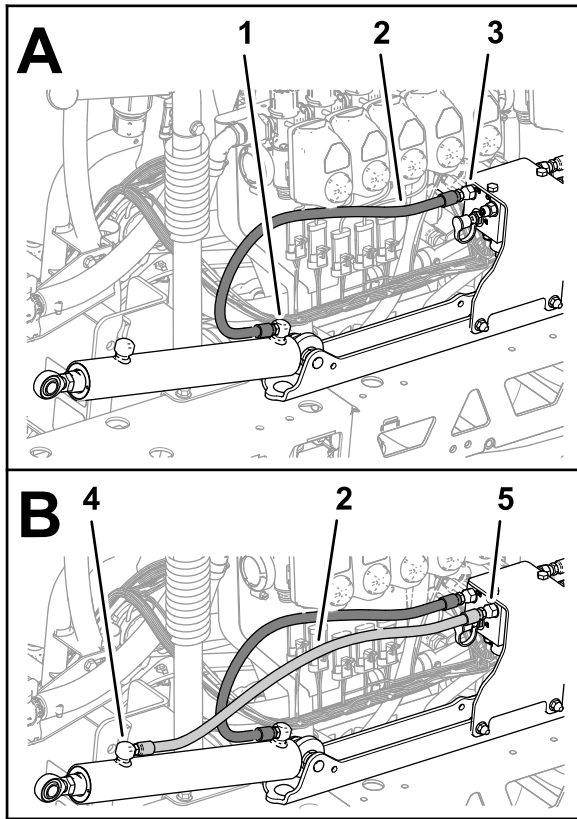


Figure 117

g200075

1. Extend port (left boom-lift cylinder)
 2. Hydraulic hose (1/4 x 24-3/4 inches)
 3. Port C3 (boom-lift manifold)
 4. Retract port (left boom-lift cylinder)
 5. Port C4 (boom-lift manifold)
2. Loosely assemble a new hydraulic hose (1/4 x 24-3/4 inches) between the retract port of the left boom-lift cylinder and port C4 of the boom-lift manifold ([Figure 117](#)).
 3. Loosely assemble a new hydraulic hose (1/4 x 24-3/4 inches) between the extend port of the right boom-lift cylinder and port C1 of the boom-lift manifold ([Figure 118](#)).

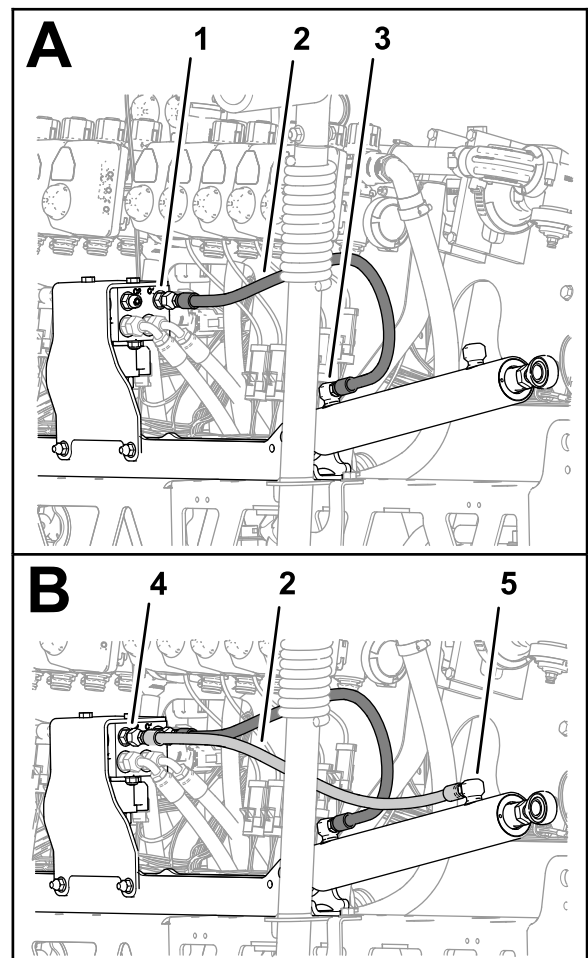

g200076

Figure 118

1. Port C1 (boom-lift manifold)
 2. Hydraulic hose (1/4 x 24-3/4 inches)
 3. Extend port (right boom-lift cylinder)
 4. Port C2 (boom-lift manifold)
 5. Retract port (right boom-lift cylinder)
4. Loosely assemble a new hydraulic hose (1/4 x 24-3/4 inches) between the retract port of the right boom-lift cylinder and port C2 of the boom-lift manifold ([Figure 118](#)).
 5. Torque the hose fittings at the extend and retract ports of the lift cylinders ([Figure 117](#) and [Figure 118](#)) to 21 to 26 N·m (15 to 19 ft-lb).
 6. Torque the swivel nuts of the hoses at the boom-lift manifold ([Figure 117](#) and [Figure 118](#)) to 24 to 30 N·m (17 to 22 ft-lb).

Installing the Outer-Spray Sections

Parts needed for this procedure:

4	Nylon-flange bushing
1	Cable tie
1	Supply-hose assembly 188 cm (74 inches)
1	Supply-hose assembly 234 cm (92 inches)
1	Supply-hose assembly 279 cm (110 inches)

Removing the Sprayer Nozzles from the Outer-Spray Sections

1. Cut the hose between 2 sprayer nozzles (Figure 119).

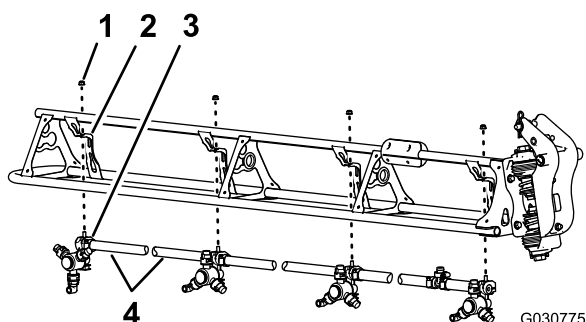


Figure 119

1. Flange locknut (5/16 inch)
2. Nozzle support
3. Sprayer nozzle
4. Hose (3/4 inch inside diameter)

2. Remove the flange locknut (5/16 inch) that secures the sprayer nozzle to the nozzle support (Figure 119).
3. Repeat steps 2 and 1 for the other 3 nozzles.

Note: Retain the flange locknut and sprayer nozzle for installation in [Installing the Sprayer Nozzles at the Outer-Spray Sections](#) (page 61).

Note: Discard the hoses, clamps, and T-fitting that you removed from the machine.

4. Repeat steps 2 through 3 at the other outer-spray section.
5. Working with the 8 sprayer nozzles that you removed in step 1, remove the stainless steel

screws (#12 x 1-1/4 inches) that secures the upper clamp halves and the double or single barbed-hose shanks (3/4 inch) to the body of each of the sprayer nozzle, and remove the barbed-hose shanks (Figure 120).

Note: The hex-head bolt (5/16 x 3/4 inch—stainless steel) will separate from the upper clamp half when you open the clamp, retain the bolt for installation.

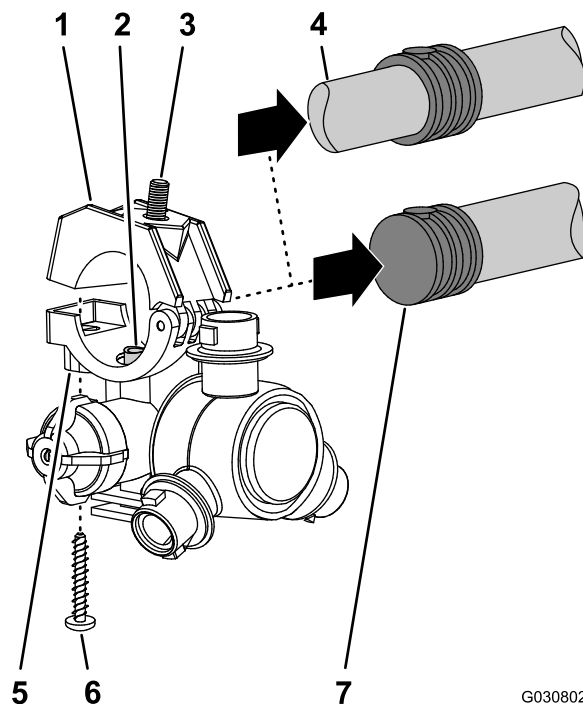


Figure 120

1. Upper clamp half
2. Transfer tube
3. Hex-head bolt (5/16 x 3/4 inch—stainless steel)
4. Double barbed-hose shank (3/4 inch hose)
5. Sprayer-nozzle body
6. Stainless steel screw (#12 x 1-1/4 inches)
7. Single barbed-hose shank (3/4 inch hose)

Assembling the Outer-Spray Sections to the Machine

Lift equipment capacity: 91 kg (200 lb)

1. Using lift equipment with the specified capacity, raise the outer boom.
2. Insert a nylon-flange bushing into the 31.8 mm (1-1/4 inches) hole at each side of the pivot fitting (Figure 121).

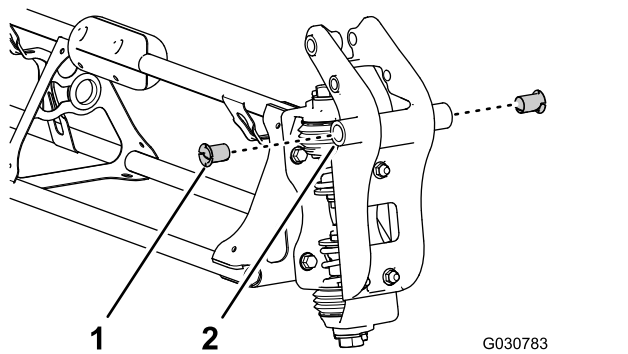


Figure 121

1. Nylon-flange bushing
2. Pivot fitting (outer-spray section)

3. Align the bushings in the pivot fitting with the holes in the flanges of the pivot bracket at the end of the center-spray section ([Figure 122](#)).

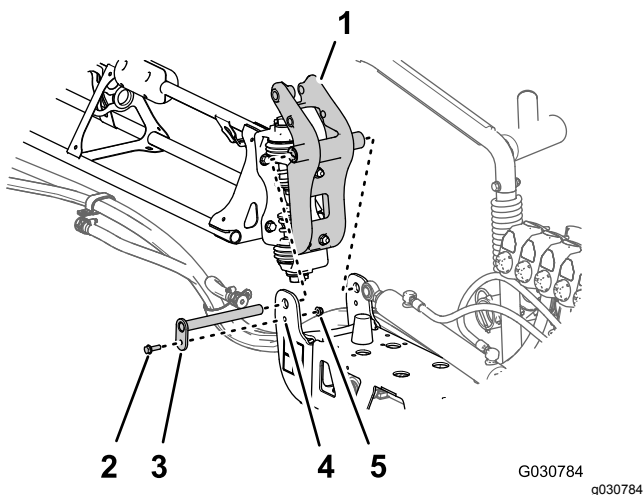


Figure 122

1. Pivot fitting (outer-spray section)
2. Flange bolt (5/16 x 1 inch)
3. Pivot pin
4. Pivot bracket (center-spray section)
5. Flange locknut (5/16 inch)

4. Assemble the pivot fitting to the pivot bracket with the pivot pin, flange bolt (5/16 x 1 inch), and flange locknut (5/16 inch) that you removed in step 2 of [Removing the Outer-Spray Sections](#) ([page 24](#)).
5. Torque the bolt and nut to 1978 to 2542 N·cm (175 to 225 in·lb).
6. Align the rod end of the lift cylinder with the hole 25 mm (1 inch) in the horn of the pivot fitting ([Figure 123](#)).

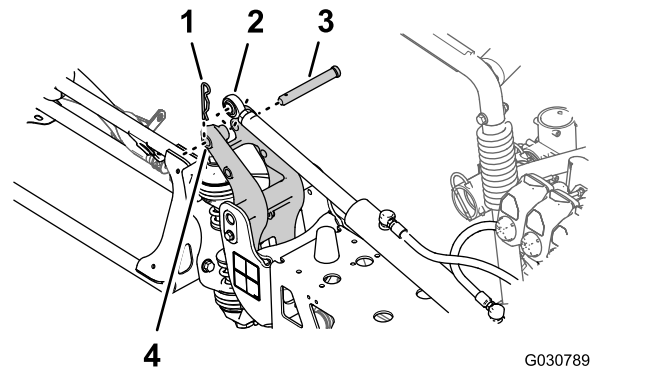


Figure 123

1. Hairpin
2. Rod end (lift cylinder)
3. Clevis pin
4. 25 mm (1 inch) hole—horn of the pivot-fitting

7. Secure the lift cylinder to the pivot fitting with the clevis pin and hairpin ([Figure 123](#)) that you removed in step 2 of [Removing the Lift Cylinders](#) ([page 23](#)).
8. Repeat steps 1 through 7 at the outer-spray section at the other side of the machine.

Installing the Sprayer-Nozzle Hoses

Parts needed for this procedure:

2	Supply-hose 279 cm (110 inches)
2	Supply-hose 234 cm (92 inches)
4	Supply-hose 188 cm (74 inches)
2	Supply-hose 81 cm (32 inches)


Identifying the Sprayer-Nozzle Hose Positions

Identify the supply hoses by length ([Figure 124](#)) for each of the sprayer-nozzle position as follows:

Sprayer nozzle hose-position table

Sprayer-nozzle positions—left-spray section	Sprayer-nozzle positions—center-spray section	Sprayer-nozzle positions—right-spray section
Sprayer nozzle 1 (nozzle valve 1)—supply hose 279 cm (110 inches)	Sprayer nozzles 5 and 6 (nozzle valve 5)—supply hose 81 cm (32 inches) with 2 branch hoses	Sprayer nozzle 9 (nozzle valve 7)—supply hose 188 cm (74 inches)
Sprayer nozzle 2 (nozzle valve 2)—supply hose 234 cm (92 inches)	Sprayer nozzles 7 and 8 (nozzle valve 6)—supply hose 81 cm (32 inches) with 2 branch hoses	Sprayer nozzle 10 (nozzle valve 8)—supply hose 188 cm (74 inches)
Sprayer nozzle 3 (nozzle valve 3)—supply hose 188 cm (74 inches)		Sprayer nozzle 11 (nozzle valve 9)—supply hose 234 cm (92 inches)
Sprayer nozzle 4 (nozzle valve 4)—supply hose 188 cm (74 inches)		Sprayer nozzle 12 (nozzle valve 10)—supply hose 279 cm (110 inches)

Note: Refer to [Figure 125](#) in [Assembling the Hoses to Nozzle Valves 1 through 4](#) (page 59), [Figure 126](#) in [Assembling the Hoses to Nozzle Valves 5 and 6](#) (page 59), and [Figure 127](#) in [Assembling the Hoses to Nozzle Valves 7 through 10](#) (page 60) for the nozzle-valve positions.

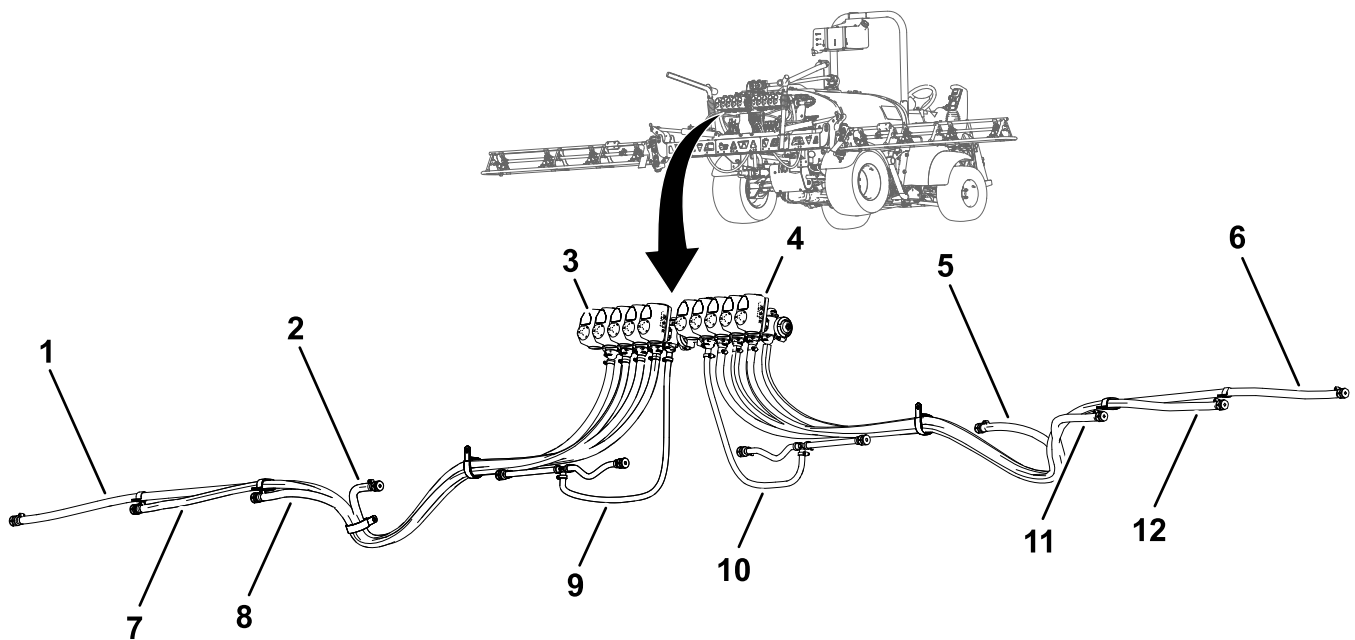

g200077

Figure 124

- | | | |
|---|--|--|
| 1. Supply hose 279 cm (110 inches)—sprayer nozzle 1 | 5. Supply hose 188 cm (74 inches)—sprayer nozzle 9 | 9. Supply hose 81 cm (32 inches)—sprayer nozzle 5 and 6 |
| 2. Supply hose 188 cm (74 inches)—sprayer nozzle 4 | 6. Supply hose 279 cm (110 inches)—sprayer nozzle 12 | 10. Supply hose 81 cm (32 inches)—sprayer nozzle 7 and 8 |
| 3. Nozzle valve 1 | 7. Supply hose 234 cm (92 inches)—sprayer nozzle 2 | 11. Supply hose 188 cm (74 inches)—sprayer nozzle 10 |
| 4. Nozzle valve 10 | 8. Supply hose 188 cm (74 inches)—sprayer nozzle 3 | 12. Supply hose 234 cm (92 inches)—sprayer nozzle 11 |

Assembling the Hoses to Nozzle Valves 1 through 4

1. Assemble the straight barbed fitting of a supply-hose 279 cm (110 inches) onto the coupler of nozzle valve 1 (Figure 125).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

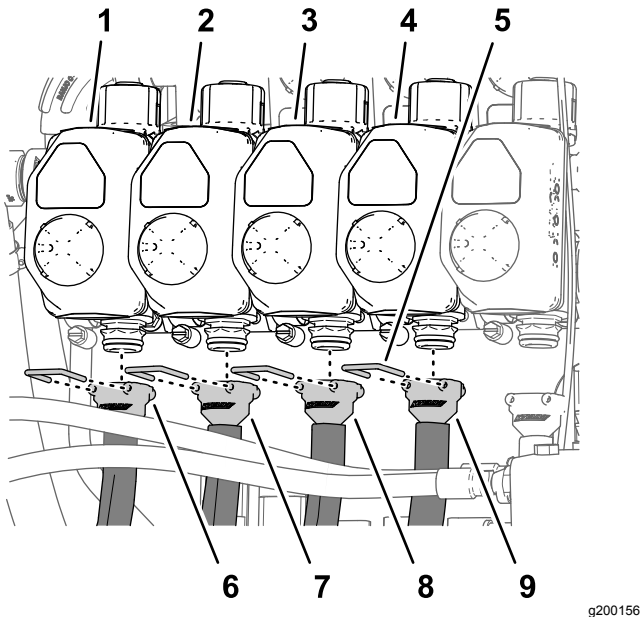


Figure 125

- | | |
|-------------------|------------------------------------|
| 1. Nozzle valve 1 | 6. Supply-hose 279 cm (110 inches) |
| 2. Nozzle valve 2 | 7. Supply-hose 234 cm (92 inches) |
| 3. Nozzle valve 3 | 8. Supply-hose 188 cm (74 inches) |
| 4. Nozzle valve 4 | 9. Supply-hose 188 cm (74 inches) |
| 5. Retainer | |

2. Secure the barbed fitting to the coupler with a retainer (Figure 125).
3. Assemble the straight barbed fitting of a supply-hose 234 cm (92 inches) onto the coupler of nozzle valve 2 (Figure 125).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

4. Secure the barbed fitting to the coupler with a retainer (Figure 125).
5. Assemble the straight barbed fitting of a supply-hose 188 cm (74 inches) onto the coupler of nozzle valve 3 (Figure 125).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

6. Secure the barbed fitting to the coupler with a retainer (Figure 125).

7. Assemble the straight barbed fitting of a supply-hose 188 cm (74 inches) onto the coupler of nozzle valve 4 (Figure 125).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

8. Secure the barbed fitting to the coupler with a retainer (Figure 125).

Assembling the Hoses to Nozzle Valves 5 and 6

Note: Supply-hose assembly 81 cm (32 inches) has a T-fitting with 2 branch hoses and 2 single barbed-hose shanks.

1. Assemble the straight barbed fitting of a supply-hose 81 cm (32 inches) onto the coupler of nozzle valve 5 (Figure 126).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

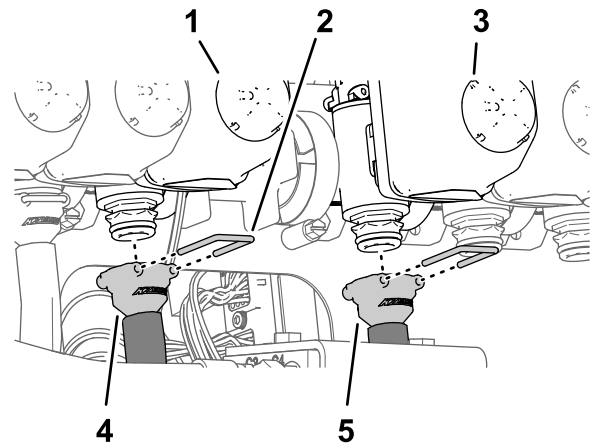


Figure 126

- | | |
|-------------------|----------------------------------|
| 1. Nozzle valve 5 | 4. Supply-hose 81 cm (32 inches) |
| 2. Retainer | 5. Supply-hose 81 cm (32 inches) |
| 3. Nozzle valve 6 | |

2. Secure the barbed fitting to the coupler with a retainer (Figure 126).
3. Assemble the straight barbed fitting of a supply-hose 81 cm (32 inches) onto the coupler of nozzle valve 6 (Figure 126).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

4. Secure the barbed fitting to the coupler with a retainer (Figure 126).

Assembling the Hoses to Nozzle Valves 7 through 10

1. Assemble the straight barbed fitting of a supply-hose 188 cm (74 inches) onto the coupler of nozzle valve 7 (Figure 127).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

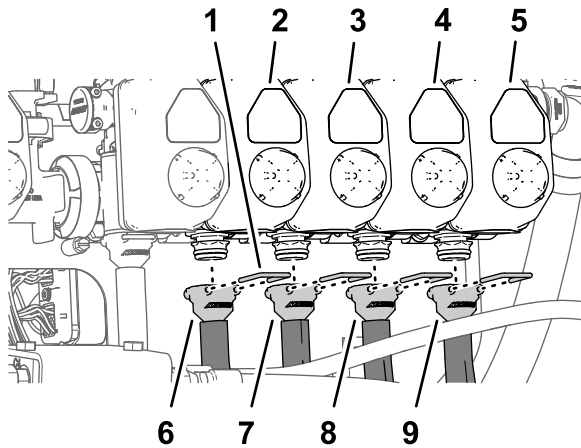


Figure 127

g200158

- | | |
|--------------------|------------------------------------|
| 1. Retainer | 6. Supply-hose 188 cm (74 inches) |
| 2. Nozzle valve 7 | 7. Supply-hose 188 cm (74 inches) |
| 3. Nozzle valve 8 | 8. Supply-hose 234 cm (92 inches) |
| 4. Nozzle valve 9 | 9. Supply-hose 279 cm (110 inches) |
| 5. Nozzle valve 10 | |

2. Secure the barbed fitting to the coupler with a retainer (Figure 127).
3. Assemble the straight barbed fitting of a supply-hose 188 cm (74 inches) onto the coupler of nozzle valve 8 (Figure 127).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

4. Secure the barbed fitting to the coupler with a retainer (Figure 127).
5. Assemble the straight barbed fitting of a supply-hose 234 cm (92 inches) onto the coupler of nozzle valve 9 (Figure 127).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

6. Secure the barbed fitting to the coupler with a retainer (Figure 127).
7. Assemble the straight barbed fitting of a supply-hose 279 cm (110 inches) onto the coupler of nozzle valve 10 (Figure 127).

Note: Ensure that the barbed fitting is fully seated onto the coupler.

8. Secure the barbed fitting to the coupler with a retainer (Figure 127).

Routing the Supply Hoses to the Sprayer Nozzles

1. Route the hoses for sprayer nozzles 1, 2, 3, and 4 through the R-clamp at the left outboard end of the center-spray section (Figure 128 and Figure 129).

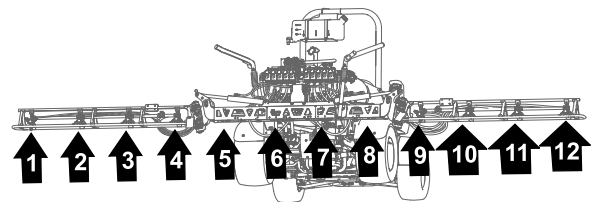


Figure 128

g200162

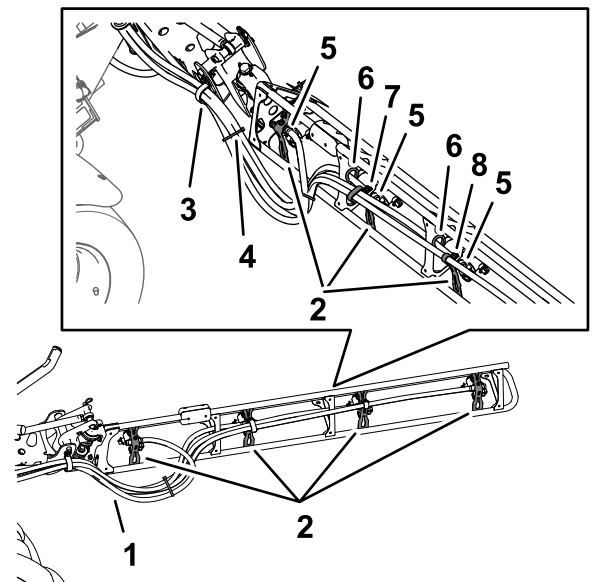


Figure 129

g200185

- | | |
|--------------------|--|
| 1. Hoses | 5. Single barbed-hose shank (1/2 inch) |
| 2. Nozzle supports | 6. Grommet |
| 3. R-clamp | 7. Double R-clamp |
| 4. Cable tie | 8. Single R-clamp |

2. Route the hoses for sprayer nozzles 7, 8, 9, and 10 through the R-clamp at the right outboard end of the center-spray section (Figure 128 and Figure 129).
3. Route the supply hoses 279 cm (110 inches) and barbed-hose shanks (3/4 inch) along the spray section to sprayer nozzles 1 and 10 as shown in (Figure 128 and Figure 129).

4. Route the supply hoses 234 cm (92 inches) and barbed-hose shanks (3/4 inch) along the spray section to sprayer nozzles 2 and 9 along the spray section as shown in [Figure 128](#) and [Figure 129](#).

5. Route the supply hoses 188 cm (74 inches) and barbed-hose shanks (3/4 inch) along the spray section to sprayer nozzles 3 and 8 as shown in [Figure 128](#) and [Figure 129](#).

Note: Route the hoses through the lower rear grommets in the tube-frame brackets.

6. Route the supply hoses 188 cm (74 inches) and barbed-hose shanks (3/4 inch) along the spray section to sprayer nozzles 4 and 7 as shown in [Figure 128](#) and [Figure 129](#).

Note: Route the hoses through the lower rear grommets in the tube-frame brackets.

7. Bundle the 4 hoses for the sprayer nozzles together with a cable tie as shown in [Figure 129](#).

Installing the Sprayer Nozzles at the Outer-Spray Sections

1. Align the transfer tube in the saddle of a sprayer nozzle ([Figure 130](#)) with the hole in the side of the single barbed-hose shank (1/2 inch).

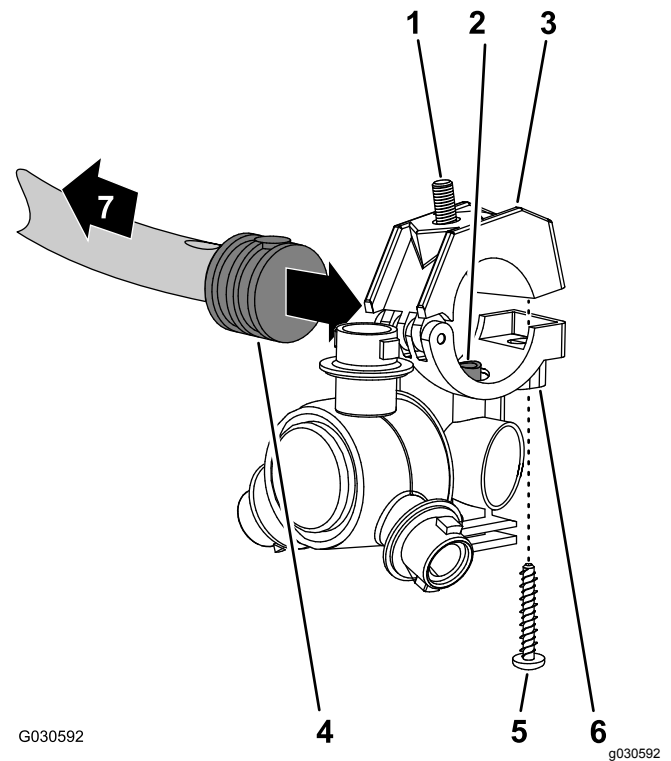


Figure 130

- | | |
|--|---|
| 1. Hex-head bolt (5/16 x 3/4 inch—stainless steel) | 5. Stainless steel screw (#12 x 1-1/4 inches) |
| 2. Transfer tube | 6. Sprayer-nozzle body |
| 3. Upper clamp half | 7. Toward the spray section |
| 4. Single barbed-hose shank (1/2 inch) | |

2. Close the upper clamp half around the barbed-hose shank and secure the clamp half and spray-nozzle body ([Figure 130](#)) with the stainless steel screw (#12 x 1-1/4 inches); torque the stainless steel screw to 14 to 18 N·m (20 to 25 in-lb).

Note: Ensure that the hex-head bolt (5/16 x 3/4 inch) is seated in the recess in the upper clamp half when closing the clamp.

3. Assemble the sprayer nozzles to the outer-spray section as follows:
 - At the nozzle positions 1 and 4, assemble the sprayer nozzle to the nozzle mount (A of [Figure 131](#)) with the flange locknut (5/16 inch) that you removed in step 2 of [Removing the Sprayer Nozzles from the Outer-Spray Sections](#) (page 55).
 - At the nozzle positions 2 and 3, assemble the sprayer nozzle to the nozzle mount (A and B of [Figure 131](#)) with the flange locknut (5/16 inch) that you removed in step 2 of [Removing the Sprayer Nozzles from the Outer-Spray Sections](#) (page 55).

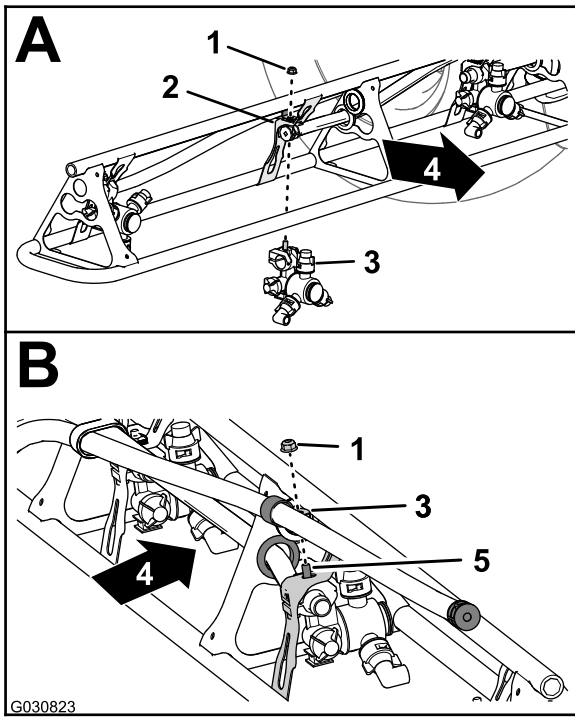


Figure 131

- | | |
|-------------------------------|--|
| 1. Flange locknut (5/16 inch) | 4. Back of the machine |
| 2. Nozzle mount | 5. Hex-head bolt (stainless steel—5/16 x 3/4 inch) |
| 3. Sprayer nozzle | |
-
4. Torque the flange locknut to 1978 to 2542 N·cm (175 to 225 in·lb).
 5. Repeat steps 1 through 4 for the other sprayer nozzles for the spray section.
 6. Repeat steps 1 through 5 to the outer-spray section at the other side of the machine.

24

Connecting the Kit Wire Harness at the Back of the Machine

No Parts Required

Connecting the Wire Harness to the Pressure Transducer and the ASC 10

1. Insert the 3-socket connector 61 cm (24 inch) branch of the kit wire harness labeled PRESSURE TRANSDUCER GREEN WEDGE into the 3-pin connector of the pressure transducer (Figure 132).

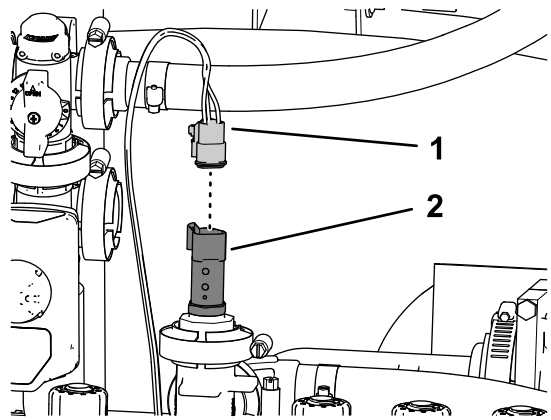


Figure 132

- | | |
|---|--|
| 1. 3-socket connector—61 cm (24 inch) kit wire-harness branch (PRESSURE TRANSDUCER GREEN WEDGE) | 2. 3-pin connector (pressure transducer) |
|---|--|
-
2. Insert the 40-socket connector of the 102 cm (40 inch) branch of the kit wire harness into the 40-pin connector if the ASC 10 spray controller (Figure 133).

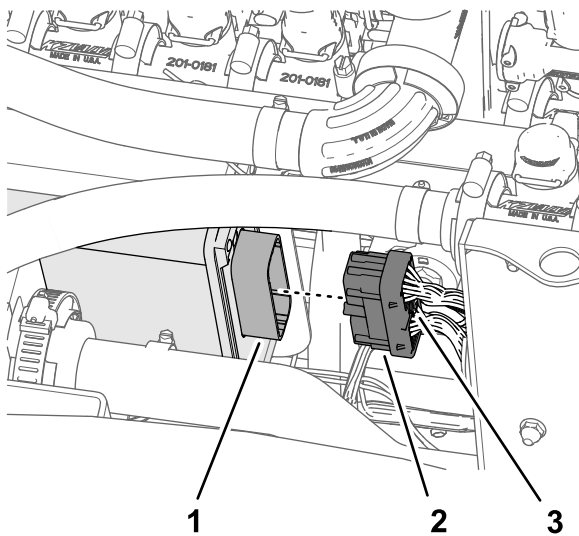


Figure 133

g281673

1. 40-pin connector (ASC 10
2. 40-socket connector (102 cm (40 inch) wire-harness branch)
3. Thumbscrew spray controller)
3. Thread the thumb screw of the 40-socket connector into the ASC 10 connector by hand (Figure 133).
4. Insert the 4-socket connector labeled TO ASC 10 into the 4-pin connector of the ASC 10 spray controller (Figure 134).

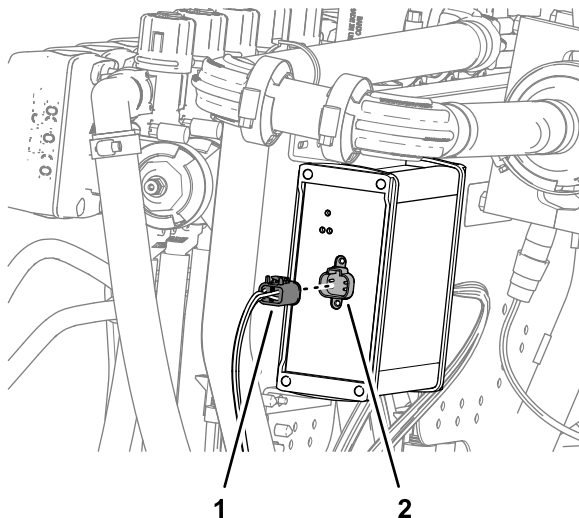


Figure 134

g281443

1. 4-socket connector (TO ASC 10)
2. 4-pin connector (ASC 10 spray controller)

25

Connecting the Pressure-Sense Tube for the Dash Gauge

No Parts Required

Connecting the Pressure-Sense Tube for the Dash Gauge

Machines without the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

1. Align the end of the pressure-sense tube (plastic) for the pressure gauge in the dash with the locking collar for the tube coupler (Figure 135).

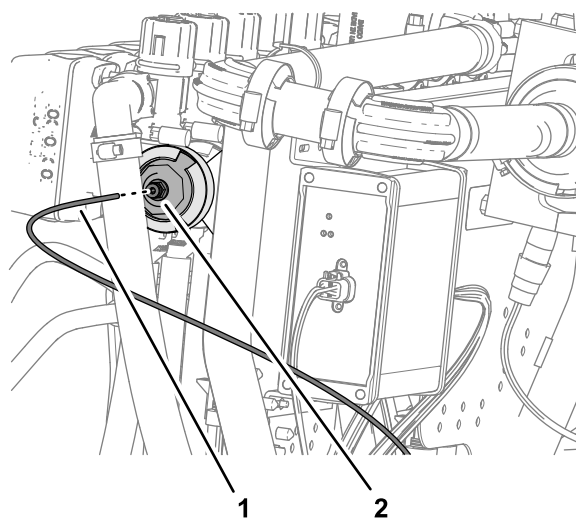


Figure 135

g281444

1. Pressure-sense tube (dash-pressure gauge)
2. Locking collar (tube coupler)

2. Insert the sense tube into the locking collar until the tube is fully seated (Figure 135).

Installing the Pressure Sense-Tube

Machines with the Optional Hand Wand Kit or the Optional Electric Hose Reel Kit

1. Assemble the 90° fitting of the shutoff valve for the optional spray wand kit or the electric hose reel kit onto the flange of nozzle valve 10 with the flange clamp and gasket, and tighten the clamp by hand (Figure 136).

26


Connecting the Optional Foam-Marker Kit

Parts needed for this procedure:

6	Cable tie
---	-----------

Routing the Tubing for the Foam-Marker Nozzles

1. Route the tubes for the foam nozzles at the left- and right-spray section, inboard and through the R-clamp near the pivot point for each outer-spray section ([Figure 139](#)).

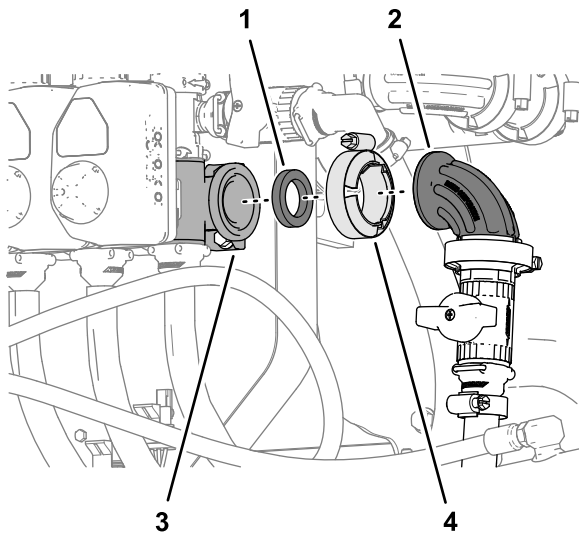


g281603

Figure 136

1. Gasket
2. 90° fitting (shutoff valve)
3. Flange (nozzle valve 10)
4. Flange clamp


2. Align the end of the pressure-sense tube (plastic) for the pressure gauge in the dash with the locking collar for the tube coupler in the 90° fitting of the shutoff valve of the hand spray wand or the electric hose reel kit ([Figure 137](#)).

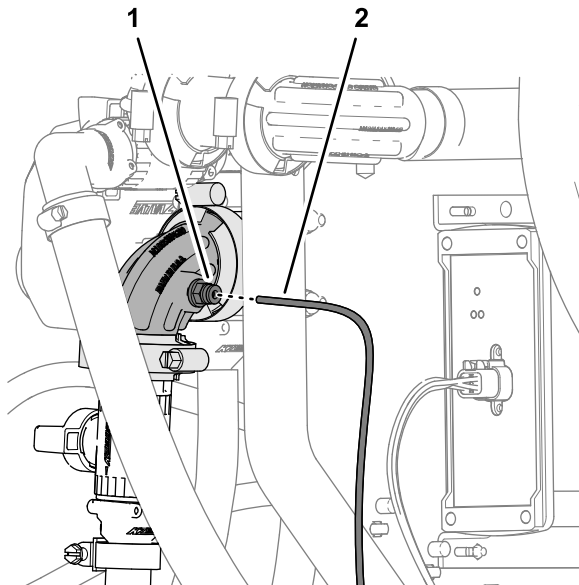

g281604

Figure 137

1. Tube coupler (90° fitting—shutoff valve)
2. Pressure-sense tube (dash gauge)
3. Insert the sense tube into the locking collar until the tube is fully seated ([Figure 137](#)).

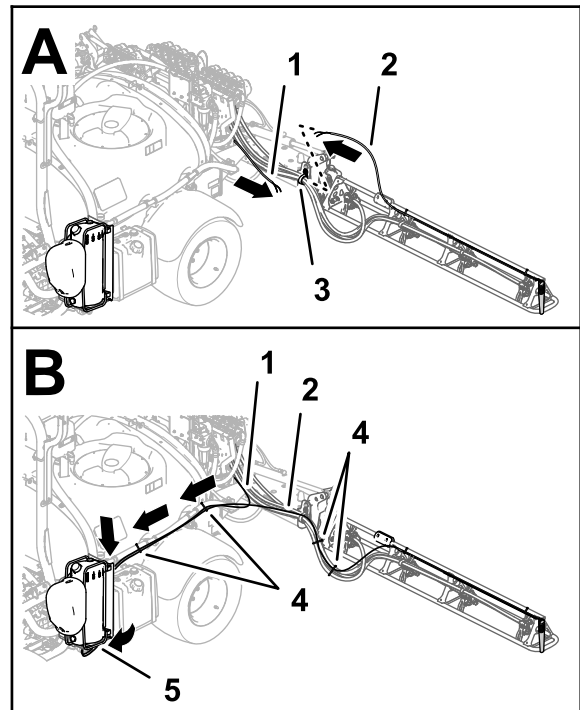

g202021

Figure 138

Foam Marker Kits 2016 and Before

1. Tubing—foam-marker nozzle (right-spray section)
2. Tubing—foam-marker nozzle (left-spray section)
3. R-clamp
4. Cable ties
5. Connection panel (foam-marker compressor)


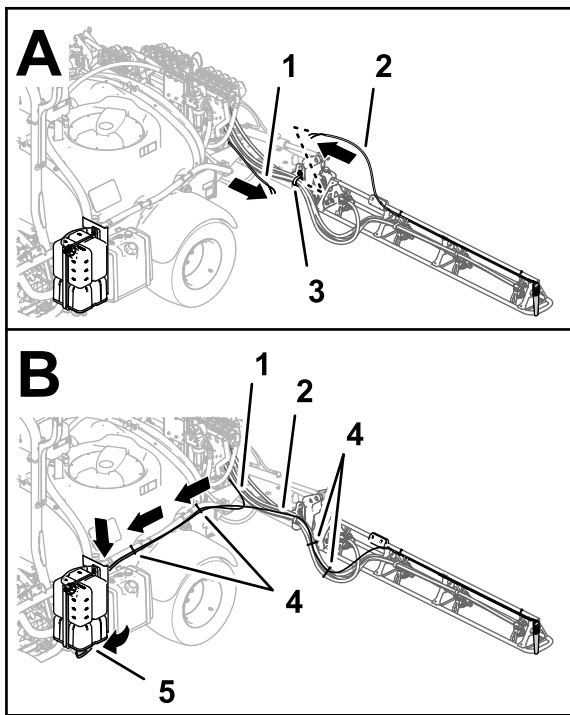


Figure 139

Foam Marker Kits 2017 and Later

- | | |
|--|--|
| 1. Tubing—foam-marker nozzle (right-spray section) | 4. Cable ties |
| 2. Tubing—foam-marker nozzle (left-spray section) | 5. Connection panel (foam-marker compressor) |
| 3. R-clamp | |

2. Route the tubes forward along the left side of the sprayer tank (Figure 139).
3. Secure the tubes for the left and right foam-marker nozzles to the sprayer hoses with 4 cable ties as shown on Figure 139.
4. Secure the tubes for the left and right foam-marker nozzles to the tubes for the agitation with 2 cable ties as shown in Figure 139.

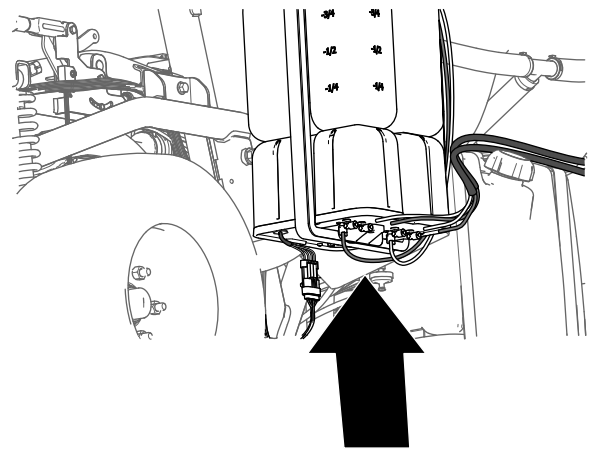

g197746

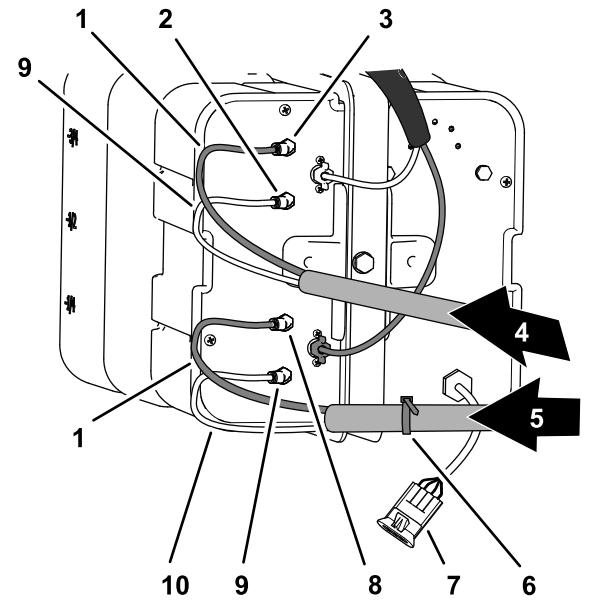


Figure 140

- | | |
|--|---|
| 1. Blue tube | 6. Cable tie |
| 2. Air fitting (left-spray section) | 7. Electrical connector |
| 3. Liquid fitting (left-spray section) | 8. Liquid fitting (right-spray section) |
| 4. Foam tubes (left-spray section) | 9. Clear tube |
| 5. Foam tubes (right-spray section) | 10. Air fitting (right-spray section) |

g266328

Installing the Liquid and Air Tubes at the Compressor

Foam Marker Kits 2017 and After

1. Route the foam tubes for the right boom as shown in Figure 140.

2. Insert the clear tube into the air fitting at the side compressor plate (Figure 140 and Figure 141).

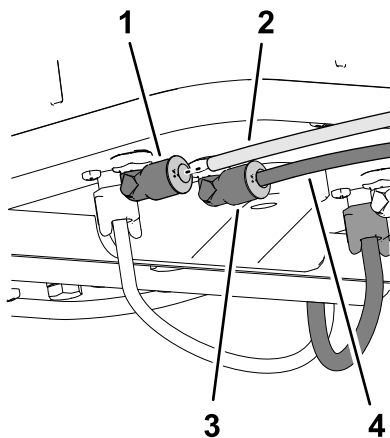


Figure 141

g201938

1. Air fitting
2. Clear tube
3. Liquid fitting
4. Blue tube

3. Insert the blue tube into the liquid fitting at the side compressor plate ([Figure 140](#) and [Figure 141](#)).
4. Route the foam tubes for the left boom as shown in [Figure 140](#).
5. Insert the clear tube into the air fitting at the side compressor plate ([Figure 140](#) and [Figure 141](#)).
6. Insert the blue tube into the liquid fitting at the side compressor plate ([Figure 140](#) and [Figure 141](#)).

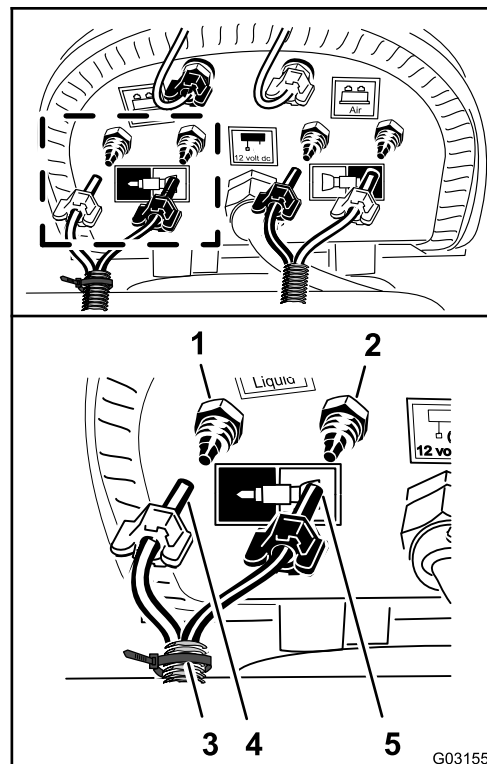


Figure 142

g031555

1. Compression fitting—water (right-spray section—blue tube)
2. Compression fitting—air (right-spray section—clear tube)
3. Cable tie
4. Compression nut—air (right-spray section—blue tube)
5. Compression nut—water (right-spray section—clear tube)

Installing the Liquid and Air Tubes at the Compressor

Foam Marker Kits 2016 and Before

1. Connect the tubing with the cable tie that you prepared in step 9 of [Preparing the New Tube Assemblies for the Foam-Marker Nozzles](#) (page 16) by aligning the blue tube for the right spray section onto the compression fitting for the right-spray section water circuit ([Figure 142](#)).
2. Assemble the compression nut for the tube onto the fitting and tighten the nut by hand ([Figure 142](#)).
3. Aligning the clear tube for the right-spray section onto the compression fitting for the right-spray section air circuit ([Figure 142](#)).
4. Assemble the compression nut for the tube onto the fitting and tighten the nut by hand ([Figure 142](#)).
5. Connect the unmarked (no cable tie) tubing by aligning the blue tube for the left-spray section onto the compression fitting for the left-spray section water circuit ([Figure 143](#)).

27

Connecting the Optional Ultra Sonic Boom Kit

No Parts Required

Procedure

1. Connect the 3-socket connector of the sonic boom wire harness to the 3-pin connector of the cable for the right ultra-sonic sensor (A of [Figure 144](#)).

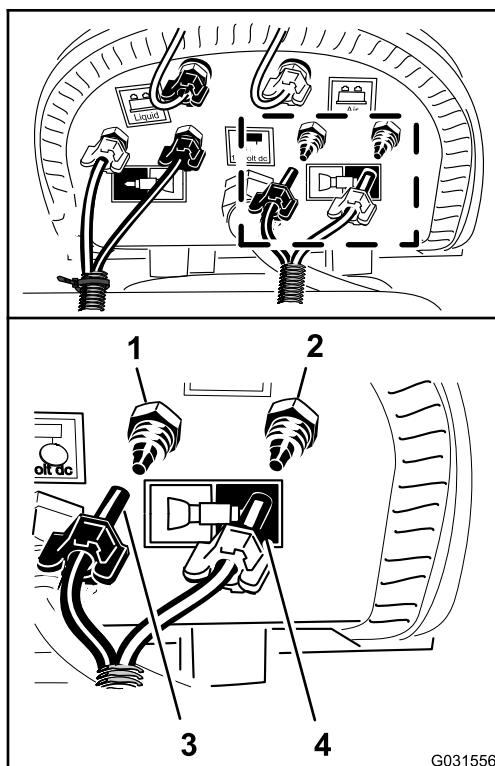


Figure 143

g031556

1. Compression fitting—water (left-spray section—blue tube)
 2. Compression fitting—air (left-spray section—clear tube)
 3. Compression nut (left-spray section—blue tube)
 4. Compression nut (left-spray section—clear tube)
-
6. Assemble the compression nut for the tube onto the fitting and tighten the nut by hand ([Figure 143](#)).
 7. Aligning the clear tube for the left spray section onto the compression fitting for the left-spray section air circuit ([Figure 143](#)).
 8. Assemble the compression nut for the tube onto the fitting and tighten the nut by hand ([Figure 143](#)).
 9. Secure the foam marker tubing to the sprayer nozzle hoses with 2 cable ties ([Figure 139](#)).

28

Assembling the Optional Covered-Boom Kit

Parts needed for this procedure:

1	Cover extension assembly (12-nozzle—Toro 120-0621)
22	Pop rivet (Toro Part No. 114439)
4	Support bracket (center-section cover—Toro Part No. 131-3703-03)
4	Clip nut (Toro Part No. 94-2413)
16	Flange-head bolts (3/8 x 1-1/4 inches—Toro Part No. 110-5050)
16	Flange locknuts (3/8 inch—Toro Part No. 104-8301)
2	Cover strap (Toro Part No. 120-0629)
4	Flange-head bolts (5/16 x 1-1/4 inches—Toro Part No. 323-36)

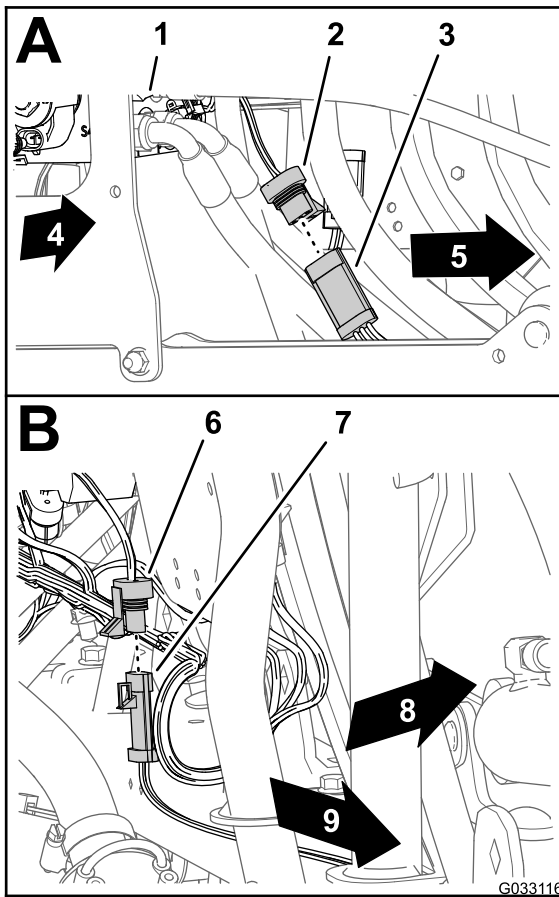


Figure 144

g033116

1. Lift-cylinder manifold
2. 3-socket connector (sonic boom wire harness—right sensor)
3. 3-pin connector (cable—right ultra-sonic sensor)
4. Right side of the machine
5. 3-socket connector (sonic boom wire harness—left sensor)
6. 3-pin connector (cable—left ultra-sonic sensor)
7. Left side of the machine
8. Back of the machine
9. Left side of the machine

2. Connect the 3-socket connector of the sonic boom wire harness from the 3-pin connector of the cable for the left ultra-sonic sensor (B of [Figure 144](#)).

Installing the Cover Extension on to the Center-Section Cover (11-Nozzle)

1. Using a drill with a 5 mm (3/16 inch) drill bit, drill the 11 pop-rivets ([Figure 145](#)) that secure the reinforcement plate (with a single row of rivets) and rubber cover to the end of the 11-nozzle section cover for the center-spray section that you removed in step 2 of [6 Removing the Center-Section Cover \(11-nozzle\) of the Optional Covered-Boom Kit \(page 19\)](#).

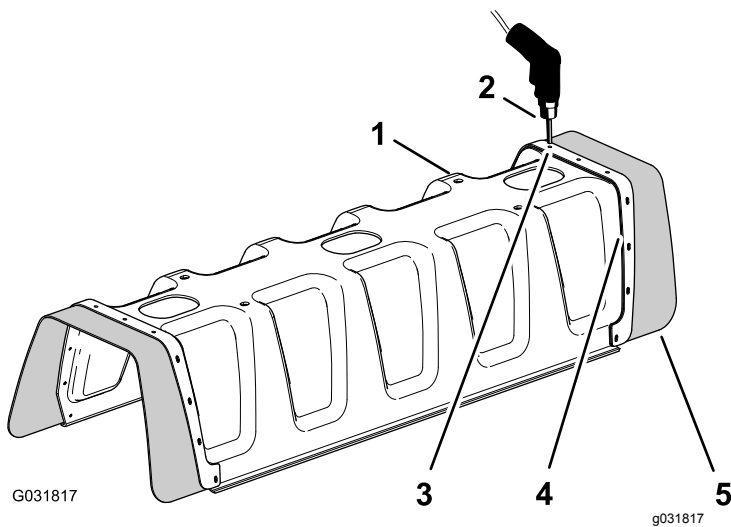


Figure 145

1. 11-nozzle section cover
2. Drill and 5 mm (3/16) drill bit
3. Rivet (3/16 x 1/2)
4. Reinforcement plate (single row)
5. Rubber cover

2. Remove the reinforcement plate, 11 washers (3/16 inch), and rubber cover from the 11-nozzle boom cover (Figure 145).

Note: Retain the reinforcement plate, washers, and rubber cover for installation in steps 5 and 6.

3. Align the holes in the reinforcement plate (double row) on the cover extension with the holes in the end of the 11-nozzle boom cover (Figure 146).

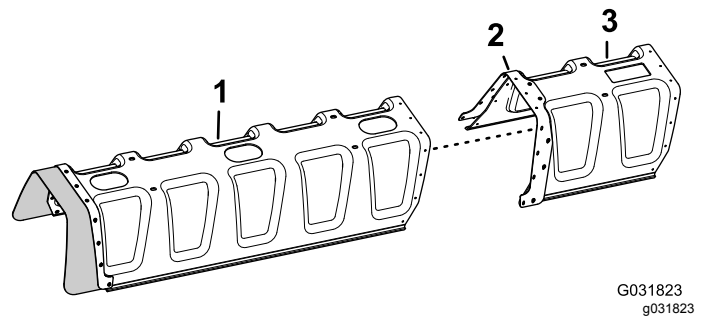


Figure 146

1. 11-nozzle section cover
2. Reinforcement plate (double row)
3. Cover extension

4. Secure the cover extension to the 11-nozzle section cover (Figure 147) with 11 pop rivets (Toro Part No. 114439).

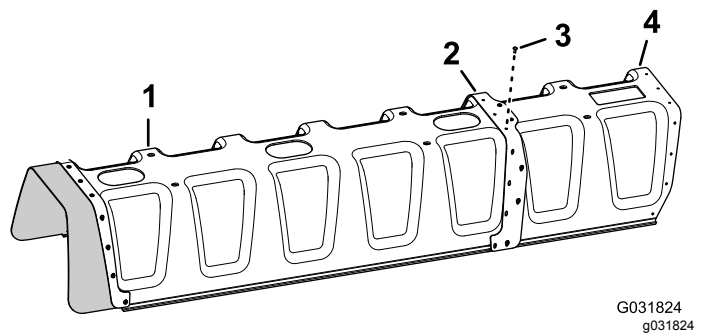


Figure 147

1. 11-nozzle section cover
2. Reinforcement plate (double row)
3. Pop rivets (Toro Part No. 114439)
4. Cover extension

5. Align the holes in the rubber cover and the reinforcement plate (single row) that you removed in step 2 with the holes in the end of the over extension (Figure 148).

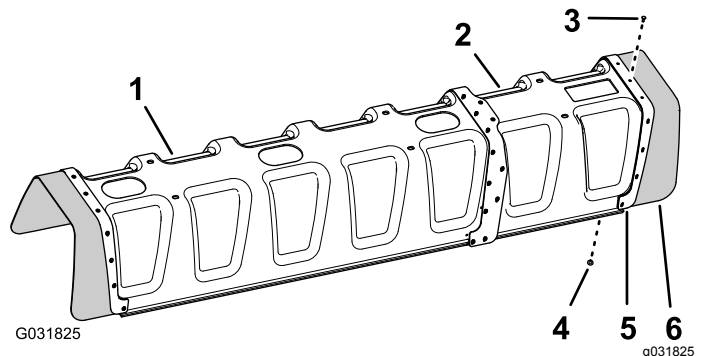


Figure 148

1. 11-nozzle section cover
2. Cover extension
3. Pop rivet (Toro Part No. 114439)
4. Washer (3/16 inch)
5. Reinforcement plate (single row)
6. Rubber cover

6. Secure the reinforcement plate and rubber cover to the cover extension with the 11 pop rivets (Toro Part No. 114439) and the 11 washers (3/16 inch) that you removed in step 5.

Note: Align the washers (3/16 inch) against the inside surface of the cover extension.

Installing the Support Bracket for the Center-Section Cover

1. Install the 4 clip nuts (Toro Part No. 94-2413) onto the 2 support bracket of the center-section cover (Toro Part No. 131-3703-03) as shown in (Figure 149).

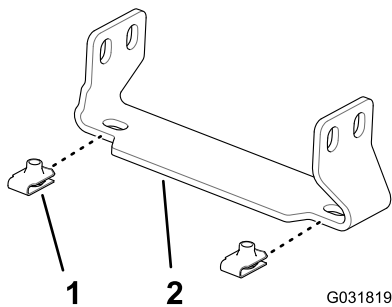


Figure 149

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Clip nut (Toro Part No. 94-2413) | <ol style="list-style-type: none"> 2. Support bracket (center-section cover—Toro Part No. 131-3703-03) |
|---|---|

2. At the extension for the center-spray section, locate the 2 pairs of holes in the vertical face of the truss frame with a 25 mm (1 inch) hole spacing (Figure 150).

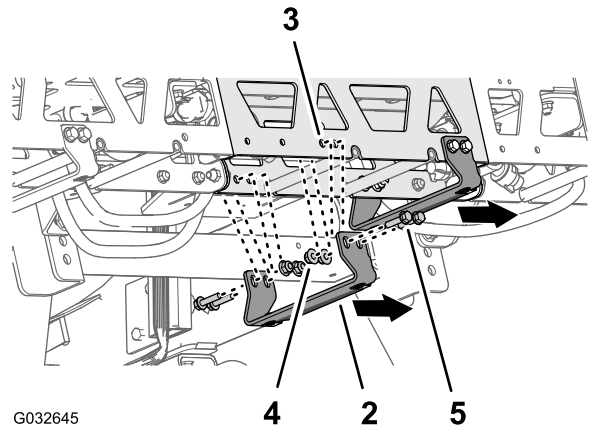
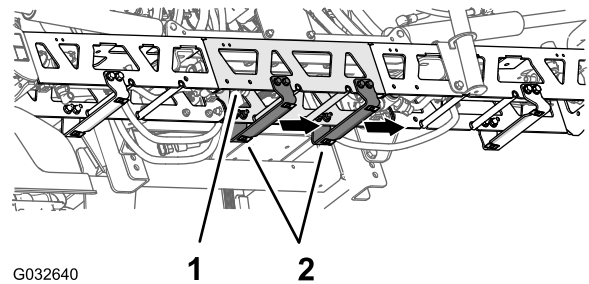


Figure 150

- | | |
|--|--|
| <ol style="list-style-type: none"> 1. Extension (center-spray section) 2. Support bracket—Toro Part No. 131-3703-03 (wide flange to the right) 3. Truss-frame hole (extension for the center-spray section) | <ol style="list-style-type: none"> 4. Flange locknut (3/8 inch—Toro Part No. 104-8301) 5. Flange-head bolt (3/8 x 1-1/4 inches—Toro Part No. 110-5050) |
|--|--|
3. Align the holes in a support bracket (Toro Part No. 131-3703-03) to the holes in the extension for the center-spray section that you identified in step 2 with the wide flange of the bracket to the left; refer to Figure 150.
 4. Assemble the support bracket to the truss frame (Figure 150) with 4 flange-head bolts (3/8 x 1-1/4 inches—Toro Part No. 110-5050) and 4 flange locknuts (3/8 inch—Toro Part No. 104-8301).
 5. Repeat steps 2 through 4 at the other 2 pairs of holes in the extension for the center-spray section and the other support bracket, flange-head bolts, and flange locknuts.
 6. Torque the nuts and bolts to 37 to 45 N·m (27 to 33 ft·lb).

Installing the Center-Section Cover

1. Align the holes in the center section cover with the holes in the support brackets for the center-section cover (Figure 151).

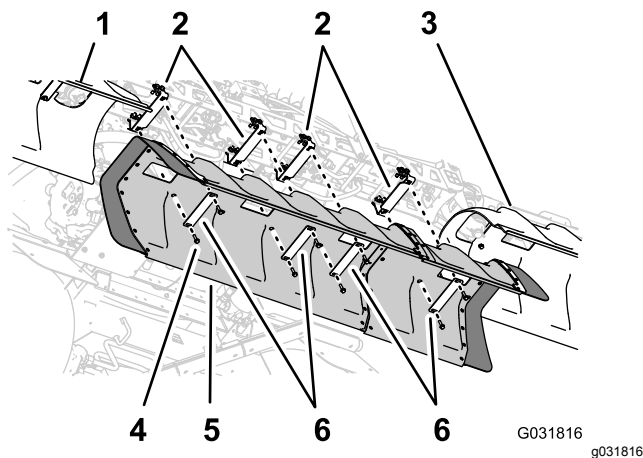


Figure 151

1. Left boom cover
 2. Support brackets
 3. Right boom cover
 4. Flange-head bolt (5/16 x 1-1/4 inches)
 5. Center boom cover
 6. Cover straps
2. Align the holes in 2 of the cover straps that you removed in step 1 of 6 Removing the Center-Section Cover (11-nozzle) of the Optional Covered-Boom Kit (page 19) with the hose in the cover and 2 of the support brackets (Figure 151).
 3. Assemble the cover straps and cover to the support brackets with the 4 flange-head bolts (5/16 x 1-1/4 inches) that you removed in step 1 of 6 Removing the Center-Section Cover (11-nozzle) of the Optional Covered-Boom Kit (page 19).
 4. Align the holes in the 2 cover straps (Toro Part No. 120-0629) with the 4 remaining holes in the cover and 4 remaining holes in the support brackets (Figure 151).
 5. Assemble the cover straps and cover to the support brackets (Figure 151) with the 4 flange-head bolts (5/16 x 1-1/4 inches—Toro Part No. 323-36).
 6. Torque the bolts to 1978 to 2542 N·cm (175 to 225 in-lb).

29

Installing the Navigation Receiver

Parts needed for this procedure:

1	Receiver plate
1	Spacer (3/8 x 1 inch)
1	Receiver mount
1	Bolt (3/8 x 3-1/4 inches)
1	Lock washer (3/8 inch)
1	Washer (3/8 x 13/16 inch)
1	Flange locknut (3/8 inch)
1	Flange-head bolt (5/16 x 3/4 inch)
1	Flange locknut (5/16 inch)
2	Flange-head bolt (3/8 x 1-1/2 inches)
2	Spacer (3/8 x 7/16 inch)
1	Navigation receiver—X25 GeoLink Precision Spray System Kit, Base, WAAS (Model 41630)
3	Hex-head bolt (5 x 16 mm)
3	Washer (5 mm)
1	Bulkhead adapter (optional CDMA RTK correction modem kit or GSM RTK correction modem kit)
1	Cellular antenna (optional CDMA RTK correction modem kit or GSM RTK correction modem kit)
1	Coaxial cable (optional CDMA RTK correction modem kit or GSM RTK correction modem kit)

Assembling the Receiver Mount

1. Align the holes in the navigation-receiver plate, spacer (3/8 x 1 inch), and receiver mount (Figure 152).

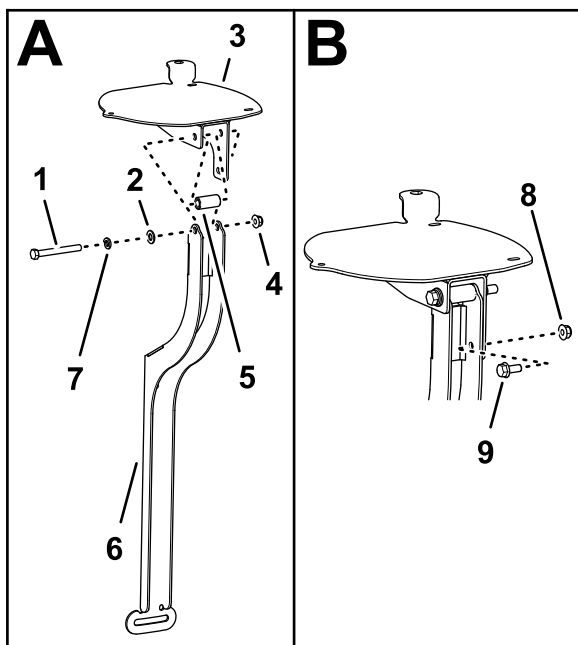


Figure 152

g200645

1. Bolt (3/8 x 3-1/4 inches)
 2. Washer (3/8 x 13/16 inch)
 3. Navigation-receiver plate
 4. Flange locknut (3/8 inch)
 5. Spacer (3/8 x 1 inch)
 6. Receiver mount
 7. Lock washer (3/8 inch)
 8. Flange locknut (5/16 inch)
 9. Flange-head bolt (5/16 x 3/4 inch)
2. Assemble the receiver plate and spacer to the mount with a bolt (3/8 x 3-1/4 inches), lock washer (3/8 inch), washer (3/8 x 13/16 inch), and flange locknut (3/8 inch) as shown in [Figure 152](#).
 3. Assemble the flange-head bolt (5/16 x 3/4 inch) and flange locknut (5/16 inch) through the smaller hole in the receiver mount and the slot in the receiver plate ([Figure 152](#)).
 4. Tighten the bolts and nuts so that you can rotate the receiver plate with slight resistance.

Installing the Receiver Mount to the Machine

1. Assemble the receiver mount and spacer (3/8 x 7/16 inch) to the roll bar with the flange-head bolt (3/8 x 1-1/2 inches) as shown in [Figure 153](#).

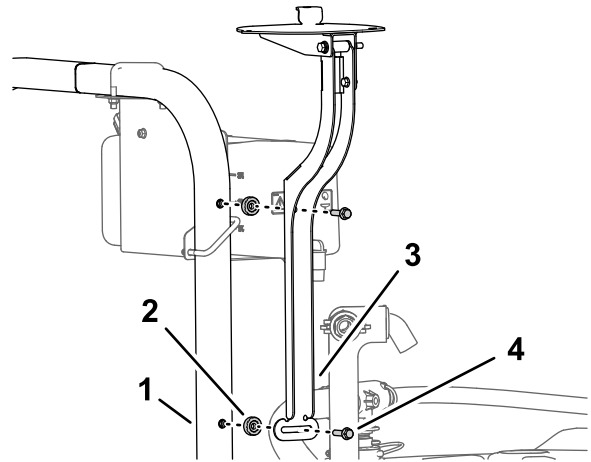


Figure 153

g200669

1. Roll bar (ROPS)
2. Spacer (3/8 x 7/16 inch)
3. Receiver mount
4. Flange-head bolt (3/8 x 1-1/2 inches)

2. Tighten the bolts so that you can rotate the receiver plate with slight resistance.
3. Level the receiver plate left to right ([Figure 154](#)).

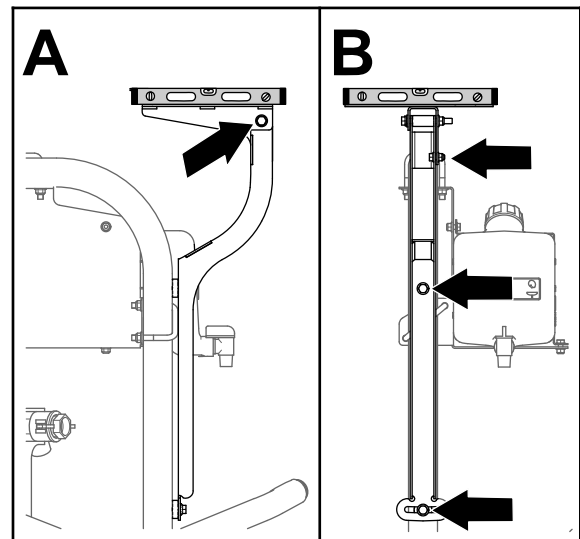


Figure 154

g200675

4. Torque the flange-head bolt (5/16 x 3/4 inch) and flange locknut (5/16 inch) to 1978 to 2542 N·cm (175 to 225 in-lb).
5. Level the receiver plate front to back ([Figure 154](#)).

- Torque the bolt (3/8 x 3-1/4 inches) and flange locknut (3/8 inch) to 37 to 45 N·m (27 to 33 ft-lb).

Assembling the Navigation Receiver to the Receiver Plate

- Align the 3 threaded in the base of the navigation receiver to the 3 holes in the receiver mount (Figure 155).

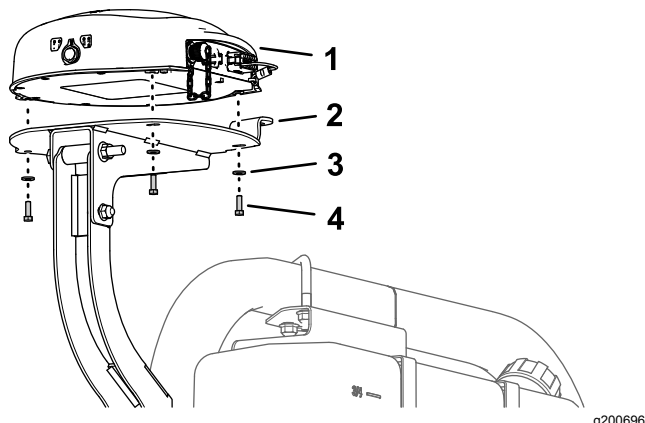


Figure 155

- | | |
|------------------------|------------------------------|
| 1. Navigation receiver | 3. Washer (5 mm) |
| 2. Receiver plate | 4. Hex-head bolt (5 x 16 mm) |

- Assemble the receiver to the mount (Figure 155) with the 3 hex-head bolt (5 x 16 mm) and 3 washers (5 mm).
- Torque the 3 bolts to 576 to 712 N·cm (51 to 63 in-lb).

Installing the RTK Antenna to the Navigation Receiver

Note: Install the RTK antenna when your machine is equipped with a CDMA RTK or GSM RTK correction modem.

- Align the coaxial coupler through the opening in RTK-antenna flange with the bulkhead threads of the coupler down (Figure 156).

Note: Rotate the coaxial coupler as needed to align the flat of the bulkhead threads with the flat at the opening in RTK-antenna flange.

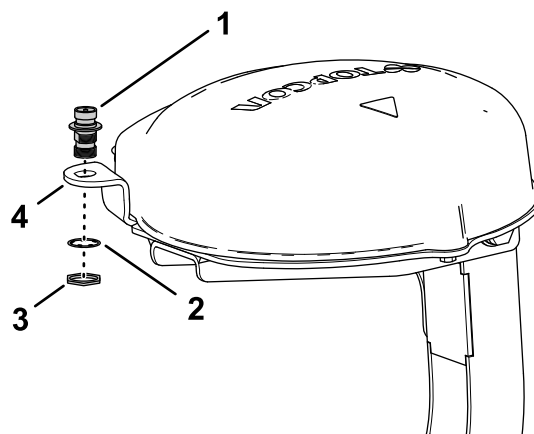


Figure 156

- | | |
|--------------------|--|
| 1. Coaxial coupler | 3. Jam nut |
| 2. Lock washer | 4. RTK-antenna flange (receiver plate) |

- Assemble the coaxial coupler to the flange of the receiver plate with the lock washer and jam nut, and tighten the jam nut by hand (Figure 156).
- Assemble the RTK antenna onto the upper fitting of the coaxial coupler, and tighten the knurl nut of the antenna by hand (Figure 157).

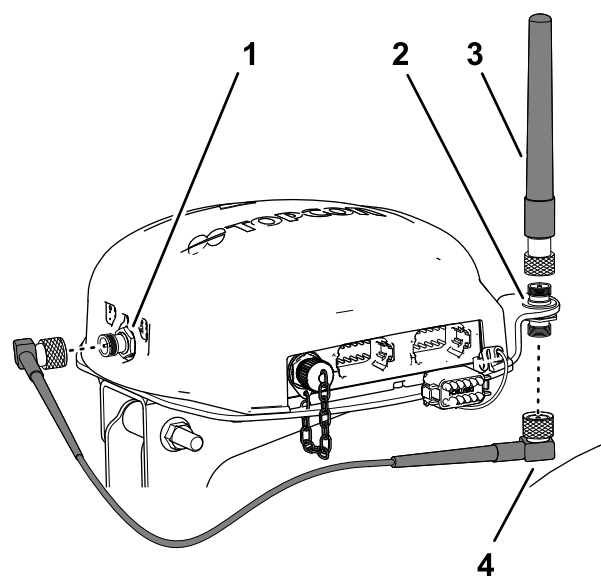


Figure 157

- | | |
|---|------------------|
| 1. Coaxial connector (CDMA or GSM cellular modem) | 3. RTK-antenna |
| 2. Coaxial coupler | 4. Antenna cable |

- Loosely assemble the antenna cable to the lower fitting of the coaxial coupler (Figure 157).
- Route the cable around the back of the navigation receiver to the coaxial connector of the CDMA or GSM cellular modem (Figure 157).

6. Assemble the antenna cable to coaxial connector of the CDMA or GSM cellular modem (Figure 157).
7. Tighten the knurl nuts of the of the antenna cable by hand.

30

Installing the Sprayer Monitor

Parts needed for this procedure:

1	Monitor mount
3	Flange-head bolt (6 x 12 mm)
2	U-bolt (5/16 inch)
8	Flange locknut (5/16 inch)
1	Ball mount
4	Flange-head bolt (5/16 x 3/4 inch)
1	Monitor—X25 GeoLink Precision Spray System Kit, Base, WAAS (Model 41630)
1	Monitor Arm—X25 GeoLink Precision Spray System Kit, Base, WAAS (Model 41630)

Removing the Steering Wheel

1. Mark the position of the steering wheel to the steering valve with a piece of tape (Figure 158).

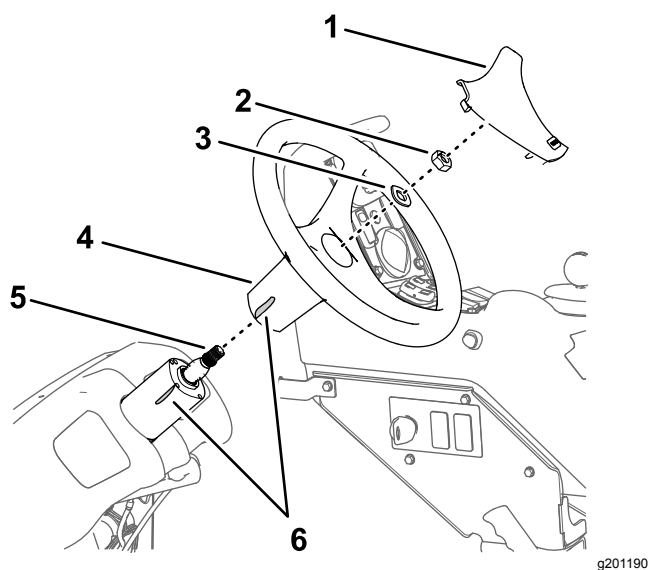


Figure 158

1. Steering-wheel cover
2. Nut (5/8 inch)
3. Washer (5/8 inch)
4. Steering wheel
5. Shaft (steering valve)
6. Tape

2. Remove the cover from the steering wheel (Figure 158).
3. Remove the nut (5/8 inch) and washer (5/8 inch) that secure the steering wheel to the steering valve, and remove the steering wheel (Figure 158).

Installing the Monitor Mount

1. Align the monitor mount to the machine as shown in Figure 159.

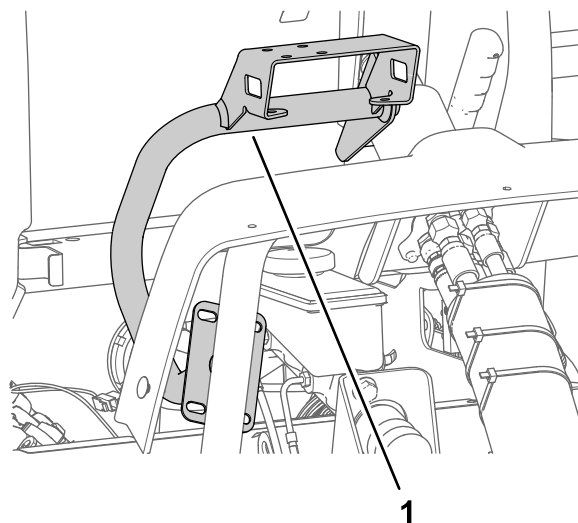


Figure 159

1. Monitor mount

2. Assemble the monitor mount to the housing of the steering valve (Figure 160) with the 3 flange-head bolts (6 x 12 mm).

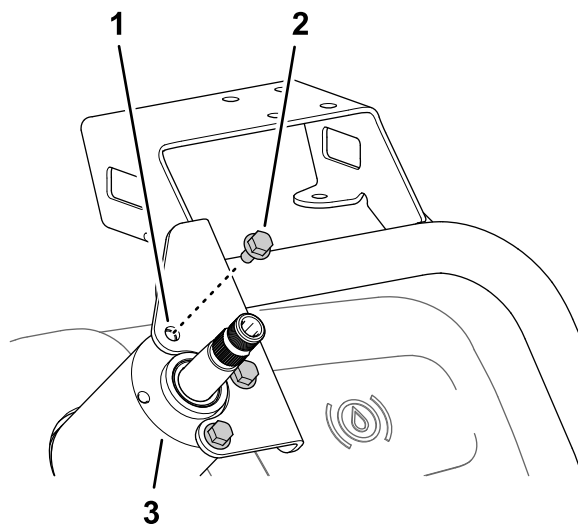


Figure 160

1. Monitor mount
2. Flange-head bolt (6 x 12 mm)
3. Housing (steering valve)

3. Assemble the plate of the monitor mount to the support tube of the machine chassis ([Figure 161](#)) with the 2 U-bolts and 4 flange locknuts (5/16 inch).

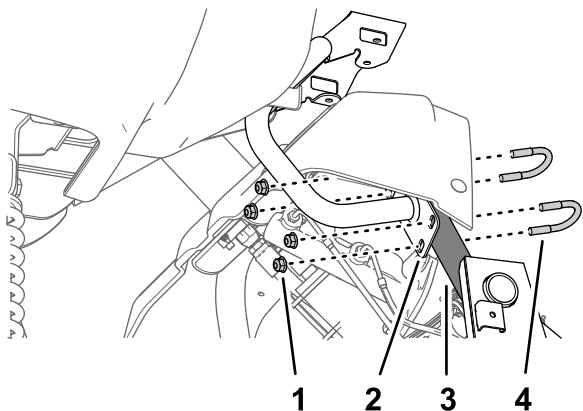


Figure 161

- | | |
|-------------------------------|-----------------------------------|
| 1. Flange locknut (5/16 inch) | 3. Support tube (machine chassis) |
| 2. Plate (monitor mount) | 4. U-bolt (5/16 inch) |

4. Torque the 3 flange-head bolts (6 x 12 mm) at the steering valve to 972 to 1198 N·cm (86 to 106 in-lb); At the support tube, torque the flange locknuts to 1978 to 2542 N·cm (175 to 225 in-lb).

Installing the Steering Wheel

1. Align the tape mark on the steering wheel to the tale mark on the housing of the steering valve ([Figure 162](#)).

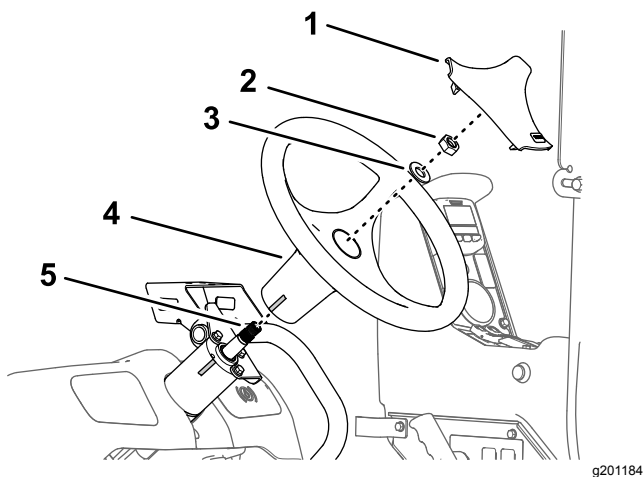


Figure 162

- | | |
|-------------------------|---------------------------|
| 1. Steering-wheel cover | 4. Steering wheel |
| 2. Nut (5/8 inch) | 5. Shaft (steering valve) |
| 3. Washer (5/8 inch) | |

2. Assemble the steering wheel onto the shaft of the steering valve ([Figure 162](#)) with the washer (5/8 inch) and nut (5/8 inch) that you removed in

step 3 of [Removing the Steering Wheel \(page 74\)](#).

3. Torque the nut to 206 to 254 N·m (152 to 188 ft-lb).
4. Install the cover that you removed in step 2 of [Removing the Steering Wheel \(page 74\)](#) onto the steering wheel ([Figure 168](#)).

Installing the Sprayer Monitor to the Mount

1. Assemble the ball mount to the bracket for the monitor mount ([Figure 163](#)) with the 4 flange-head bolts (5/16 x 3/4 inch) and 4 flange locknuts (5/16 inch).

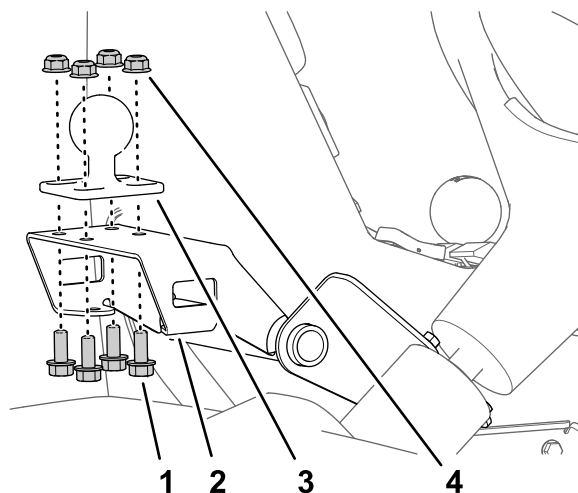


Figure 163

- | | |
|---------------------------------------|-------------------------------|
| 1. Bracket (monitor mount) | 3. Ball mount |
| 2. Flange-head bolt (5/16 x 3/4 inch) | 4. Flange locknut (5/16 inch) |

2. Torque the bolts and nuts to 1978 to 2542 N·cm (175 to 225 in-lb).
3. Assemble the ball fitting of the monitor and the ball mount on the machine to the monitor arm ([Figure 164](#)).

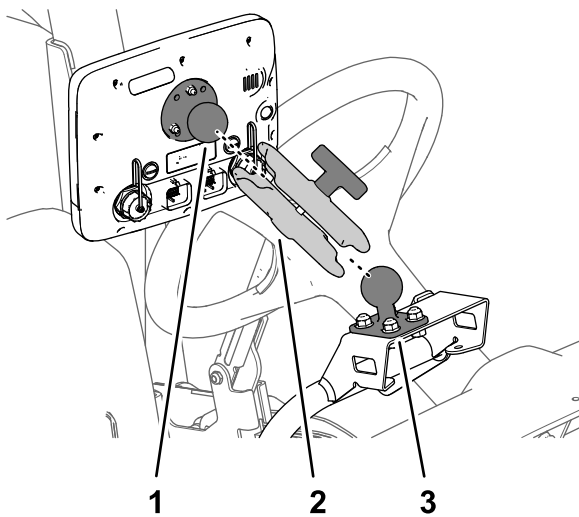


Figure 164

g201183

1. Ball fitting (monitor)
2. Monitor arm
3. Ball mount

4. Adjust the monitor so that it is viewable from the machine operator's position and tighten the knob of the monitor arm by hand (Figure 164).

31

Wiring the Spray Pump Clutch

No Parts Required

Procedure

1. Disconnect the 2-socket connector of the machine wire harness labeled SPRAY PUMP COIL from the 2-pin connector of the alternator (Figure 165).

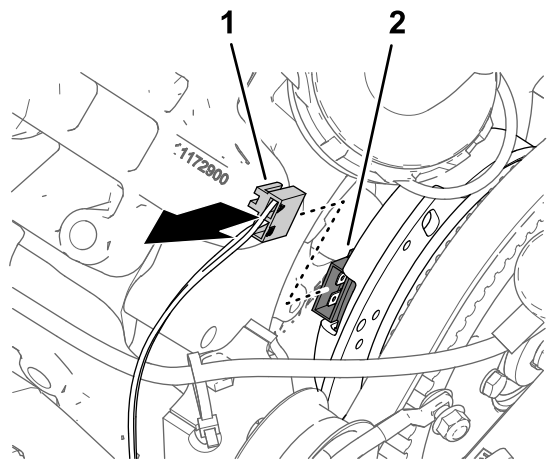


Figure 165

g198155

1. 2-socket connector—machine wire-harness (PUMP CLUTCH)
2. 2-pin connector (alternator)

2. Connect the 2-pin connector of the kit wire-harness branch—84 cm (33 inches) labeled PUMP CLUTCH into the 2-socket connector of the machine wire-harness labeled SPRAY PUMP COIL (Figure 166).

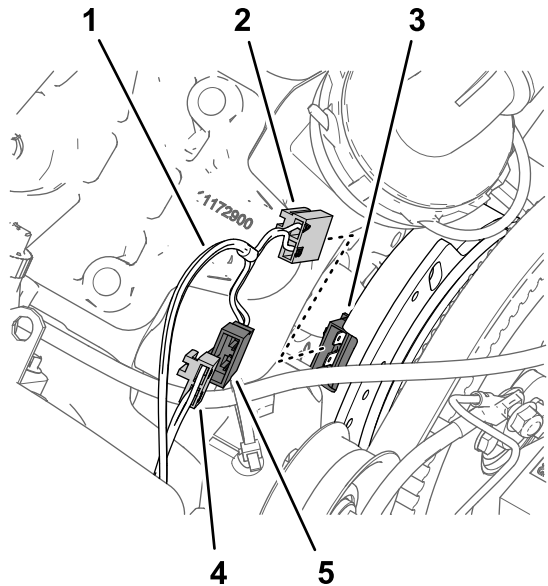


Figure 166

g198144

1. Kit wire-harness branch—84 cm (33 inches)
2. 2-socket connector—kit wire-harness (PUMP CLUTCH)
3. 2-pin connector (alternator)
4. 2-socket connector—machine wire-harness (SPRAY PUMP COIL)
5. 2-pin connector—kit wire-harness (PUMP CLUTCH)

3. Connect the 2-socket connector of the kit wire-harness labeled PUMP CLUTCH into the 2-pin connector of the alternator (Figure 166).
4. Route the wire-harness branch—84 cm (33 inches) against the engine and spray pump so that the harness has clearance from the alternator belt (Figure 167).

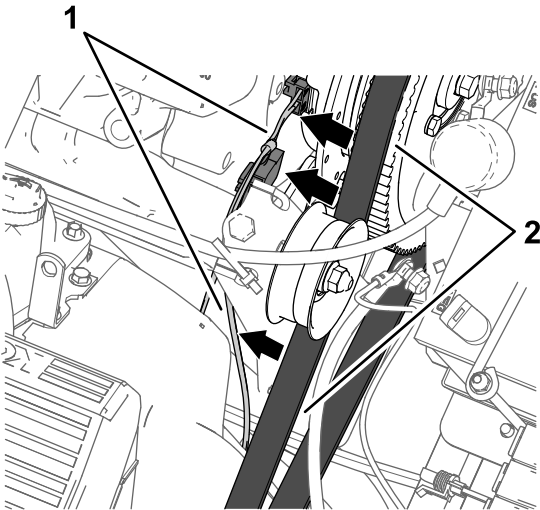


Figure 167

1. Wire-harness branch—84 cm (33 inches)
2. Alternator belt

32

Installing Components for the Sprayer Electrical System

Parts needed for this procedure:

1	Battery bracket
1	Bolt (5/16 x 1-3/4 inches)
1	Washer (5/16 inch)
1	Battery (540 A)
1	Battery retainer
1	Flange locknut (5/16 inch)
1	Alternator bracket
1	Drive pulley 279 mm (11 inch)
4	Bolt (1/4 x 2-1/4 inches)
4	Lock washer (1/4 inch)
1	Alternator (60 A)
1	Flange-head bolt (8 x 25 mm)
1	Flange-head bolt (3/8 x 1-1/2 inches)
1	V-belt

Removing the Battery (300 A) and Battery Bracket

1. Remove the 2 flange locknuts and hold-down rod from the 2 J-bolts that secure the battery to the battery bracket of the machine (Figure 168).

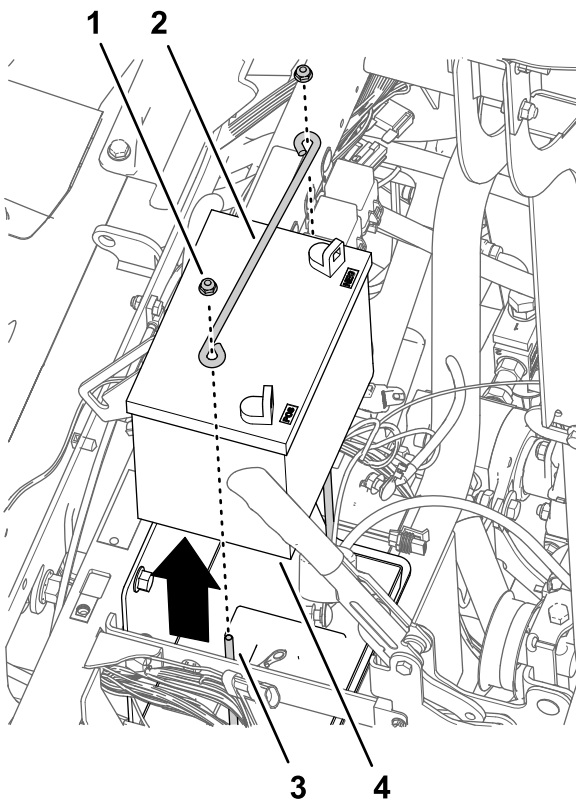


Figure 168

- | | |
|------------------------------|--------------------|
| 1. Flange locknut (1/4 inch) | 3. J-bolt |
| 2. Hold-down rod | 4. Battery (300 A) |

2. Remove the battery from the machine ([Figure 168](#)).

Note: You no longer need the flange nuts, hold-down rod, and battery (300 A).

3. Remove the bolts (10-24 x 3/4 inch) and nuts (10-24) that secure the fuse blocks to the battery bracket ([Figure 169](#)).

Note: Retain the bolts (10-24 x 3/4 inch) and nuts (10-24) for installation in [Installing the Battery Bracket and Battery \(540 A\)](#) (page 79).

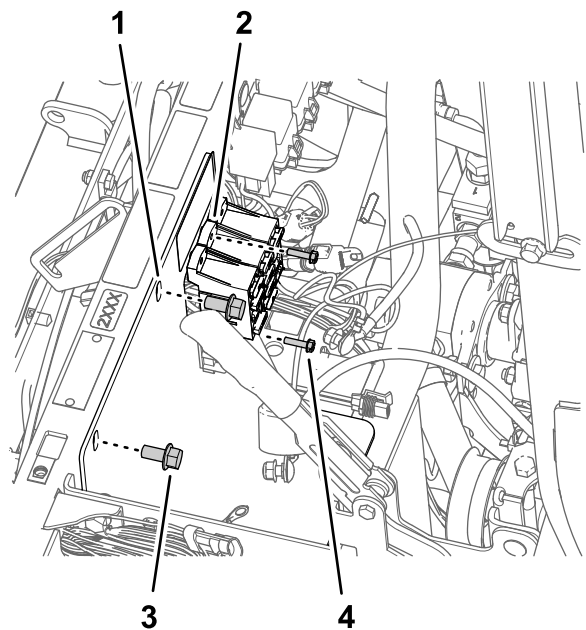



Figure 169

- | | |
|------------------|--------------------------------------|
| 1. Bold-down rod | 3. Flange-head bolt (3/8 x 3/4 inch) |
| 2. Fuse block | 4. Bolt (10-24 x 3/4 inch) |

4. Remove the 2 flange-head bolts (3/8 x 3/4 inch) that battery bracket to the shock-support tube of the machine ([Figure 169](#)).

Note: Retain the flange-head bolt (3/8 x 3/4 inch) for installation in [Installing the Battery Bracket and Battery \(540 A\)](#) (page 79).

5. Remove the 2 J-bolts and battery tray from the battery bracket ([Figure 170](#)).

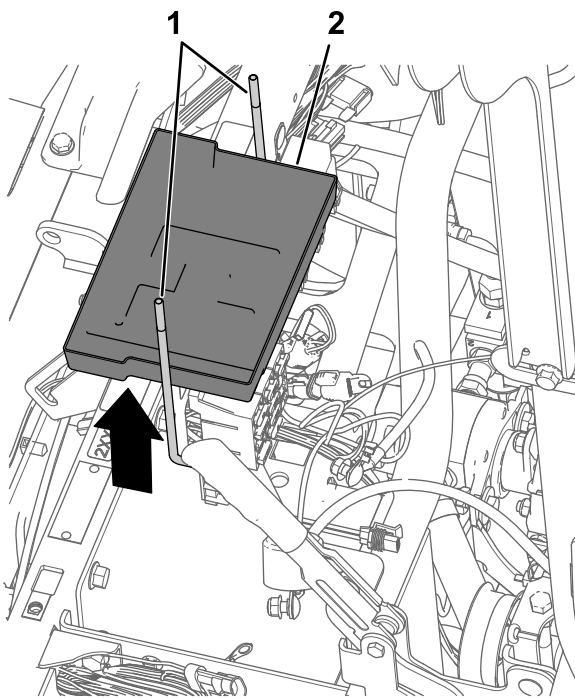


g201187

Figure 170

1. J-bolt
2. Battery tray

6. Remove the battery bracket from the machine ([Figure 171](#)).

Note: You no longer need the J-bolts, battery tray, and battery bracket.

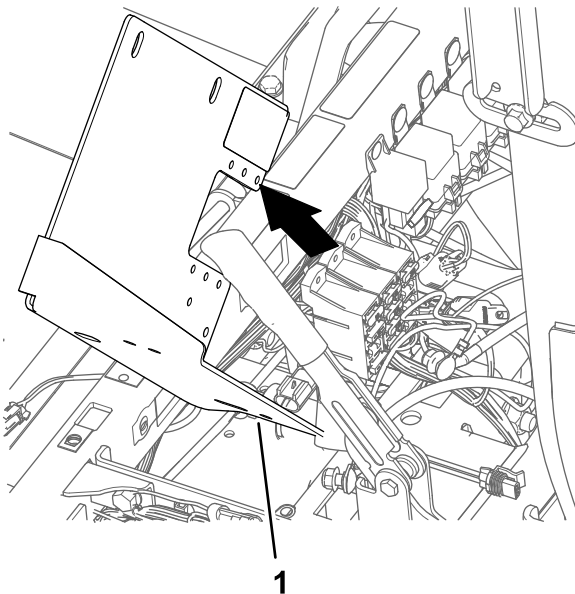


g201186

Figure 171

1. Battery bracket

Installing the Battery Bracket and Battery (540 A)

1. Align the new battery bracket to the shock-support tube of the machine and the fuse blocks ([Figure 172](#)).

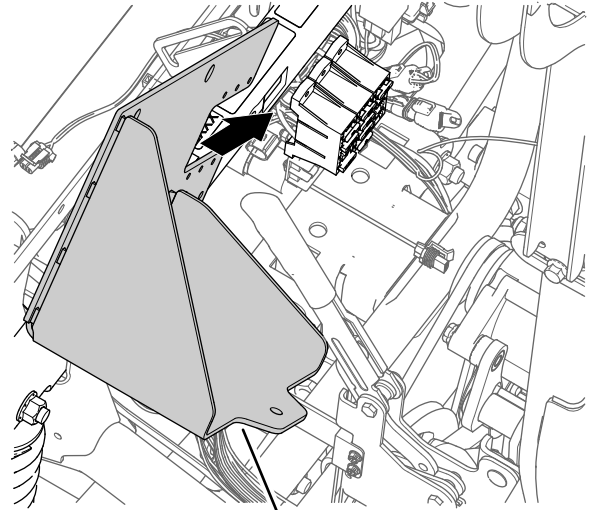

g201177

Figure 172

1. Battery bracket
2. Assemble the battery bracket to the shock-support tube ([Figure 173](#)) with the 2 flange-head bolt (3/8 x 3/4 inch) that you retained in step 4 of [Removing the Battery \(300 A\) and Battery Bracket](#) (page 77).

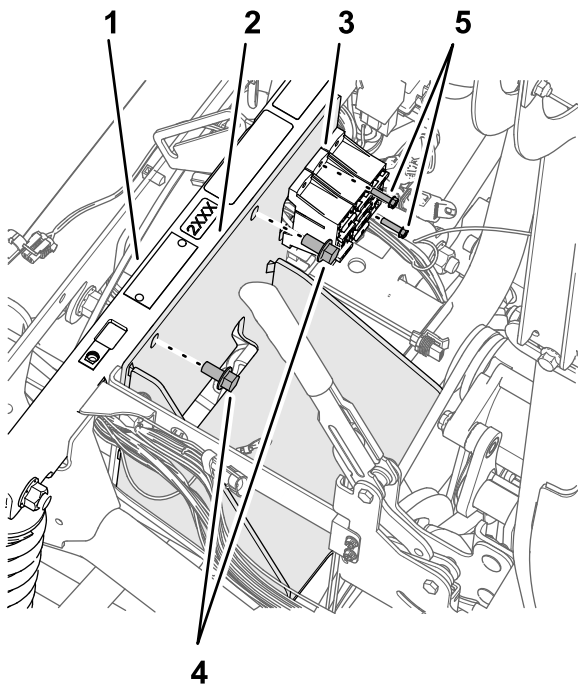


Figure 173

g201178

1. Shock-support tube
2. Battery bracket
3. Fuse block
4. Bolt (10-24 x 3/4 inch)
5. Flange-head bolt (3/8 x 3/4 inch)

3. Torque the flange head bolts to 37 to 45 N·m (27 to 33 ft-lb).
4. Secure the fuse blocks to the battery bracket ([Figure 173](#)) with the bolt (10-24 x 3/4 inch) and nuts (10-24) that you removed in step 3 of [Removing the Battery \(300 A\) and Battery Bracket](#) (page 77).
5. Assemble the battery to the battery bracket with the bolt (5/16 x 1-3/4 inches), washer (5/16 inch), battery retainer, and flange locknut (5/16 inch) as shown in [Figure 174](#).

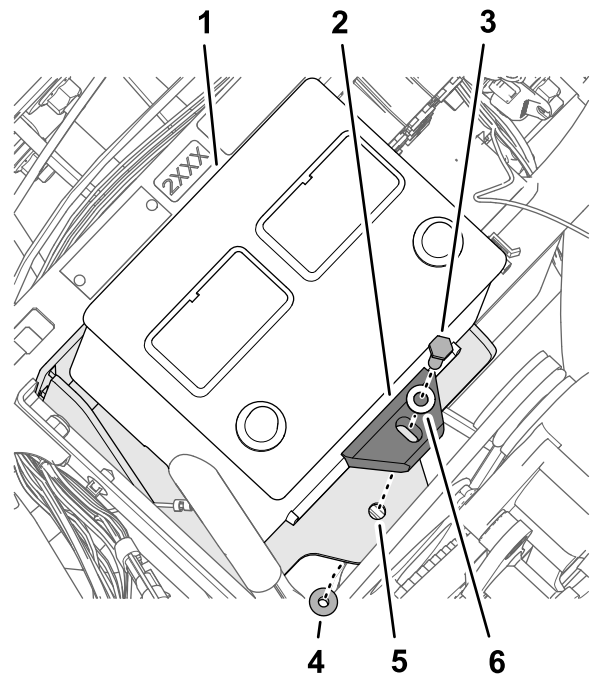


Figure 174

g201182

1. Battery (540 A)
 2. Battery retainer
 3. Bolt (5/16 x 1-3/4 inches)
 4. Flange locknut (5/16 inch)
 5. Battery bracket
 6. Washer (5/16 inch)
6. Torque the bolt and nut to 1978 to 2542 N·cm (175 to 225 in-lb).

Installing the Alternator Bracket

1. At the pump head located at 11 o'clock position, loosen the 2 bolts as shown [Figure 175](#) to provide a 7 to 10 mm (1/4 to 3/8 inch) gap between the head of the bolts and the pump.

Note: You do not need to remove the bolts from the spray pump.

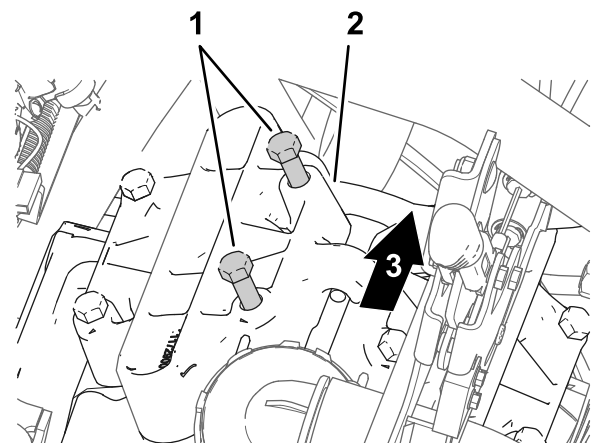


Figure 175

g201308

1. Bolts (pump head)
2. Pump head (11 o'clock position)
3. Back of the machine

- Align the alternator bracket between the bolts that you loosened and as shown in step 1 and the pump head [Figure 176](#).

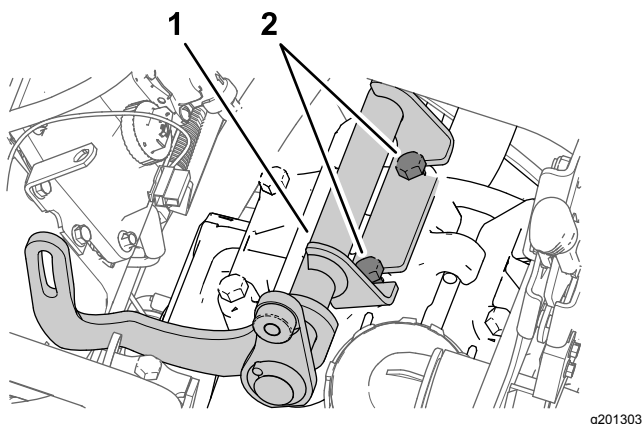


Figure 176

- Alternator bracket
- Bolts (pump head)

- Torque the bolts to 61 to 75 N (45 to 55 ft-lb).

Installing the Drive Pulley

- Loosen the nut for the idler-pulley shaft ([Figure 177](#)).

Note: Ensure that there is no belt tension.

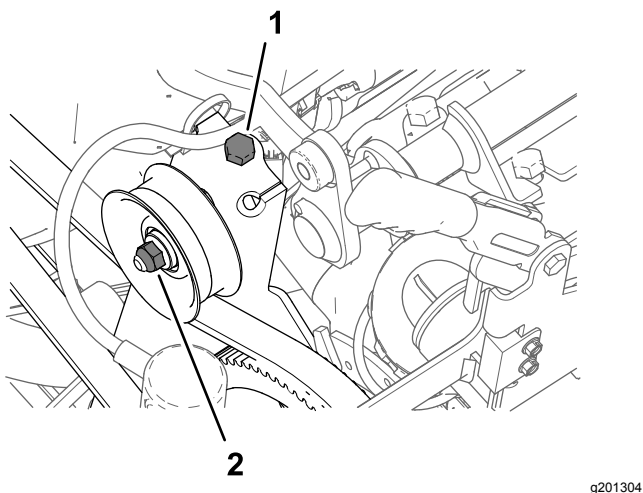


Figure 177

- Belt-tension bolt (machine)
- Nut (idler-pulley shaft)

- Rotate the belt-tension bolt to remove all tension from the sprayer-pump belt ([Figure 177](#)).
- Remove the 4 bolts (1/4 x 1 inch) and 4 lock washers (1/4 inch) that secure the pulley to the sprayer pump ([Figure 178](#)).

Important: Do not remove the pulley.

Note: You no longer need the bolts and lock washers.

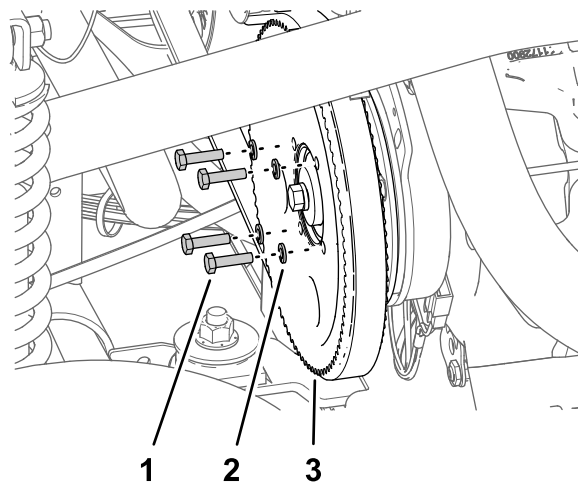


Figure 178

- Bolt (1/4 x 1 inch)
- Lock washer (1/4 inch)
- Pulley (sprayer pump)

- Align the holes in the pulley for the alternator (kit) with the holes in the pulley for the sprayer pump ([Figure 179](#)).

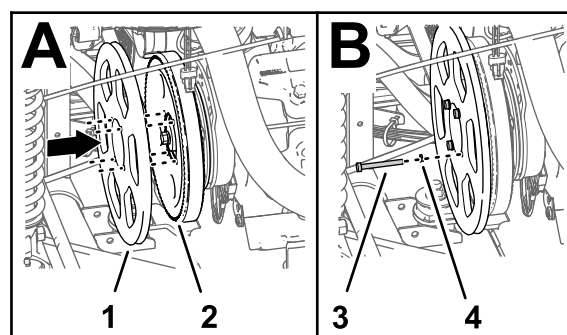


Figure 179

- Drive pulley 279 mm (11 inch)
- Pulley (sprayer pump)
- Bolt (1/4 x 2-1/4 inches)
- Lock washer (1/4 inch)

- Assemble the alternator pulley to the sprayer-pump pulley and sprayer pump with the 4 bolt (1/4 x 2-1/4 inches) and 4 lock washers (1/4 inch).
- Torque the bolts to 1017 to 1243 N·m (90 to 110 in-lb).
- Rotate the belt-tension bolt to increase the tension of the belt until you measure belt 9.5 mm (3/8 inch) of belt deflection when you apply 4.5 kg (10 lb) halfway between the engine and spray pump sprockets.

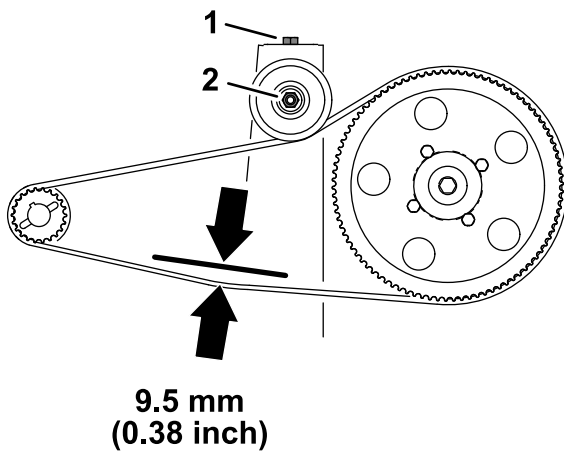


Figure 180

g201360

1. Belt-tension bolt (machine) 2. Nut (idler-pulley shaft)

8. Tighten the nut for the idler-pulley shaft to 37 to 44 N·m (27 to 33 ft-lb).

Installing the Alternator

1. Assemble the alternator (60 A) to the threaded boss of the alternator-bracket (Figure 181) with the flange-head bolt (3/8 x 1-1/2 inches).

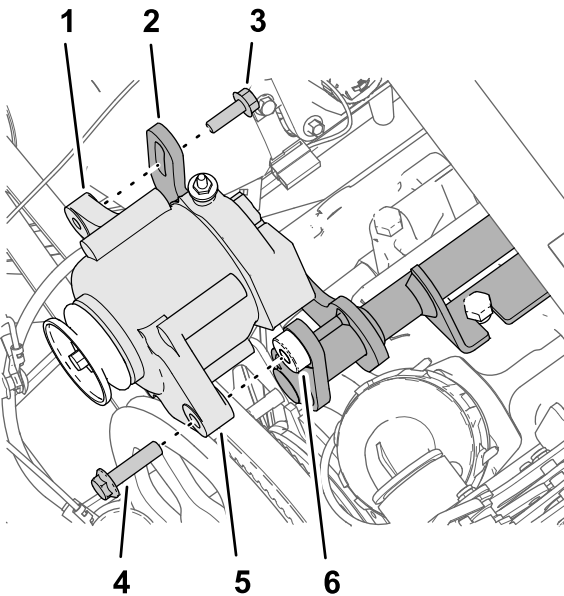


Figure 181

g201413

- | | |
|---|---|
| 1. Threaded flange (8 mm)—alternator (60 A) | 4. Flange-head bolt (3/8 x 1-1/2 inches) |
| 2. Slotted flange (alternator bracket) | 5. Flange (10 mm (3/8 inch) hole)—alternator (60 A) |
| 3. Flange-head bolt (8 x 25 mm) | 6. Threaded boss (3/8-16)—alternator-bracket |

2. Assemble the threaded flange of the alternator to the slotted flange of the alternator bracket

(Figure 181) with the flange-head bolt (8 x 25 mm).

3. Assemble the V-belt over the drive pulley 279 mm (11 inch) and the pulley of the alternator (Figure 182).

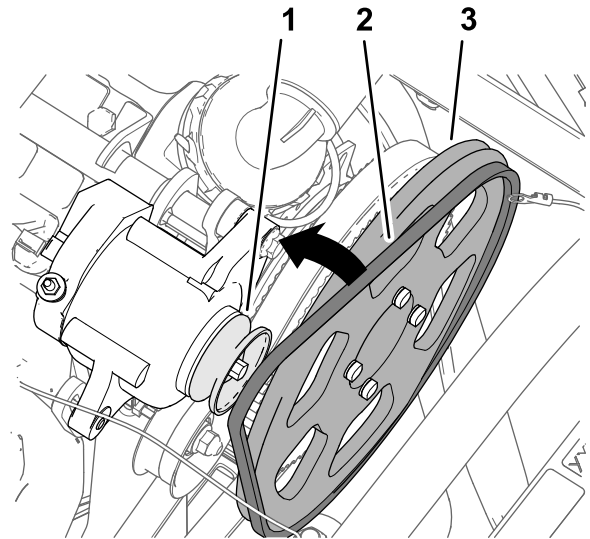


Figure 182

g201412

1. Pulley (Alternator—60 A) 3. Drive pulley 279 mm (11 inch)
2. V-belt

4. Rotate the alternator (Figure 183) up to increase tension on the belt until you measure belt 9.5 mm (3/8 inch) of belt deflection when you apply 4.5 kg (10 lb) halfway between the alternator pulley and drive pulley 279 mm (11 inch).

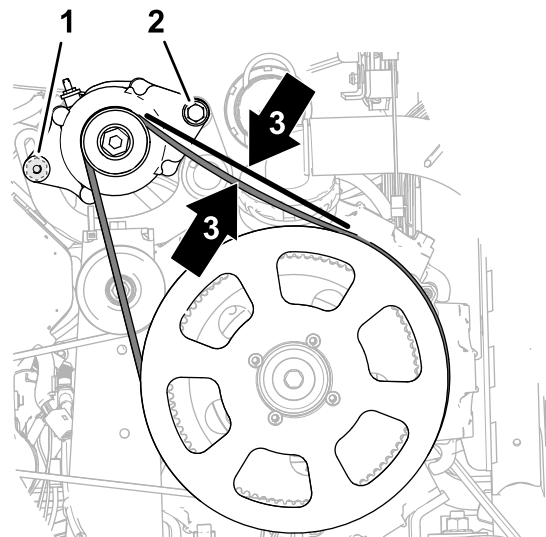


Figure 183

g201701

1. Flange-head bolt (8 x 25 mm) 3. Belt deflection 9.5 mm (3/8 inch)
2. Flange-head bolt (3/8 x 1-1/2 inches)

5. Torque the flange-head bolt (8 x 25 mm) to 23 to 29 N·m (17 to 21 ft-lb).
6. Torque the flange-head bolt (3/8 x 1-1/2 inches) to 37 to 45 N·m (27 to 33 ft-lb).

33

Connecting the Kit Wire Harness at the Seat Base

Parts needed for this procedure:

1	Relay
1	Push-in fastener
1	Fuse (15 A)
1	Fuse (50 A)

Connecting the Alternator (50 A)

1. Connect the 2-socket at the end of the pink wire 57 cm (23-1/2 inches) of the kit wire harness (Figure 184) onto the 2-pin connector of the alternator (50 A).

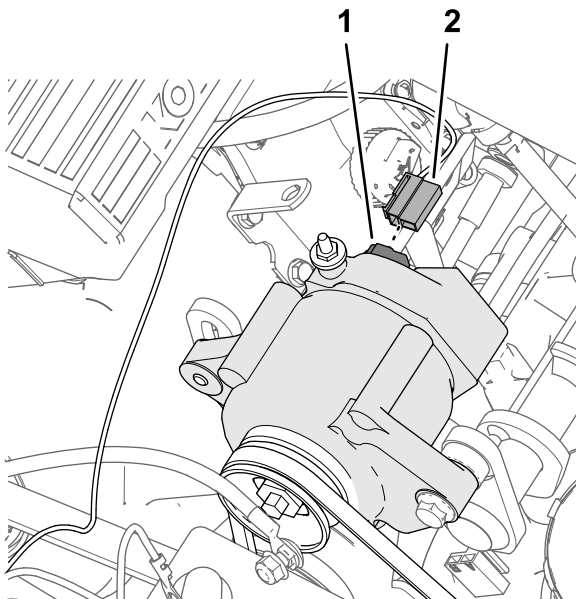


Figure 184

1. 2-pin connector—alternator (50 A)
2. 2-socket connector—sense wire, pink 57 cm (23-1/2 inches)

2. Route the pink sense wire away from the alternator belts and secure the wire with a cable tie.
3. Remove the nut from the terminal post (Figure 185) of the alternator (50 A).


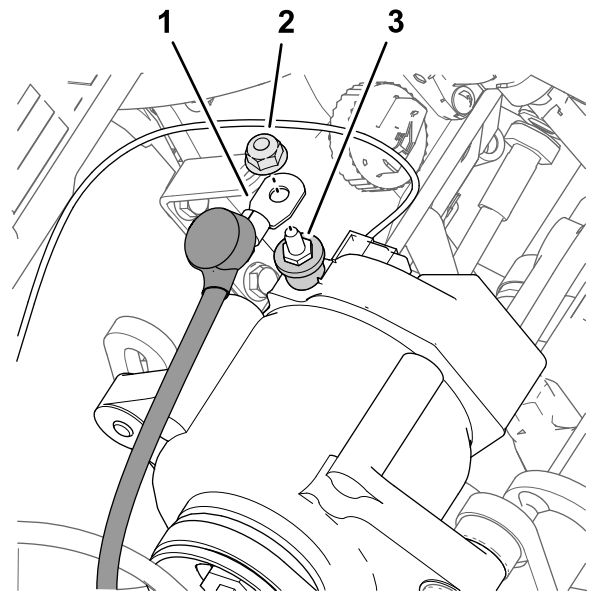


Figure 185

1. Alternator wire (red—6 gauge)
2. Nut
3. Terminal post—alternator gauge (50 A)
4. Assemble the red, 6 gauge alternator wire onto the terminal post of the alternator (50 A) with the nut (Figure 185).
5. Route the red alternator toward the battery posts and away from the pulley and alternator belt.
6. Torque the nut to 47 to 57 N·m (34 to 42 ft-lb).
7. Slit the insulator cover over the terminal post of the alternator (Figure 185).

Connecting the ASC 10 Enable Relay

1. Connect the 5-pin connector of the relay into the 5-socket connector (Figure 186) of the kit wire harness labeled ASC 10 ENABLE RELAY.

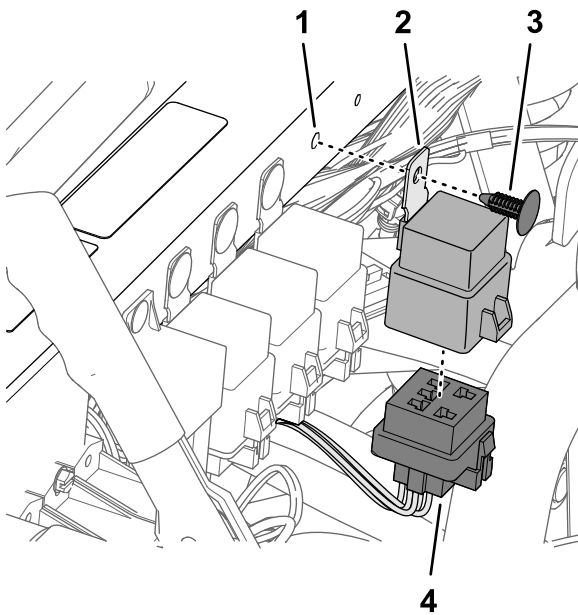

g202182


Figure 186

- | | |
|------------------------------|---|
| 1. Hole (shock-support tube) | 3. Push-in fastener |
| 2. Relay | 4. 5-socket connector (ASC 10 ENABLE RELAY) |

- Align the hole in the mounting tab of the relay with the hole in the shock-support tube, and secure the relay to the tube with a push-in fastener (Figure 186).

Connecting the Fuse Blocks

- Set a multi-meter for performing a continuity test.
- At fuse block 3 of the machine, insert the multi-meter probe into contact 4 (the right column) of fuse-socket 2 as shown in Figure 187.

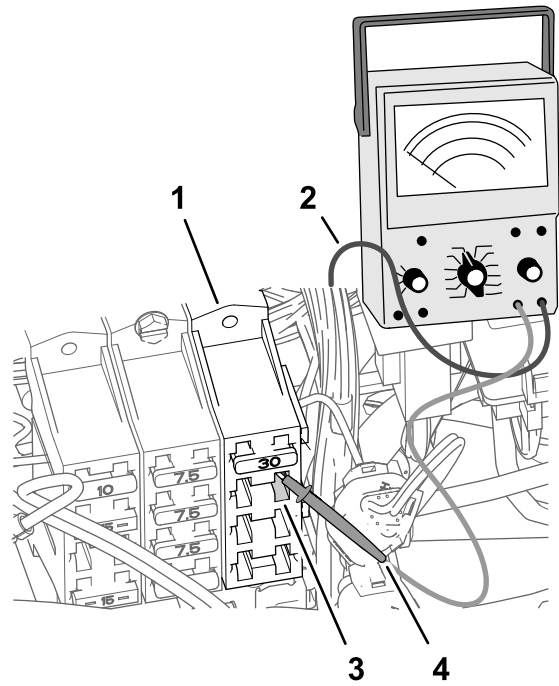

g202178

Figure 187

- | | |
|---------------------------|---|
| 1. Fuse block 3 (machine) | 3. Fuse-socket 2—contact 4 (right column) |
| 2. Multi-meter lead | 4. Multi-meter probe |

- At the front side of the fuse blocks, use the other multi-meter probe to identify the blade connector at the end of the red 10-gauge wire that connects to fuse-socket 2—contact 4.

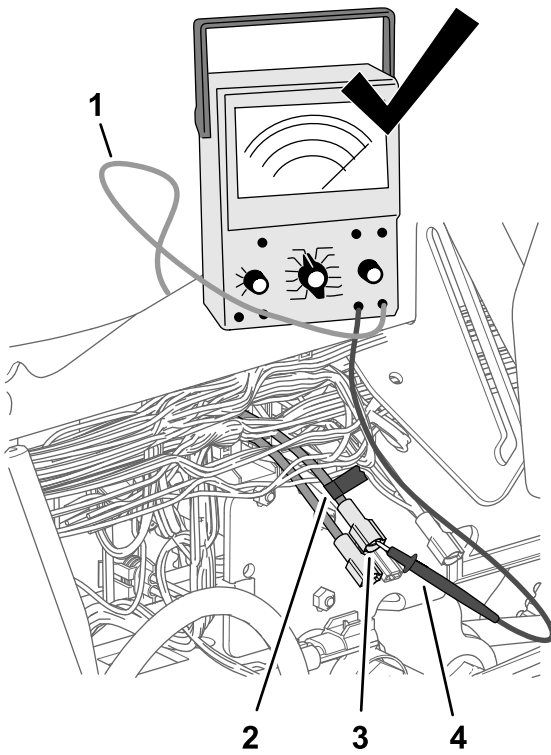


Figure 188

g202179

1. Multi-meter lead
2. Tape
3. Blade connector (red 10-gauge wire)
4. Multi-meter probe

4. Use a piece of tape to mark the connector and wire that you identified in step 3 ([Figure 188](#)).
5. Connect the blade connector that you marked in step 4 into the socket connector at the end of the pink wire 51 mm (2 inches) of the kit wire harness ([Figure 189](#)).

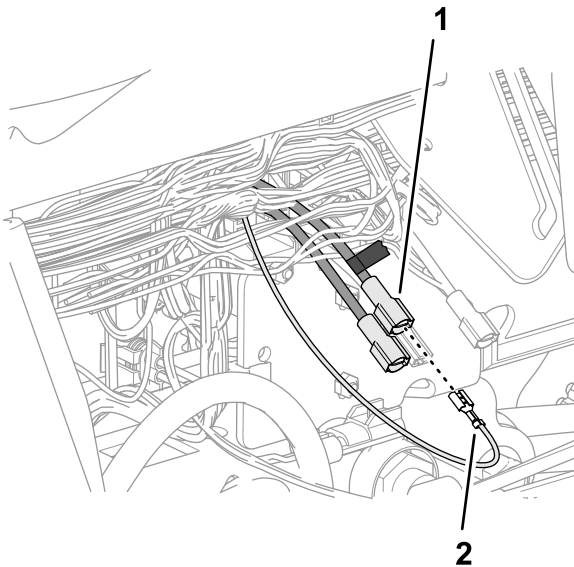


Figure 189

g202177

1. Marked blade connector (red 10-gauge wire)
2. Socket connector—pink wire 51 mm (2 inches)

6. Insert the fuse (15 A) into fuse-socket 2 of fuse block 3 until the fuse is fully seated ([Figure 190](#)).

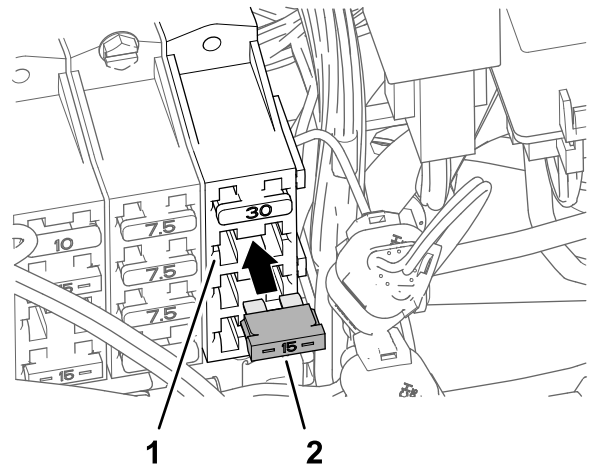


Figure 190

g202180

1. Fuse-socket 2 (fuse block 3)
2. Fuse (15 A)

7. Insert the fuse (50 A) into inline-fuse block until the fuse is fully seated ([Figure 191](#)).

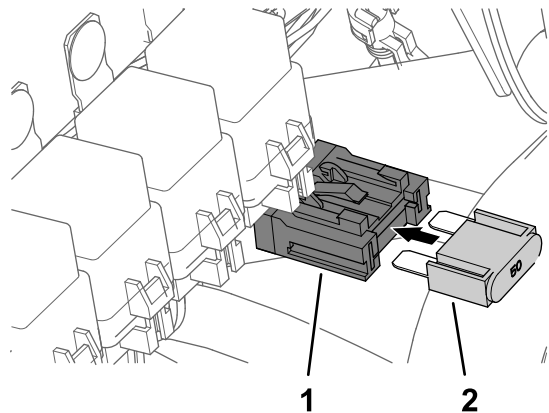


Figure 191

g202183

1. Inline-fuse block
2. Fuse (50 A)

34

Installing the Wire Harnesses for the Navigation Components

Parts needed for this procedure:

1	Data Harness (navigation system)—GeoLink precision-spray-system kit (Model 41630)
1	Battery Harness (navigation system)—GeoLink precision-spray-system kit (Model 41630)
8	Cable tie
1	Quick-connect clamp (red handle)
1	Quick-connect clamp (black handle)

Connecting the Navigation-Data and Electrical Harnesses

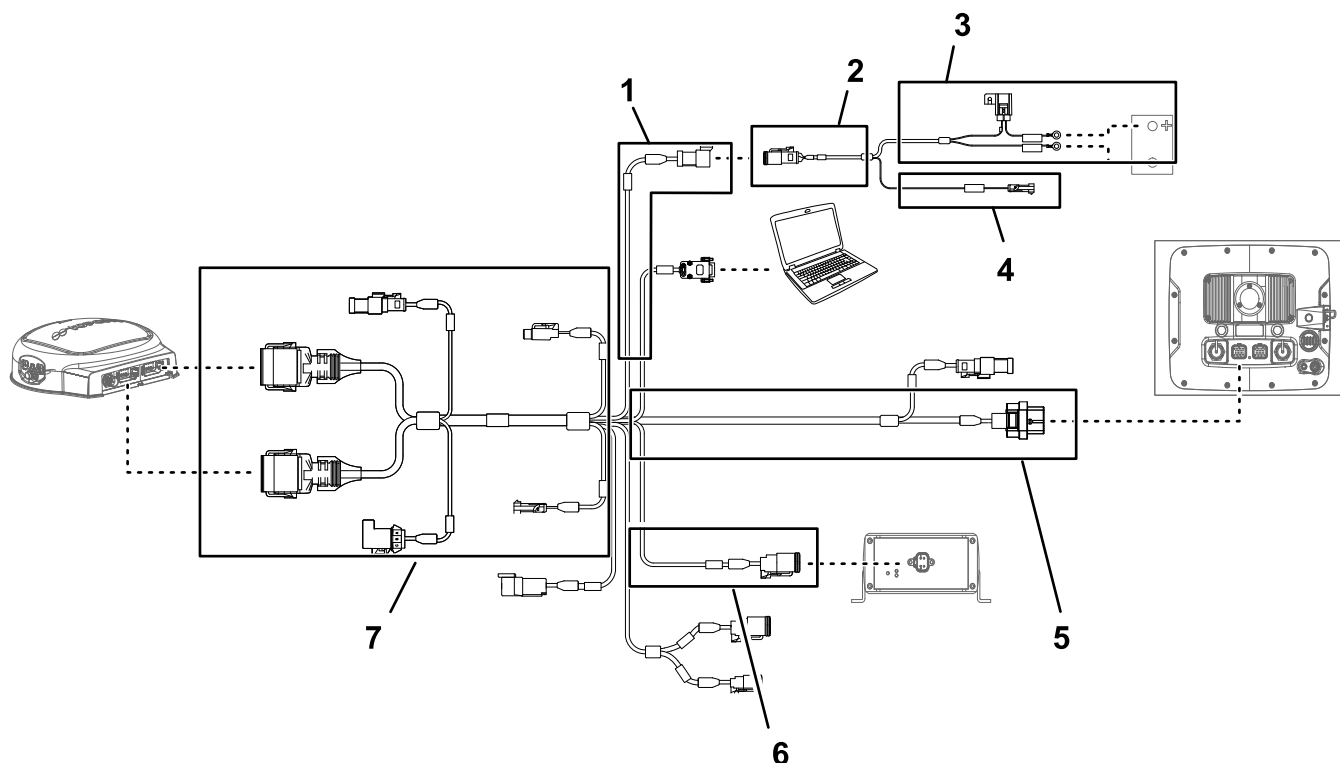


Figure 192

g203663

- | | | |
|--|--|---|
| 1. 100 cm (39-3/8 inch) data-harness branch (electrical power) | 4. 100 cm (39-3/8 inch) battery-harness branch (switched power) | 7. 220 cm (86-5/8 inch) data-harness branch (sprayer monitor) |
| 2. 100 cm (39-3/8 inch) battery-harness branch | 5. 390 cm (153-1/2 inch) data-harness branch (navigation receiver) | |
| 3. 220 cm (86-5/8 inch) battery-harness branch | 6. 13 cm (5-1/16 inch) data-harness branch (kit harness interface) | |

Important: Some connectors of the data harness are not used. Ensure that the caps and plugs of the unused connectors are secure.

Connect the 3-socket connector (electrical-power interface) of the navigation-electrical harness to the 3-pin connector (electrical-power interface) of the data harness (Figure 192).

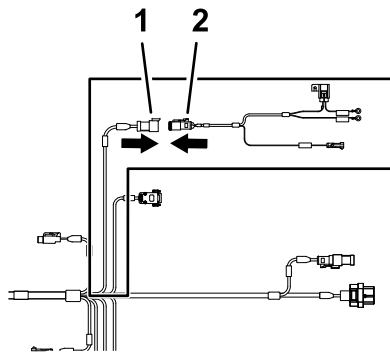


Figure 193

g202247

1. 3-pin connector—data harness (SYSTEM POWER SEPARATION)
2. 3-socket connector—battery harness (electrical-power interface)

Routing and Connecting the Data Cable to the Navigation Receiver

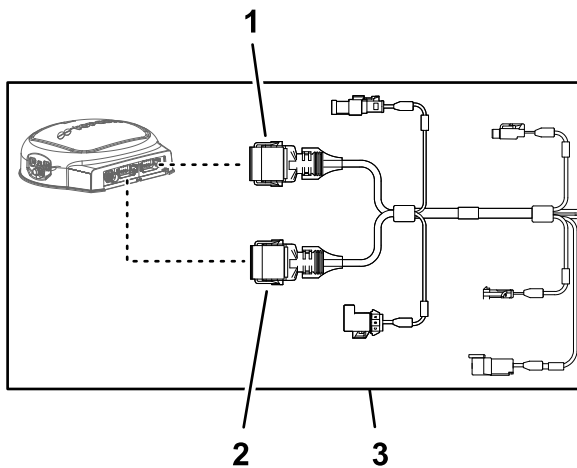


Figure 194

g203668

1. 12-socket connector (gray) data harness (navigation receiver)
2. 12-socket connector (black) data harness (navigation receiver)
3. 390 cm (153-1/2 inch) data-harness branch (navigation receiver)

1. Route the 390 cm (153-1/2 inch) branch of the data-harness along the back side of the left, vertical roll-bar tube.

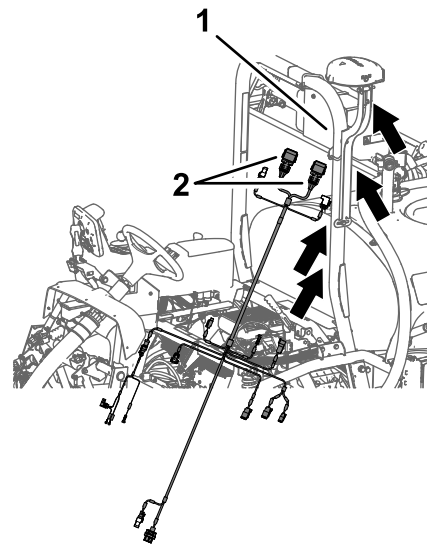


Figure 195

g202268

1. Left, vertical roll-bar tube
 2. 12-socket connectors—390 cm (153-1/2 inch) data-harness branch
-
2. Route the 390 cm (153-1/2 inch) branch of the data harness along the right ROPS tube with the 12-socket connector (gray) and 12-socket connector (black) up toward the navigation receiver (Figure 196).

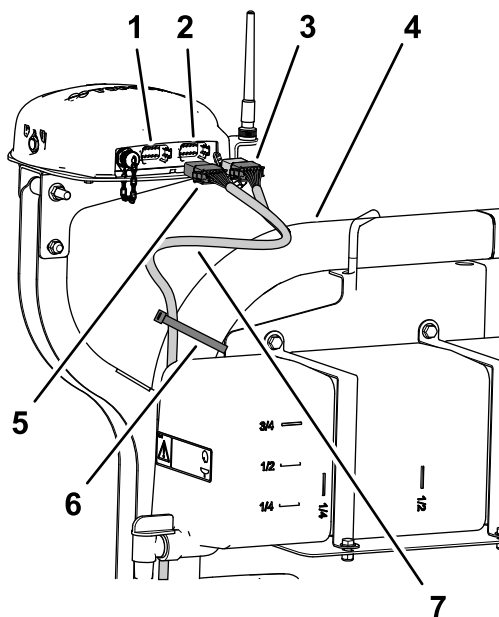


Figure 196

- | | |
|---|--|
| 1. 12-pin connector left (gray)—navigation receiver | 5. 12-socket connector (gray/black)—data harness |
| 2. 12-pin connector right (black)—navigation receiver | 6. Cable tie |
| 3. 12-socket connector (black)—data harness | 7. 390 cm (153-1/2 inch) data-harness branch |
| 4. Roll bar | |

3. Align the 2 keys at the long face of the gray and black 12-socket connector of the data harness with the 2 key slots in the bottom, horizontal wall of the left (gray) 12-pin connector of the navigation receiver ([Figure 197](#)).

Note: Use caution when connecting wire harness to the navigation receiver; the alignment keys of the harness connectors are unique to the keyways of the pin connectors of the navigation receiver.

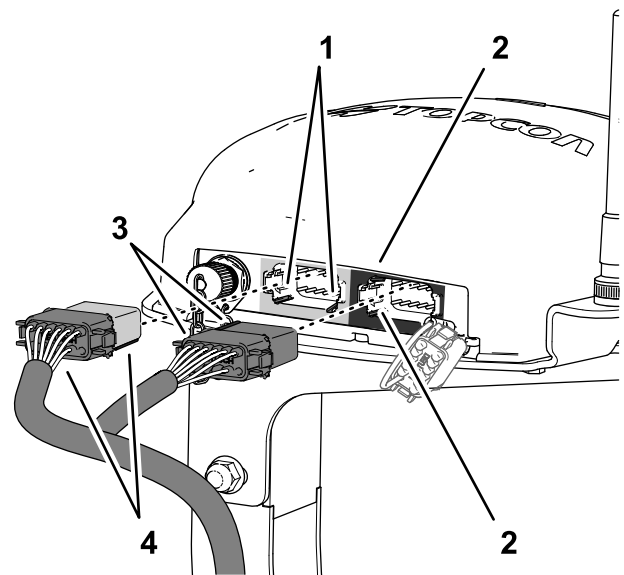


Figure 197

- | | |
|---|---|
| 1. Key slots—bottom, horizontal wall (left (gray) 12-pin connector—navigation receiver) | 3. Alignment keys—short face (black 12-socket connector—data harness) |
| 2. Key slots—left, vertical wall (right (black) 12-pin connector—navigation receiver) | 4. Alignment keys—long face (gray/black 12-socket connector—data harness) |

4. Connect the gray and black 12-socket connector of the data harness into the left (gray) 12-pin connector of the navigation receiver until the connector locks snap together securely ([Figure 197](#)).
5. Align the 2 keys at the short side of the black 12-socket connector of the data harness with the 2 key slots in the left, vertical wall of the right (black) 12-pin connector of the navigation receiver ([Figure 197](#)).

Note: Use caution when connecting wire harness to the navigation receiver; the alignment keys of the harness connectors are unique to the keyways of the pin connectors of the navigation receiver.

6. Connect the black only 12-socket connector of the data harness into the left (black) 12-pin connector of the navigation receiver until the connector locks snap together securely ([Figure 197](#)).
7. Secure the 390 cm (153-1/2 inch) branch of the data harness to the right ROPS tube with 2 cable ties as shown in [Figure 196](#).

Note: Ensure that the cable is slack between the 12-socket connectors and the cable tie.

Routing the Navigation-Electrical Harness at the Right Side of the Machine

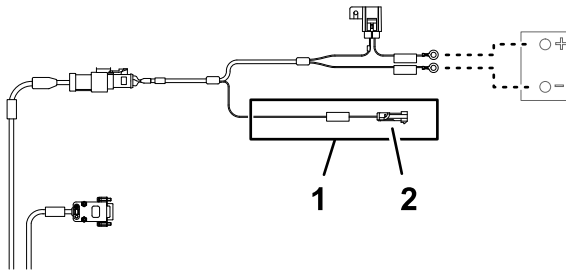


Figure 198

g203670

1. 1-pin connector—electrical interconnect branch
(*****IMPORTANT*** ONLY CONNECT THIS WIRE TO SWITCHED 12V POWER SOURCE**)
2. 100 cm (39-3/8 inch) battery-harness branch (switched power)

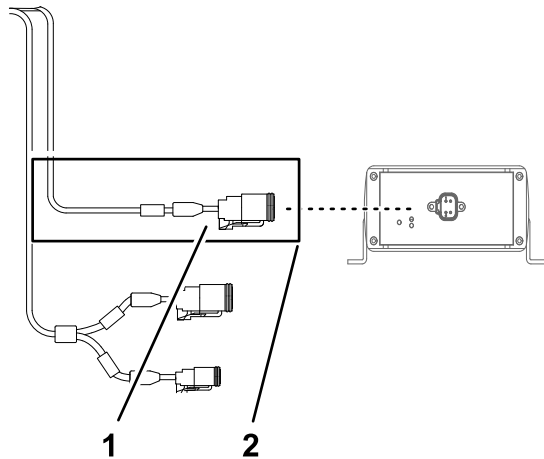


Figure 199

g203666

1. 4-pin connector (CAN 2/ASC10 BUS)
2. 13 cm (5-1/16 inch) data-harness branch (kit harness interface)

1. Route the data harness and battery harness down the back of the left, vertical roll bar to the cross member for the seat support ([Figure 200](#)).

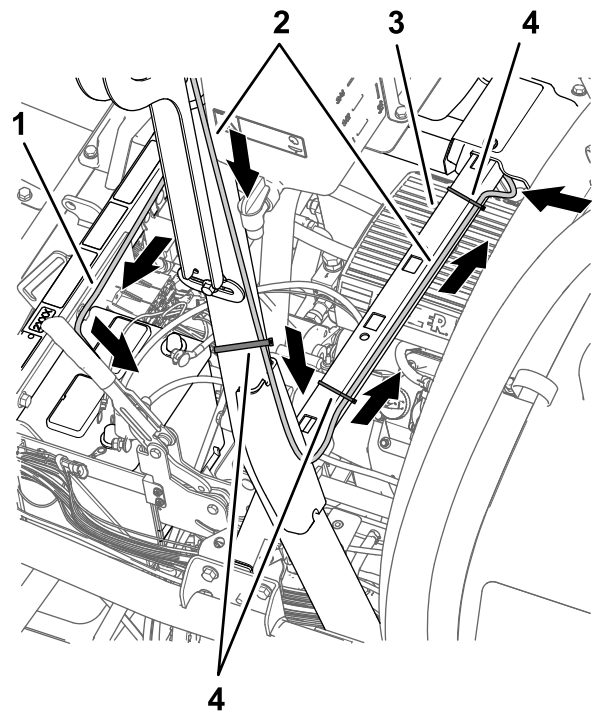


Figure 200

g202521

1. 220 cm (86-5/8 inch) battery-harness branch (do not route the 100 cm (39-3/8 inch) electrical-interconnect branch (switched power) with the battery-harness branch)
2. 390 cm (153-1/2 inch) data-harness branch (navigation receiver)
3. Cross member (seat support)
4. Cable ties

2. Secure the 390 cm (153-1/2 inch) data-harness branch for the navigation receiver to the roll bar as shown in [Figure 200](#).
3. Connect the 1 pin connector of the battery harness labeled *****IMPORTANT*** ONLY CONNECT THIS WIRE TO SWITCHED 12V POWER SOURCE** into the 1-socket connector of the 66 cm (26 inch) kit wire-harness branch ([Figure 201](#)) labeled (SW'D PWR FOR GEN 2 TOPCON).

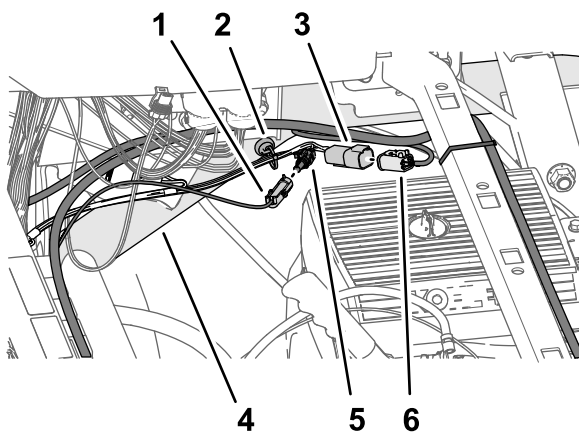


Figure 201

g202588

1. 1-pin connector—battery-harness branch (**IMPORTANT** ONLY CONNECT THIS WIRE TO SWITCHED 12V POWER SOURCE)
 2. Magnetic harness anchor
 3. 4-pin connector—66 cm (26 inch) kit wire-harness branch (ASC 10 PWR & CAN FROM X30)
 4. Right, upper-frame tube
 5. 1-socket connector—66 cm (26 inch) kit wire-harness branch (SW'D PWR FOR GEN 2 TOPCON)
 6. 4-socket connector—data-harness branch (CAN 2/ASC10 BUS)
-
4. Connect the 4-pin connector of the 66 cm (26 inch) kit wire-harness branch labeled ASC 10 PWR & CAN FROM X30 into the 4-socket connector of the data-harness branch labeled CAN 2/ASC10 BUS (Figure 201).
 5. Route the data harness and battery harness across the cross member for the seat support and secure the 390 cm (153-1/2 inch) data-harness branch to the cross member with 2 cable ties (Figure 200 and Figure 202).

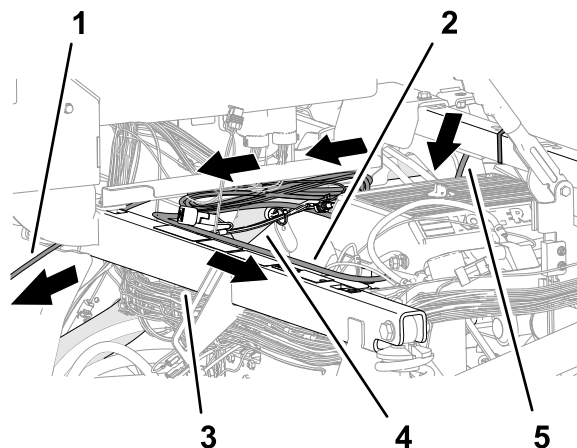


Figure 202

g202520

1. 220 cm (86-5/8 inch) data-harness branch (sprayer monitor)
 2. 220 cm (86-5/8 inch) battery-harness branch
 3. Shock-support tube
 4. Right, upper-frame tube
 5. 390 cm (153-1/2 inch) data-harness branch (navigation receiver)
-
6. Route the 220 cm (86-5/8 inch) battery-harness branch along the right, upper-frame tube (Figure 202).
 7. Route the 220 cm (86-5/8 inch) battery-harness branch across the shock-support tube toward the battery (Figure 202).
- Note:** Ensure that the 100 cm (39-3/8 inch) electrical-interconnect branch (switched power) remains routed against the right, upper-frame tube.
8. Route the 220 cm (86-5/8 inch) data-harness branch (the harness branch with the 26-socket connector) below the control console and forward toward the dash panel (Figure 202).

Routing and Connecting the Data Cable to the Sprayer Monitor

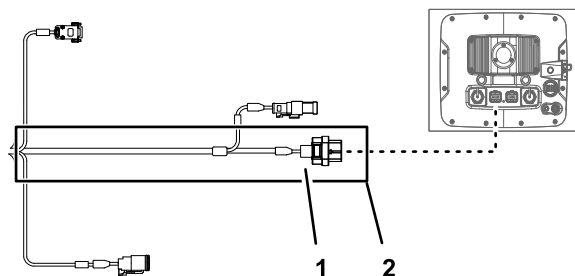


Figure 203

g203669

1. 26-socket connector—data harness (sprayer monitor)
2. 220 cm (86-5/8 inch) data-harness branch (sprayer monitor)

1. Route the 220 cm (86-5/8 inch) data-harness branch (the harness branch with the 26-socket connector) forward and under the dash panel ([Figure 204](#)).

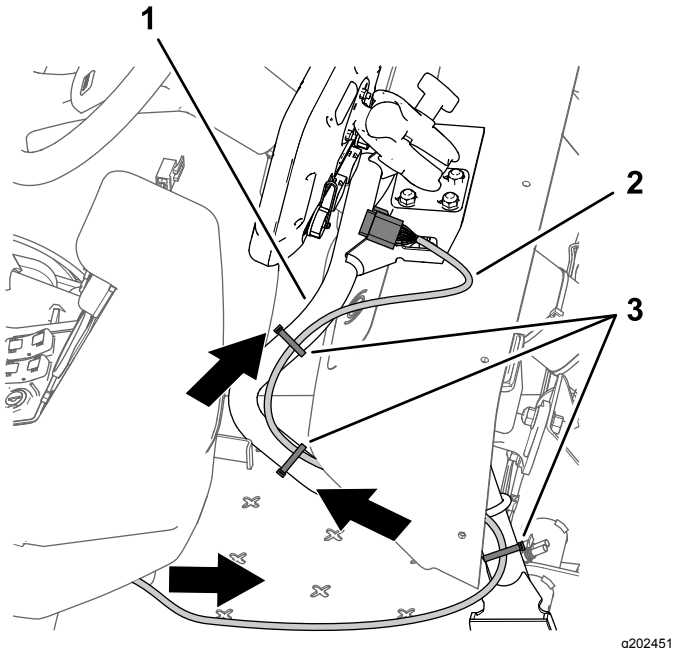


Figure 204

1. Support tube (monitor)
2. 220 cm (86-5/8 inch) data-harness branch
3. Cable ties

2. Route the 220 cm (86-5/8 inch) data-harness branch along the support tube for the monitor ([Figure 204](#)).
3. Align the 26-socket connector of the data harness with the 26-pin connector of the sprayer monitor and press the socket connector into the pin connector until the latch of the connector snaps securely ([Figure 205](#)).

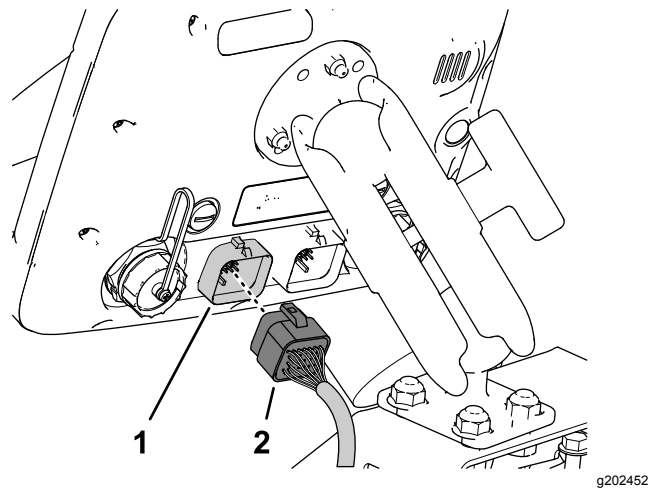


Figure 205

1. 26-pin connector (sprayer monitor)
2. 26-socket connector—data harness (sprayer monitor)

4. Ensure that the 220 cm (86-5/8 inch) data-harness branch has enough slack to allow the sprayer operator to adjust the position of the monitor and secure the harness to the support tube for the monitor with cable ties as shown in [Figure 204](#).

Assembling the Quick-Disconnect Clamps to the Battery

1. Remove the hex nuts and washers from the red and black handle quick-connect clamps ([Figure 206](#)).

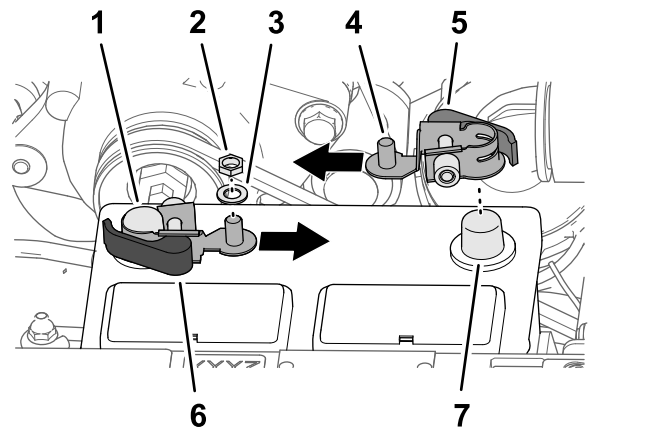


Figure 206

1. Negative battery post
2. Hex nut (1/4 inch—quick-connect clamp)
3. Washer (1/4 inch—quick-connect clamp)
4. Threaded post
5. Red-latch handle (quick-connect clamp)
6. Black-latch handle (quick-connect clamp)
7. Positive battery post

- Open the latch handle of the quick-connect clamp with the black handle (Figure 207).

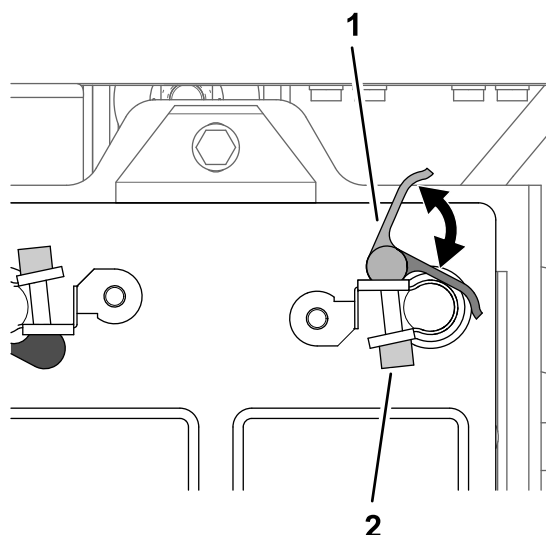


Figure 207

g202703

- Handle (quick-connect clamp)
- Knurled nut

- Assemble the quick-connect clamp onto the negative battery post, with the threaded post of the clamp aligned toward the center of the battery as shown in Figure 206.

- Close the latch handle of the quick-connect clamp (Figure 207).

Note: If you need to adjust the clamping force of the quick-connect clamp, open the handle, rotate the knurled nut to increase or decrease the clamping force, and close the handle for the clamp.

- Repeat steps 2 through 4 for the quick-connect clamp with the red handle at the positive battery post.

Connecting the Battery

⚠ WARNING

Incorrect battery cable routing could damage the machine and cables causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.

- Always **disconnect** the negative (black) battery cable before disconnecting the positive (red) cable.
- Always **connect** the positive (red) battery cable before connecting the negative (black) cable.

⚠ WARNING

Battery terminals or metal tools could short against metal components causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.

- When removing or installing the battery, do not allow the battery terminals to touch any metal parts of the machine.
- Do not allow metal tools to short between the battery terminals and metal parts of the machine.

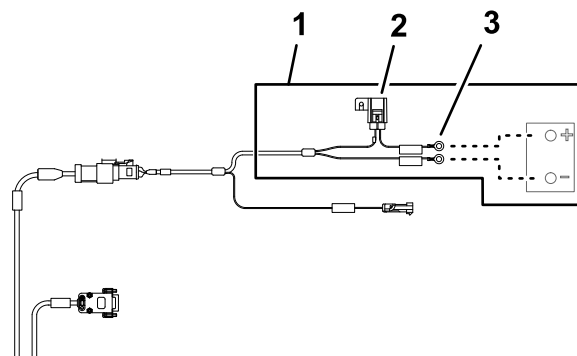


Figure 208

g203667

- 220 cm (86-5/8 inch) battery-harness branch
- 10 A fuse (battery)
- Ring terminals (battery)

- Slit the insulator cover of the positive battery cable to the starter as shown in Figure 209.

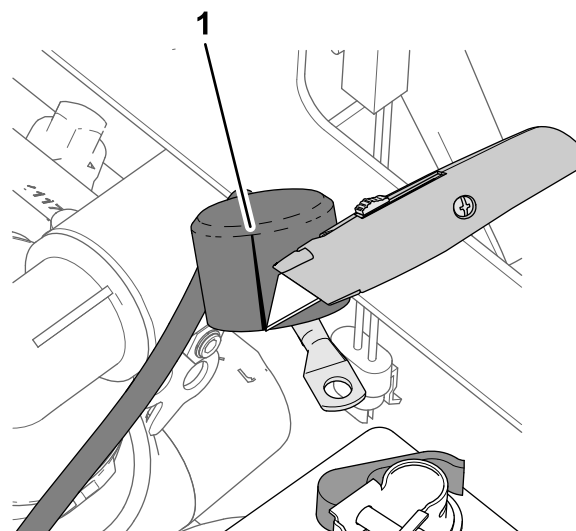


Figure 209

g202746

- Slit (insulator cover—positive battery cable to the starter)
- Assemble the following wire and cable terminals onto the threaded post of the positive battery terminal (Figure 210) in the following order:

Note: Ensure that the battery-cable terminal (positive) to the engine starter is positioned at the top of the stack of terminals on the threaded post.

- A. Ring terminal—22 cm (8-1/2 inch) machine-wire harness labeled BATTERY (+)
- B. Ring terminal—220 cm (86-5/8 inch) battery-harness branch labeled
IMPORTANT CONNECT THIS WIRE TO POSITIVE ON BATTERY
- C. Ring terminal—60 cm (23-1/2 inch) kit wire-harness branch labeled TO BATTERY POSITIVE
- D. Battery-cable terminal (positive)—to the alternator (50 A)
- E. Battery-cable terminal (positive)—to the engine starter

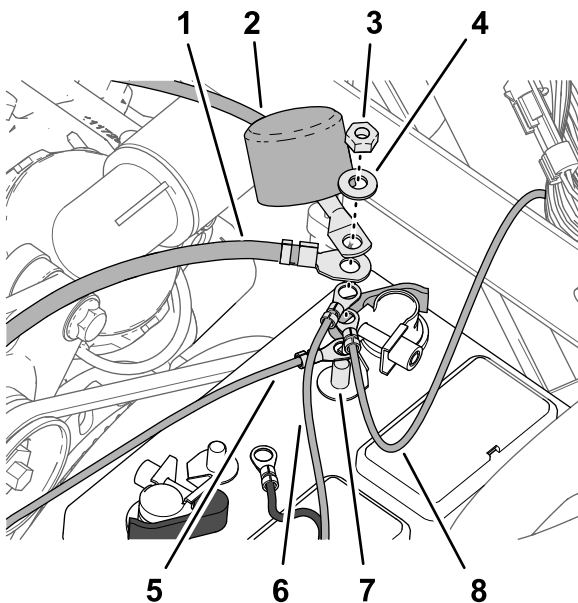


Figure 210

g202767

- | | |
|---|---|
| 1. Battery-cable terminal (positive)—to the alternator (50 A) | 5. Ring terminal—60 cm (23-1/2 inch) kit wire-harness branch (TO BATTERY POSITIVE) |
| 2. Battery-cable terminal (positive)—to the engine starter | 6. Ring terminal—220 cm (86-5/8 inch) battery-harness branch (**IMPORTANT** CONNECT THIS WIRE TO POSITIVE ON BATTERY) |
| 3. Hex nut (1/4 inch—quick-connect clamp) | 7. Threaded post (positive battery terminal) |
| 4. Washer (1/4 inch—quick-connect clamp) | 8. Ring terminal—22 cm (8-1/2 inch) machine-wire harness (BATTERY (+)) |

3. Assemble the hex nut (1/4 inch) and washer (1/4 inch) onto the threaded post, and torque the nut to 1017 to 1234 N·cm (90 to 110 in-lb).

4. Align the insulator cover of the positive battery cable to the starter over the threaded post (Figure 210).
5. Assemble the following wire and cable terminals onto the threaded post of the negative battery terminal (Figure 211) in the following order:

Note: Ensure that the battery-cable terminal (negative) to the engine and chassis ground is positioned at the top of the stack of terminals on the threaded post.

- A. Ring terminal—220 cm (86-5/8 inch) battery-harness branch labeled (**IMPORTANT** CONNECT THIS WIRE TO – VE TERMINAL OF BATTERY WHICH IS CONNECTED TO TRACTOR FRAME)
- B. Ring terminal—60 cm (23-1/2 inch) kit wire-harness branch—battery negative
- C. Battery-cable terminal (negative)—to the engine and chassis ground

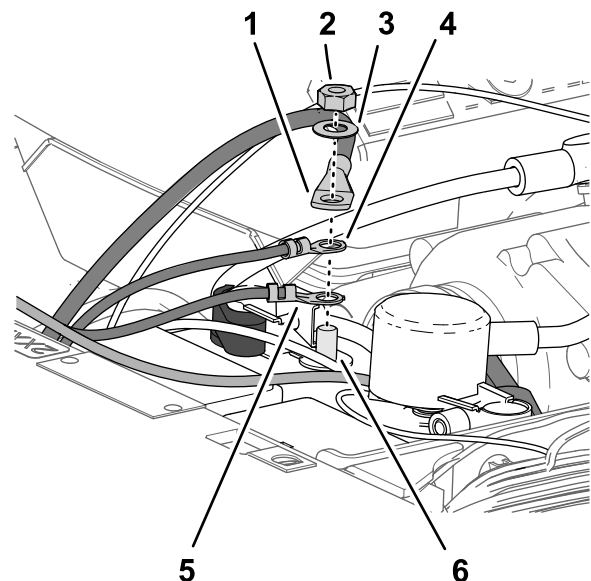


Figure 211

g202745

- | | |
|---|---|
| 1. Battery-cable terminal (negative)—to the engine and chassis ground | 4. Ring terminal—60 cm (23-1/2 inch) kit wire-harness branch—battery negative |
| 2. Hex nut (1/4 inch—quick-connect clamp) | 5. Ring terminal—220 cm (86-5/8 inch) battery-harness branch (**IMPORTANT** CONNECT THIS WIRE TO – VE TERMINAL OF BATTERY WHICH IS CONNECTED TO TRACTOR FRAME)) |
| 3. Washer (1/4 inch—quick-connect clamp) | 6. Threaded post (negative battery terminal) |

Securing the Harness

1. Gather the excess length of the data harness against the right, upper-frame tube (Figure 212).

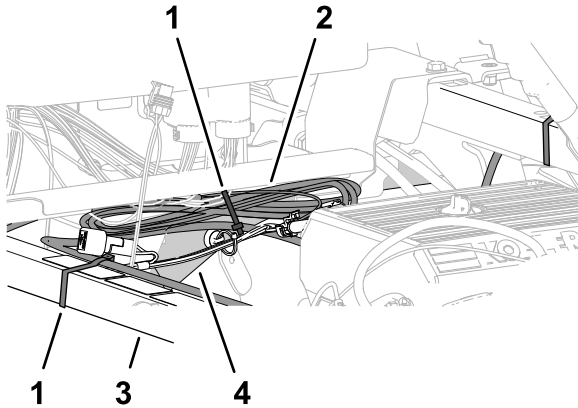


Figure 212

g202768

1. Cable tie
 2. Data-harness bundle
 3. Shock-support tube
 4. Right, upper-frame tube
2. Align the data harness to the shock-support tube, and secure the harness to the tube with a cable tie (Figure 212).
 3. Align the data-harness bundle to the right, upper-frame tube, and secure the harness bundle to the frame tube with a cable tie (Figure 212).
 4. Ensure that there is clearance between the pulleys and belts and the data harness, battery harness, kit wire harness, and battery cables.

Secure the wire harness and cables with cable ties as needed to provide clearance away from the belts and pulleys.

35

Installing the Hood and the Left and Right Front Fenders

Parts needed for this procedure:

13	Push-in fastener
----	------------------

Installing the Hood

1. Align the hood holes in the hood with the holes in the dash panel and frame of the machine (Figure 213).

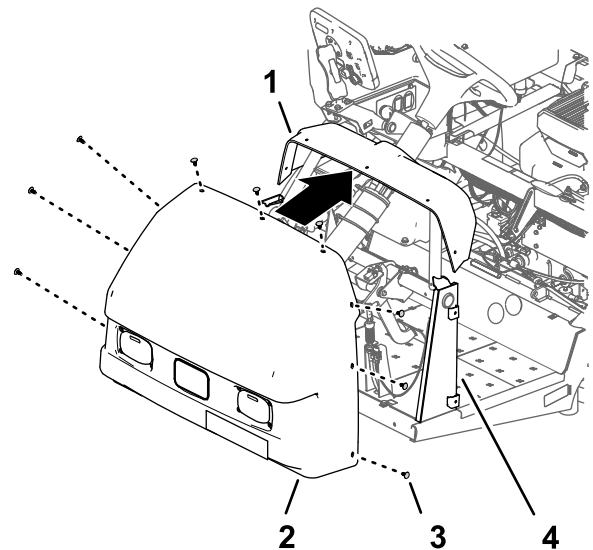


Figure 213

g202004

1. Dash panel
2. Hood
3. Push-in fastener
4. Dash support

2. Secure the hood to the dash and frame with 9 push-in fastener (Figure 213).
3. Connect the 2 electrical connectors (2-socket) of the machine wire harness from the 2-pin connectors of the left and right headlights (Figure 214).

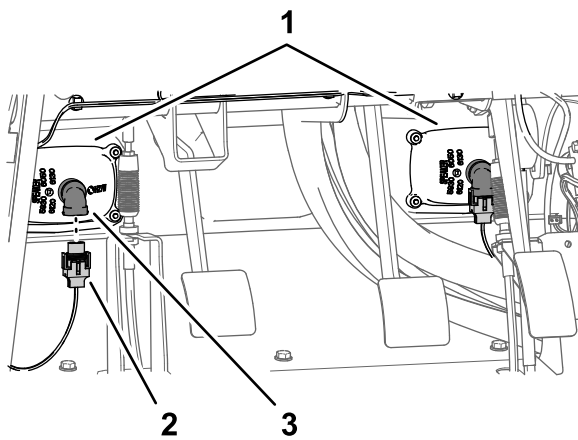


Figure 214

g197153

1. Headlights
2. 2-socket connector (machine wire harness)
3. 2-pin connector (headlight)

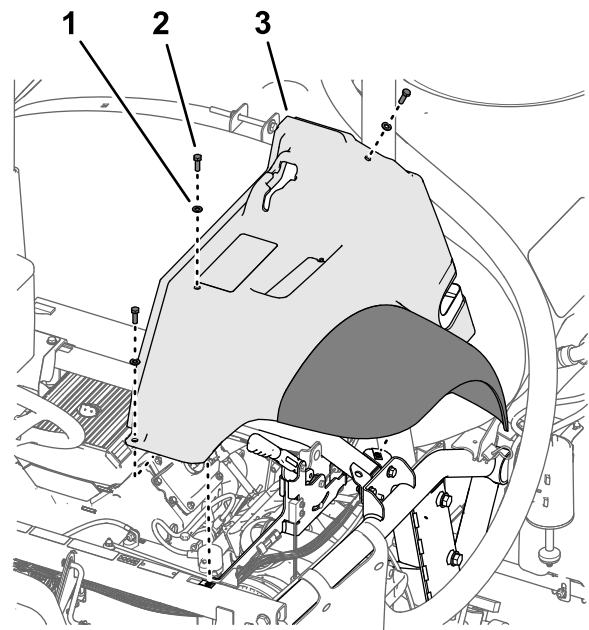


Figure 216

g197152

1. Washer (5/16 inch)
2. Bolt (5/16 x 1 inch)
3. Left, front fender

Installing the Left and Right Front Fenders

1. Align the inner-fender shroud to the left, upper- and left, lower-frame tubes ([Figure 214](#)).

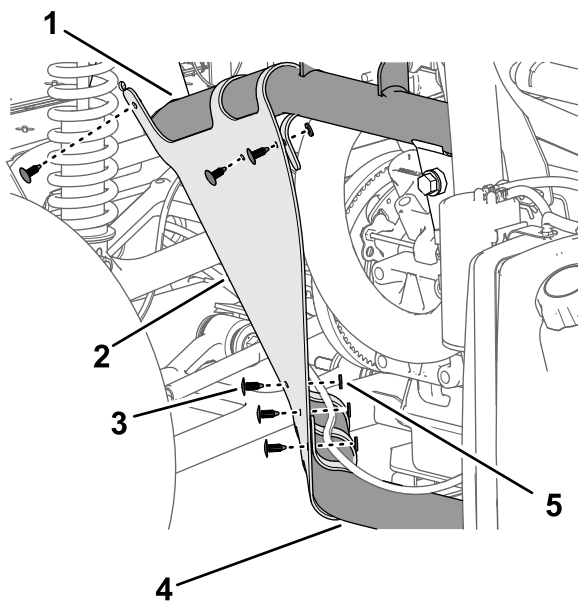


Figure 215

g202023

1. Left, upper-frame tube
2. Inner-fender shroud
3. Push-in fastener
4. Left, lower-frame tube
5. Washer (9/16 x 1/2 inch)

2. Secure the inner-fender shroud to the frame tubes with the 6 push-in fasteners ([Figure 215](#)).
3. Align the holes in the fender with the holes in the frame of the machine as shown in [Figure 215](#).

4. Loosely assemble the fender to the frame ([Figure 216](#)) with the 3 bolt (5/16 x 1 inch) and 3 washer (5/16 inch) that you removed in step 2 of [Removing the Left and Right Front Fenders](#) (page 11).
5. Secure the fender to the frame channel with the 2 push-in fasteners ([Figure 217](#)).

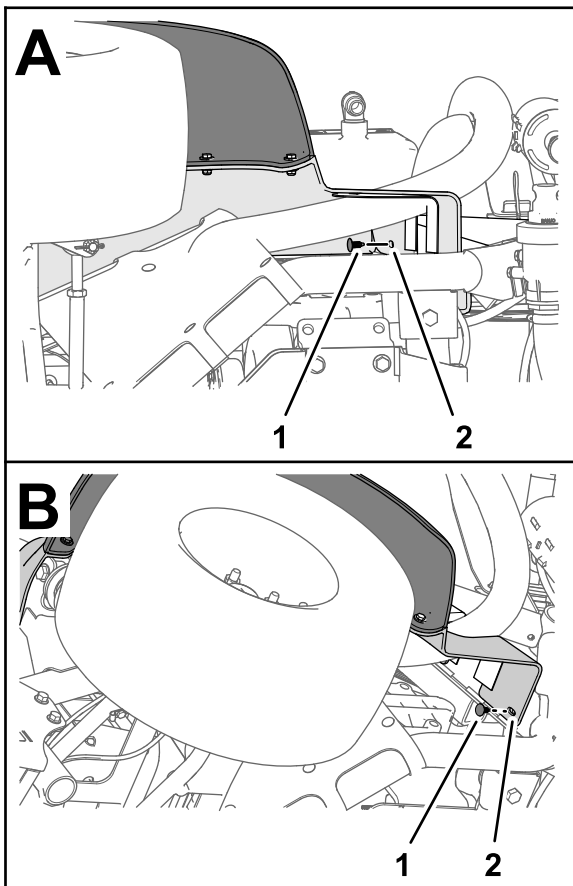


Figure 217

g264614

1. Push-in fastener
 2. Left, front fender
-
6. Torque the bolt (5/16 x 1 inch) to 1978 to 2542 N·cm (175 to 225 in-lb).
 7. Repeat steps 1 through 6 for the inner-fender shroud and fender at the other side of the machine.


36

Installing the Engine-Access Panel and the Seat

No Parts Required

Installing the Engine-Access Panel

1. Align the latches of the engine access panel with the bushings in the panel-support brackets on the roll bar ([Figure 218](#)).

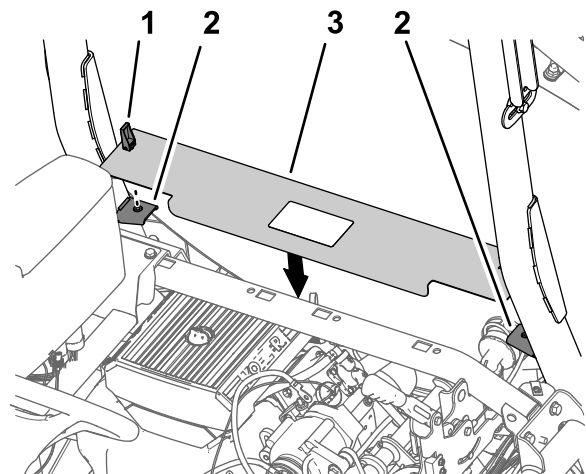

g202414

Figure 218

1. Latch
 2. Panel-support bracket
 3. Engine access panel
-
2. Assemble the panel onto the brackets ([Figure 218](#)).
 3. Rotate the handles latches down to secure the panel to the brackets ([Figure 218](#)).

Installing the Seat

1. Align the seat and seat plate to the chassis of the machine ([Figure 219](#)).


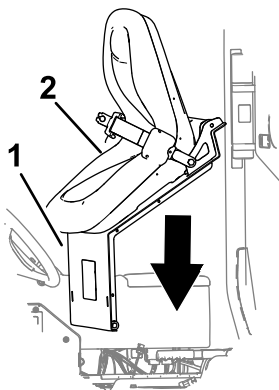


Figure 219

g202000


1. Seat plate
2. Seat

2. Align the holes in the pivot fittings of the seat pan with the holes in the chassis bracket ([Figure 220](#)).

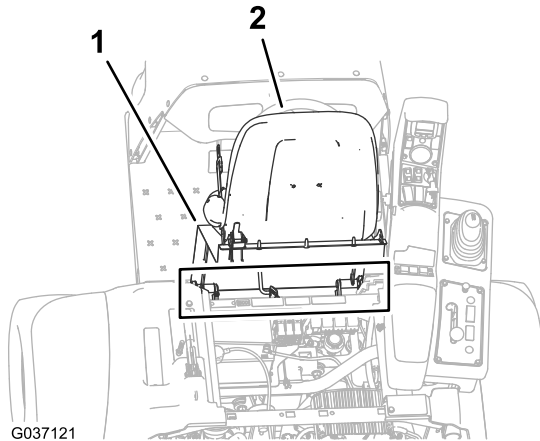

G037121

g037121

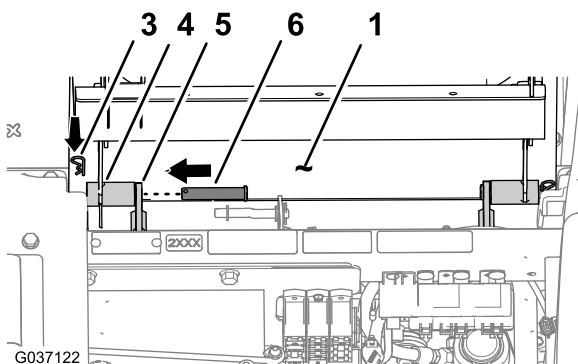

G037122


g202002

Figure 220

1. Seat plate
2. Seat
3. Hairpin
4. Pivot fitting (seat pan)
5. Chassis bracket
6. Pivot pin

3. Assemble the seat pan to the chassis brackets with the 2 pivot pins ([Figure 220](#)).
4. Secure the pivot pins to the machine with the 2 hairpins ([Figure 220](#)).

5. Assemble the prop rod to the bracket of the seat with the washer and hairpin ([Figure 221](#)).

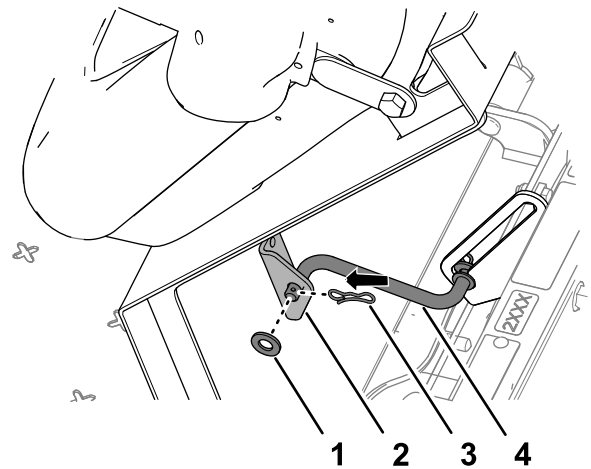


g202001

Figure 221

1. Washer
2. Bracket (seat)
3. Hairpin
4. Prop rod

6. Plug the 2-socket connector of the machine wire harness into the connector for the seat switch until the connectors latch securely ([Figure 222](#)).

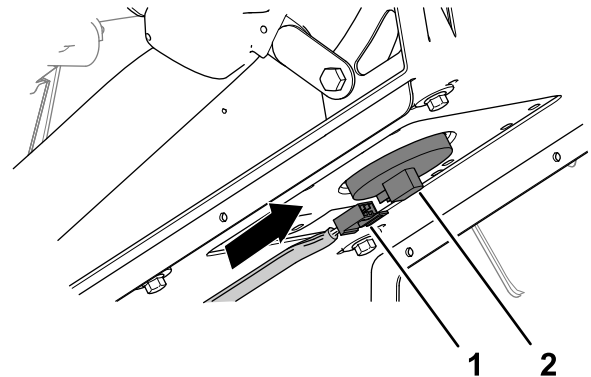

g202003

Figure 222

1. 2-socket connector (machine wire harness)
2. Seat-switch connector

7. Rotate the seat forward slightly, remove the prop rod from the detent, rotate the seat down until the seat latches securely.

37

Programming the Machine Settings

No Parts Required

Procedure

1. Insert the key into the key switch and rotate it to the ON position.

The splash screen appears in the InfoCenter display and the indicator light illuminates briefly (Figure 223).

Note: Do not start the engine.

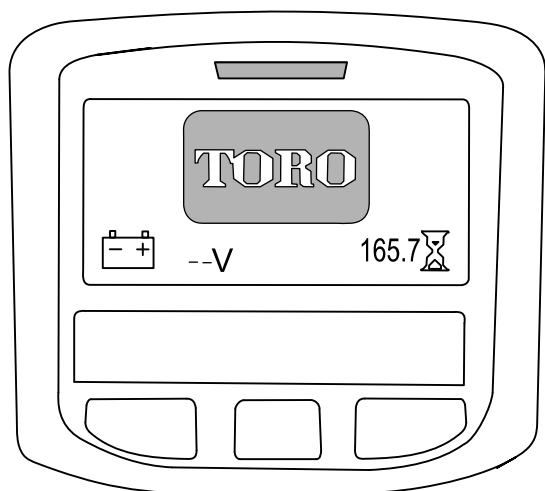


Figure 223

g202877

2. At the Home screen, press the center button on the InfoCenter to access the navigation screen (Figure 224).

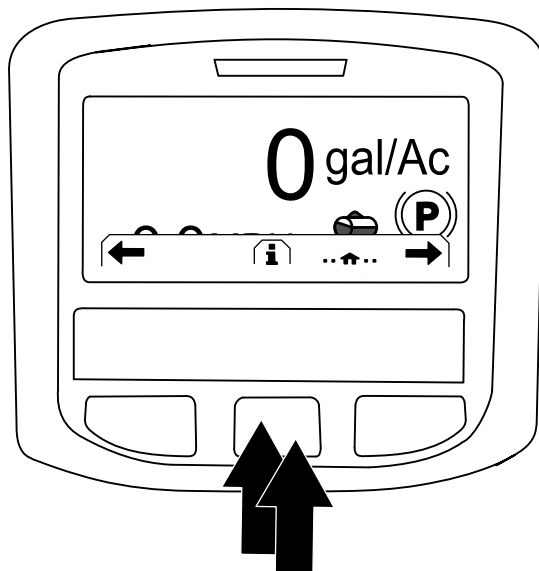


Figure 224

g202868

3. Press the center button on the InfoCenter to access the Main Menu (Figure 224).
4. At the MAIN MENU screen, press the center button to navigate to the SETTING option, and press the right button to select the option (Figure 225).

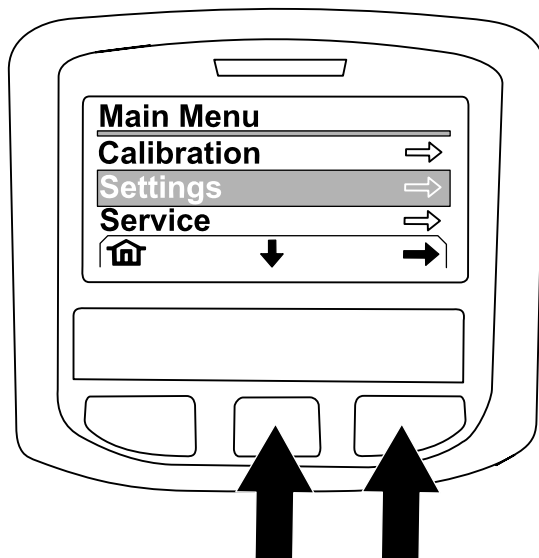


Figure 225

g202874

5. At the SETTING screen, press the center button to navigate to the PROTECTED SETTINGS option, and press the right button to select the option.

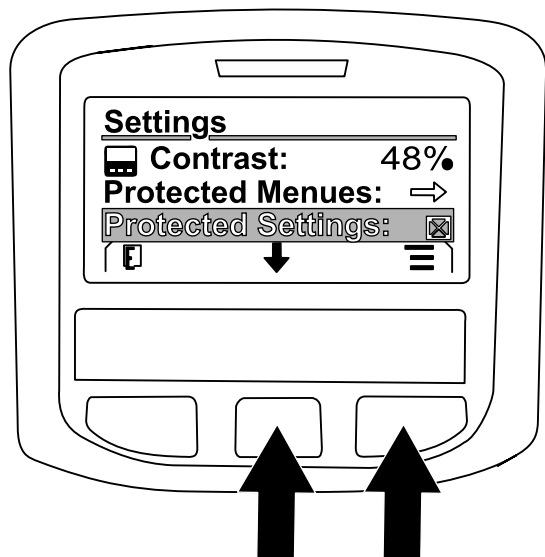


Figure 226

g202869

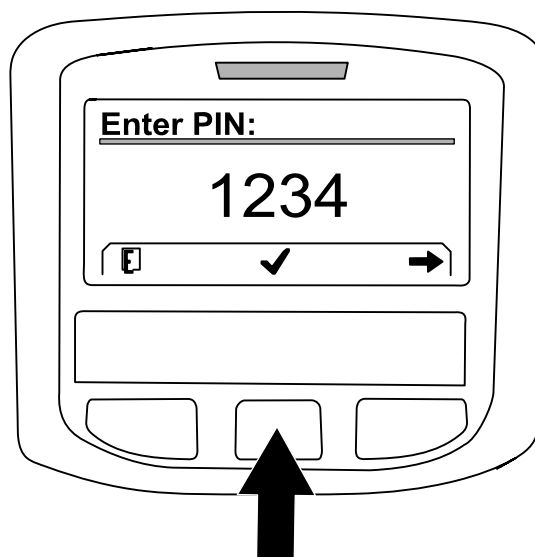


Figure 228

g202871

6. Enter the PIN code as follows:

- A. Press the center button as needed to enter the PIN code number for the left position (Figure 227).

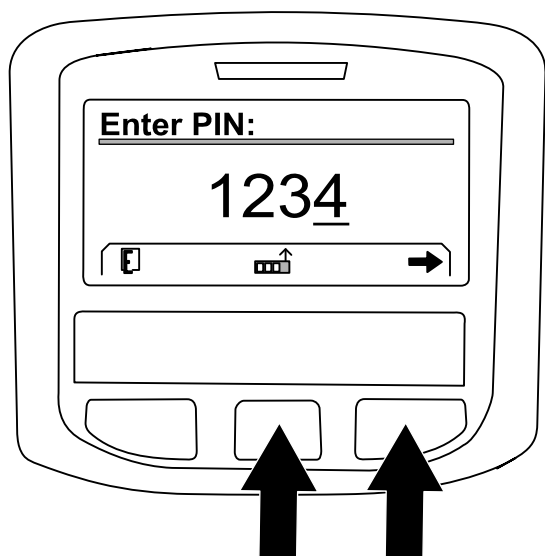


Figure 227

g202870

7. Press the center button to navigate to the GEOLINK option, and press the right button to set the option (Figure 229).

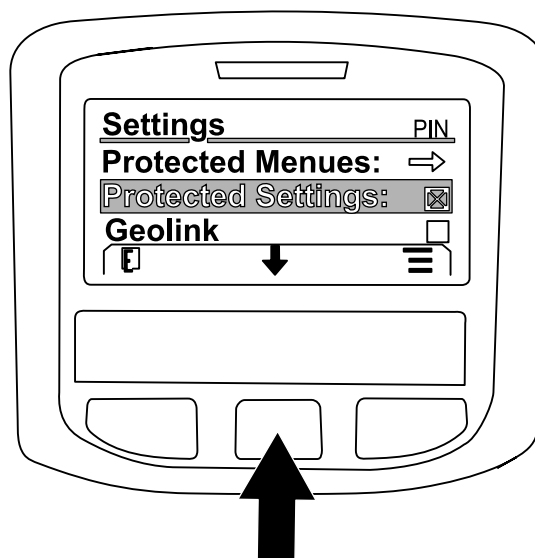


Figure 229

g202875

- B. Press the right button to navigate to the next PIN code number position (Figure 227).
- C. Repeat steps A and B for the 3 other PIN code number positions.
- D. When all the PIN code numbers are entered press the right button (Figure 227) and then press the center button to enter the PIN code (Figure 228).

The indicator light illuminates briefly.

The GeoLink confirmation screen displays in the InfoCenter (Figure 230).



Figure 230

g202872

8. Rotate the ignition switch to the OFF position and then to the ON position.
9. The GEOLINK splash screen initially appears when you rotate the key switch to the ON position.

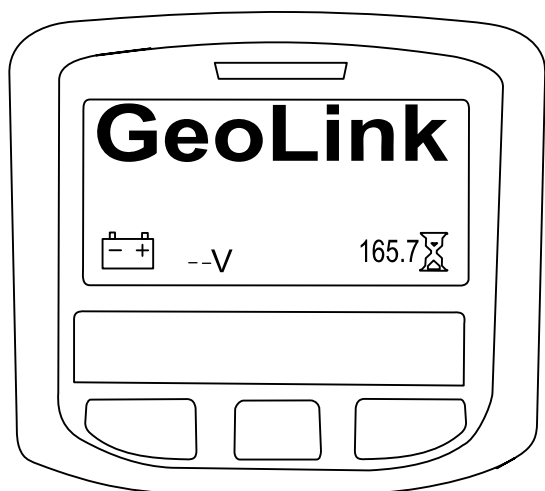


Figure 231

g202878

38

Powering the GeoLink Components

No Parts Required

Procedure

1. Turn the ignition key to the RUN (gasoline) or PREHEAT/RUN (diesel) position.
2. Verify that the following components indicate that each receives power:
 - Control console—displays graphics and text ([Figure 232](#))

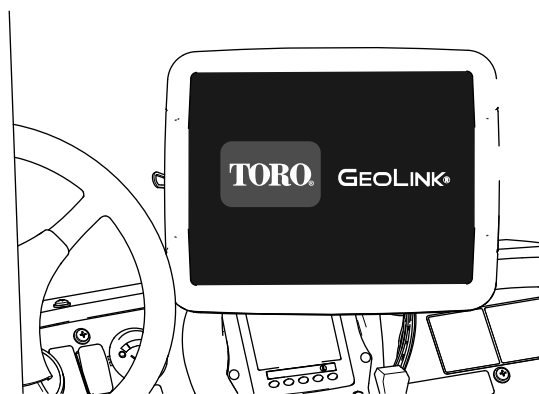


Figure 232

g302921

- Satellite receiver—the PWR indicator illuminates ([Figure 233](#))

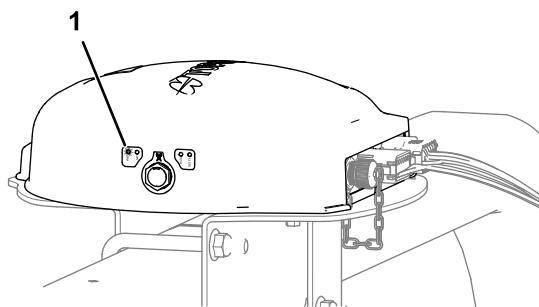


Figure 233

g302922

1. PWR indicator (satellite receiver)

- Automatic section controller—the STATUS indicator illuminates ([Figure 234](#))

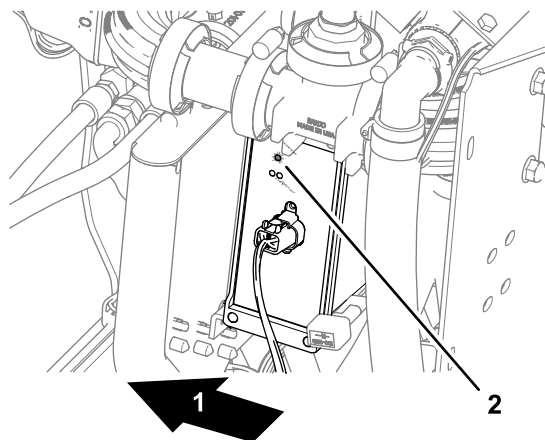


Figure 234

1. Back of the machine
2. STATUS indicator (automatic section controller)

g302923

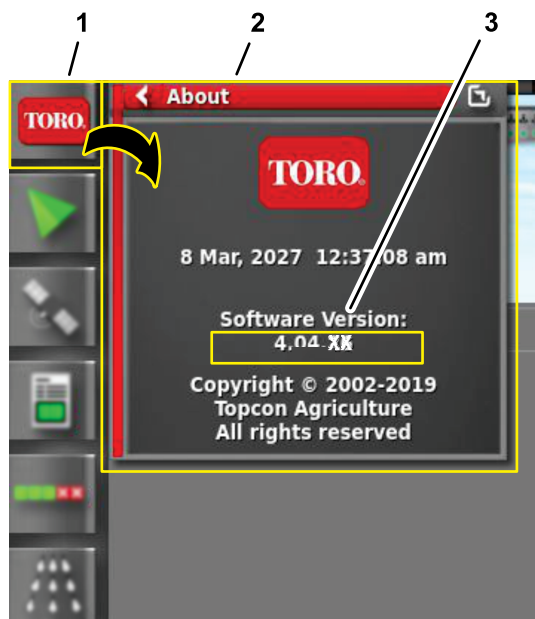


Figure 235

g302935

3. Turn the ignition key to the OFF position.
4. Verify that power is shut off at the following components:
 - Control console
 - Satellite receiver
 - Automatic section controller

1. ABOUT (Toro) icon
2. ABOUT fly-out-window
3. Software version number

3. Compare the software version numbers at the following locations:
 - When used, the cover page of the *Software Guide* for your GeoLink system
 - Displayed in the command console

Note: If the software versions differ, contact Toro NSN at 1-844-GEOLINK (1-844-436-5465) or NSNTech@toro.com for customer service.

39

Verifying the Software Version

No Parts Required

Procedure

1. Turn the ignition key to the RUN(gasoline) or PREHEAT/RUN (diesel) position.
2. Press the ABOUT (Toro) icon at the upper left corner of the control console (Figure 235).

40

Selecting the Units of Measure

No Parts Required

Procedure

Select the units of measure; refer to the *Operator's Manual* or *Software Guide* for your GeoLink system.

41

Creating a Field

No Parts Required

Procedure

Create a new field; refer to the *Operator's Manual* or *Software Guide* for your GeoLink system.

42

Creating a New Application Rate Product

No Parts Required

Procedure

Create a new product and application rate entry; refer to the *Operator's Manual* or *Software Guide* for your GeoLink system.

43

Balancing the Nozzle Valves

Multi Pro 1750

No Parts Required

Procedure

Balance the nozzle valves by performing the following procedures:

1. Selecting the Spray Nozzle-Preparing to Balance the Nozzle Valves; refer to the *Operator's Manual* or *Software Guide* for your GeoLink system.
2. Selecting the Spray Nozzle-Valve Balancing Wizard-Steps 1 through 3; refer to the *Operator's*

Manual or *Software Guide* for your GeoLink system.

3. Selecting the Spray Nozzle-Valve Balancing Wizard-Steps 4 through 6; refer to the *Operator's Manual* or *Software Guide* for your GeoLink system.

44

Creating a Spray Job

No Parts Required

Procedure

1. Press the Job Menu and press the CREATE NEW JOB icon (Figure 236).

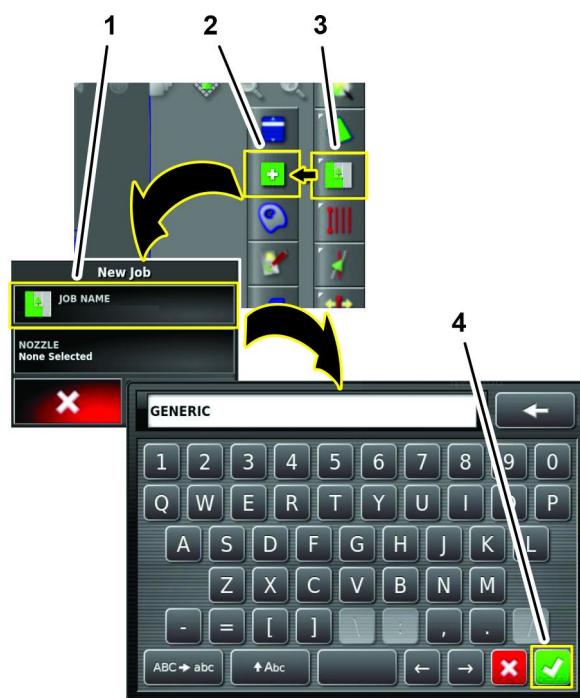


Figure 236

g304037

1. JOB NAME icon
 2. CREATE NEW JOB icon
 3. JOB MENU icon
 4. Confirm icon
2. Use on-screen keyboard to type a name for the generic job, and press the confirm icon (Figure 236).
 3. In the new job dialog box, press the NOZZLE icon (Figure 237).

Checking the Spray System

No Parts Required

Procedure

1. Engage the parking brake.
2. Add 200 L (50 US gallon) of water into the spray tank; refer to the *Operator's Manual* for your machine.
3. Start the engine and set the engine speed to fast.
4. On the GeoLink control console, press the SPRAY RATE CONTROLLER icon ([Figure 239](#)).



Figure 237

g304039

1. NOZZLE icon
 2. Nozzle selection list icons
 3. Confirm icon
-
4. In the nozzle selection list, press any nozzle icon, and press the confirm icon ([Figure 237](#)).
 5. In the new job dialog box, press the confirm icon ([Figure 238](#)).



Figure 238

g304038

1. Confirm icon
-

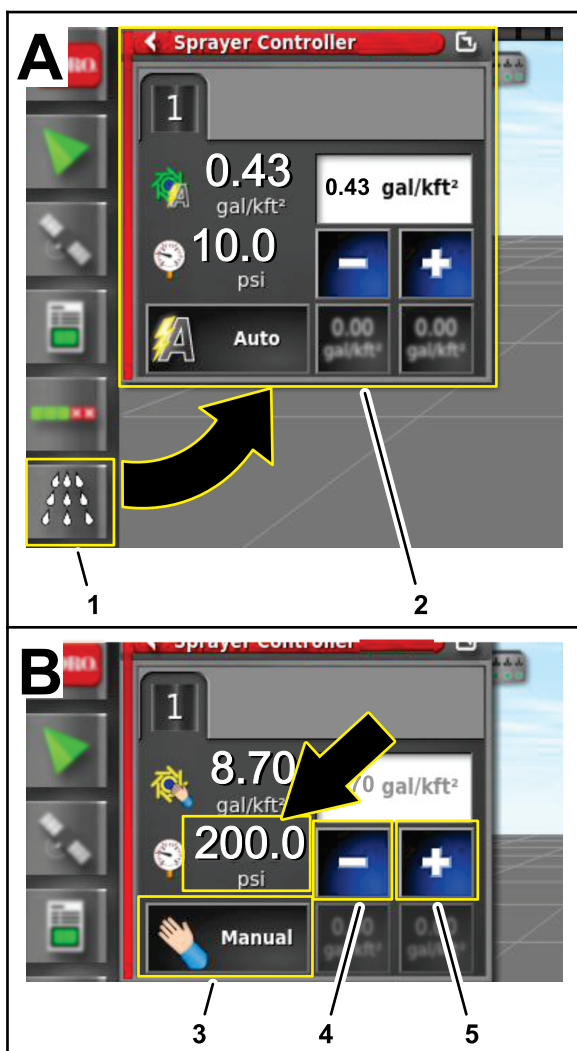


Figure 239

g303612

1. SPRAY RATE CONTROLLER icon
 2. Dialog box (spray rate controller)
 3. RATE CONTROL MODE icon (manual mode)
 4. Decrement icon (-)
 5. Increment icon (+)
5. In the spray rate controller dialog box, press the RATE CONTROL MODE icon until manual mode displays (Figure 239).
 6. Use the decrement icon (-) or increment icon (+) to adjust the spray system pressure (Figure 239) to 13.75 bar (200 psi).
 7. On the machine, press the master-section switch to the ON position (Figure 240).

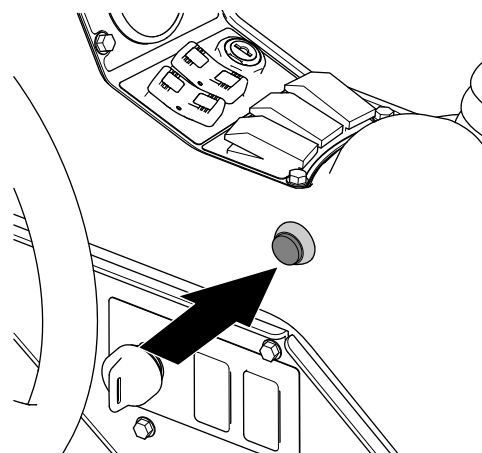


Figure 240

g205125

Master section switch—Multi Pro 1750 turf sprayer:

8. On the GeoLink control console, press the MASTER SWITCH icon (Figure 241) to the ON (green).

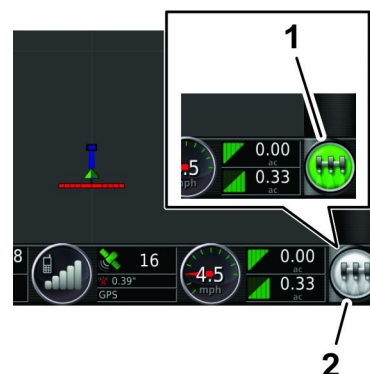


Figure 241

g203807

1. Green MASTER SWITCH icon (system ready, sprayer controller on)
2. White MASTER SWITCH icon (standby)

9. Check all sprayer fittings and components for leaks.

Note: If you find any leaks, shut off the engine and repair the fitting or component.

46

Balancing the Agitation Bypass Valve

No Parts Required

Checking System and Agitation Bypass Pressure

- Engage the parking brake, and start the engine.
Note: Allow the engine and hydraulic system to warm for 10 minutes.
- Ensure that the master section switch to the OFF position.
- Set the spray-pump switch and the tank agitation switch to the ON position.
- Set the left, center, and right section switches to the ON position.
- Set the engine speed to fast.
- On the GeoLink control console, press the SPRAY RATE CONTROLLER icon.
- In the spray rate controller dialog box, press the RATE CONTROL MODE icon until manual mode displays ([Figure 242](#)).

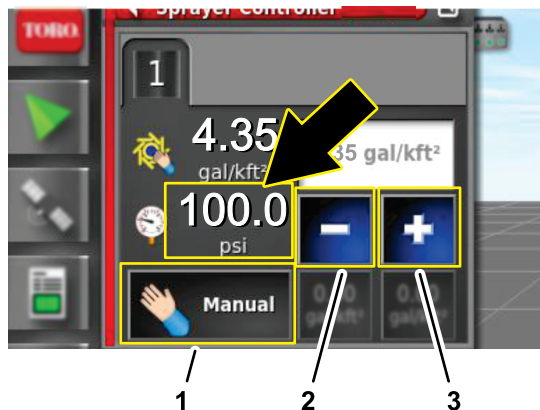


Figure 242

- RATE CONTROL MODE icon (manual mode)
 - Decrement icon (-)
 - Increment icon (+)
- Press the decrement icon (-) or increment icon (+) to adjust the spray system pressure ([Figure 242](#)) to 6.9 bar (100 psi).
 - On the machine, set the tank agitation switch to the OFF position.

- Observe the spray system pressure. If the spray system pressure is 6.9 bar (100 psi), the agitation valve is correctly adjusted.

If the spray system pressure changed, adjust the agitation bypass valve; refer to [Adjusting the Agitation Bypass Valve](#) (page 105).

Adjusting the Agitation Bypass Valve

- With the tank agitation switch in the OFF position, walk to the back of the machine and locate the agitation bypass valve.

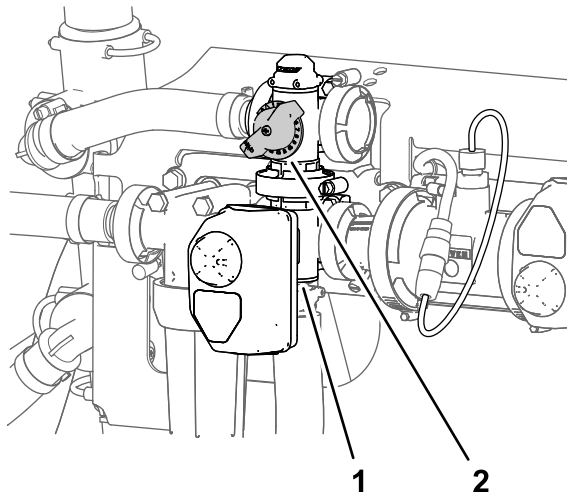


Figure 243

- Actuator (agitation valve)
- Agitation-bypass valve

- Adjust the agitation-bypass valve ([Figure 243](#)) until the gauge indicates 689 kPa (100 psi) sprayer system pressure.
- Set the tank agitation switch to the ON position and observe the spray system pressure.
Note: If the spray system-pressure gauge indicates greater than or less than 6.9 bar (100 psi), repeat steps 1 and 2.
- Set the tank agitation switch to the OFF position and observe the spray system pressure.

Note: If the spray system-pressure gauge indicates greater than or less than 6.9 bar (100 psi), repeat steps 1 and 2.

47

Performing a Flow Meter Calibration

No Parts Required

Procedure

Calibrate the flow meter; refer to the *Operator's Manual* or *Software Guide* for your GeoLink system.

48

Verifying the Cellular Status

No Parts Required

Procedure

1. Move the machine outdoors, away from buildings and power lines.
2. Engage the parking brake.
3. On the GeoLink control console, press the GPS INFORMATION icon ([Figure 244](#)).

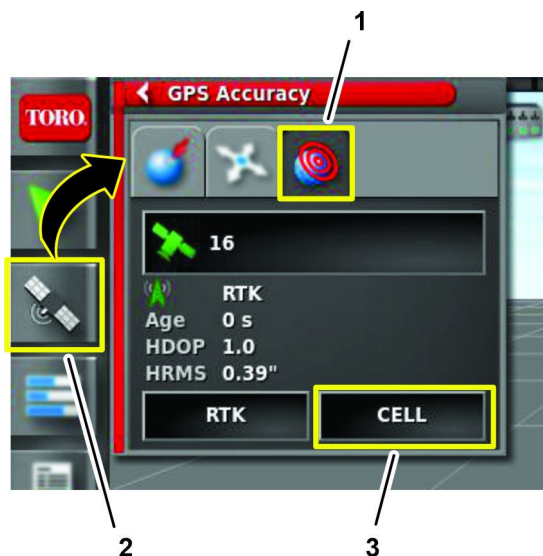


Figure 244

1. GPS ACCURACY icon
2. GPS INFORMATION icon
3. CELL DIAGNOSTIC icon

4. Press the CELL DIAGNOSTIC icon, and verify that the cellular status field displays N-TRIP CONNECTED RECEIVING DATA ([Figure 245](#)).

Note: If the cellular status field displays any message other than N-TRIP CONNECTED RECEIVING DATA, contact Toro NSN at 1-844-GEOLINK (1-844-436-5465) or NSNTech@toro.com for customer service.

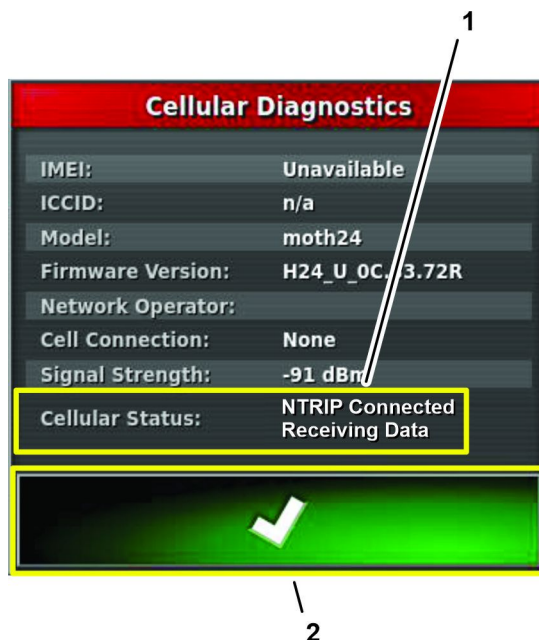


Figure 245

1. Cellular status field
2. Confirm icon

5. Press the confirm icon to close the dialog box.

49

Performing a Compass Calibration

At the Distributor's Location

No Parts Required

Procedure

Perform a compass calibration at the distributor's location; refer to *Calibrating the Compass* in the *Operator's Manual* or *Software Guide* for your GeoLink system.

Clearing NVRAM

At the Customer Location

No Parts Required

Changing the Setup Screen for Dealer Access

Important: You must erase the nonvolatile RAM at the customer location.

1. Contact Toro NSN at 1-844-GEOLINK (1-844-436-5465) or NSNTech@toro.com for customer service to request the dealer access level password.
2. Rotate the ignition key to the ON position.
3. Press the SETUP icon on the main screen (Figure 246).

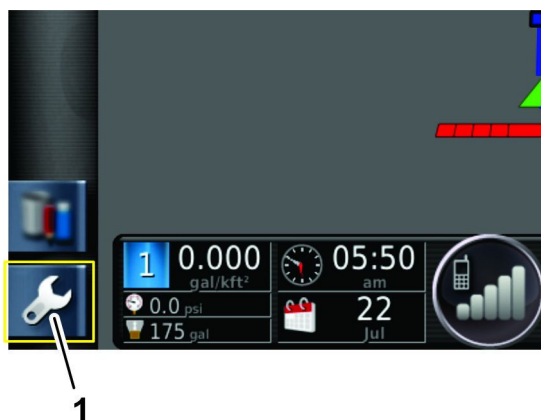


Figure 246

g204035

1. SETUP icon

4. In the setup screen, press the USER icon and the ACCESS LEVEL icon (Figure 247).

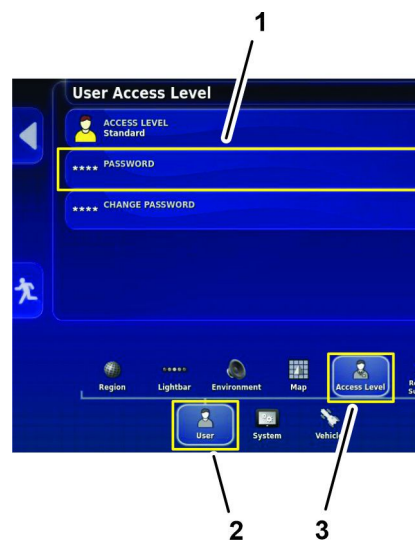


Figure 247

g309146

1. PASSWORD icon
2. USER icon
3. ACCESS LEVEL icon

5. Press the PASSWORD icon (Figure 247).
6. Use the on-screen keyboard to enter the password that you received in step 1, and press the confirm icon (Figure 248).

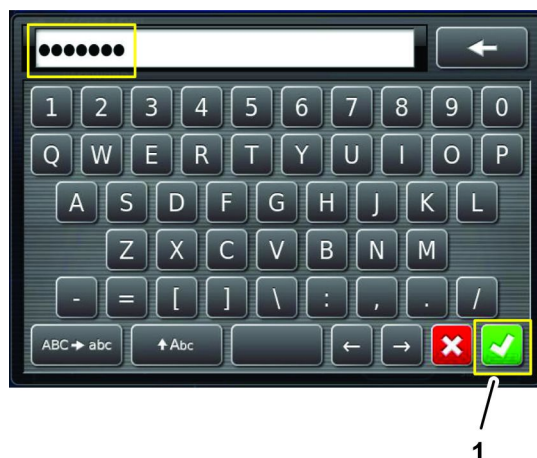


Figure 248

g309149

1. Confirm icon

Note: The user access level screen displays the DEALER icon (Figure 249).

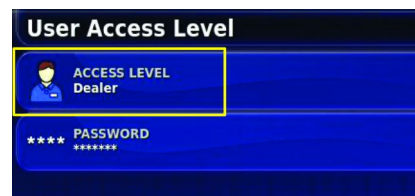


Figure 249

g309223

Erasing the Nonvolatile RAM

- 1. In the setup screen, press the SYSTEM icon, GPS icon, and ADVANCED CONFIGURATION icon (Figure 250).

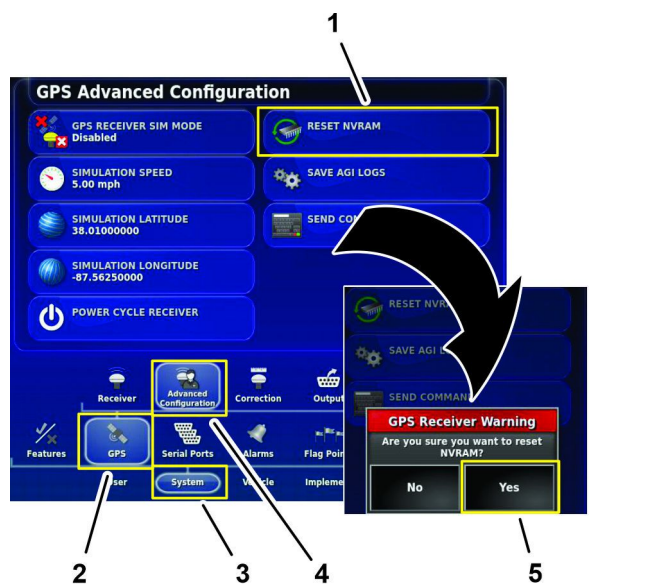


Figure 250

- 1. RESET NVRAM icon
- 2. GPS icon
- 3. SYSTEM icon
- 4. ADVANCED CONFIGURATION icon
- 5. YES icon

- 2. In the GPS Advanced Configuration screen, press the RESET NVRAM icon (Figure 250).
- 3. In the GPS receive warning dialog box, press the YES icon (Figure 250).

Note: The receiver disconnected warning (Figure 251) displays briefly.

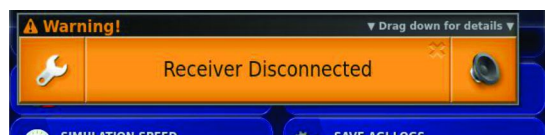


Figure 251

- 4. Wait 2 minutes for the satellite receiver and modem startup.
- 5. Press the EXIT SETUP icon

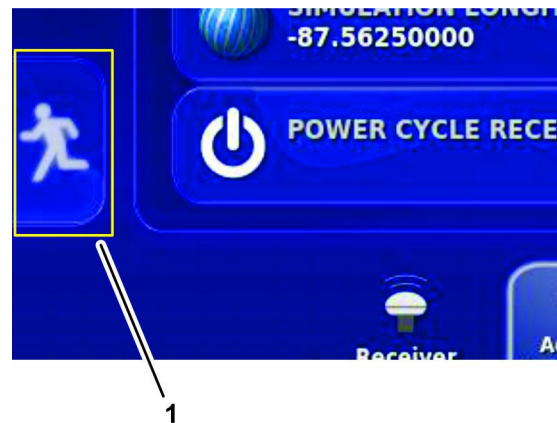


Figure 252

- 1. EXIT SETUP icon
- 6. Rotate the ignition switch to the OFF position.

51

Performing a Compass Calibration

At the Customer Location

No Parts Required

Procedure

Perform a compass calibration at the customer's location; refer to *Calibrating the Compass* in the *Operator's Manual* or *Software Guide* for your GeoLink system.

Notes:

Notes:

EEA/UK Privacy Notice

Toro's Use of Your Personal Information

The Toro Company ("Toro") respects your privacy. When you purchase our products, we may collect certain personal information about you, either directly from you or through your local Toro company or dealer. Toro uses this information to fulfil contractual obligations - such as to register your warranty, process your warranty claim or to contact you in the event of a product recall - and for legitimate business purposes - such as to gauge customer satisfaction, improve our products or provide you with product information which may be of interest. Toro may share your information with our subsidiaries, affiliates, dealers or other business partners in connection these activities. We may also disclose personal information when required by law or in connection with the sale, purchase or merger of a business. We will never sell your personal information to any other company for marketing purposes.

Retention of your Personal Information

Toro will keep your personal information as long as it is relevant for the above purposes and in accordance with legal requirements. For more information about applicable retention periods please contact legal@toro.com.

Toro's Commitment to Security

Your personal information may be processed in the US or another country which may have less strict data protection laws than your country of residence. Whenever we transfer your information outside of your country of residence, we will take legally required steps to ensure that appropriate safeguards are in place to protect your information and to make sure it is treated securely.

Access and Correction

You may have the right to correct or review your personal data, or object to or restrict the processing of your data. To do so, please contact us by email at legal@toro.com. If you have concerns about the way in which Toro has handled your information, we encourage you to raise this directly with us. Please note that European residents have the right to complain to your Data Protection Authority.



The Toro Warranty

Two-Year or 1,500 Hours Limited Warranty

Conditions and Products Covered

The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly warrant your Toro Commercial product ("Product") to be free from defects in materials or workmanship for 2 years or 1,500 operational hours*, whichever occurs first. This warranty is applicable to all products with the exception of Aerators (refer to separate warranty statements for these products). Where a warrantable condition exists, we will repair the Product at no cost to you including diagnostics, labor, parts, and transportation. This warranty begins on the date the Product is delivered to the original retail purchaser.

* Product equipped with an hour meter.

Instructions for Obtaining Warranty Service

You are responsible for notifying the Commercial Products Distributor or Authorized Commercial Products Dealer from whom you purchased the Product as soon as you believe a warrantable condition exists. If you need help locating a Commercial Products Distributor or Authorized Dealer, or if you have questions regarding your warranty rights or responsibilities, you may contact us at:

Toro Commercial Products Service Department
Toro Warranty Company
8111 Lyndale Avenue South
Bloomington, MN 55420-1196

952-888-8801 or 800-952-2740
E-mail: commercial.warranty@toro.com

Owner Responsibilities

As the product owner, you are responsible for required maintenance and adjustments stated in your *Operator's Manual*. Repairs for product issues caused by failure to perform required maintenance and adjustments are not covered under this warranty.

Items and Conditions Not Covered

Not all product failures or malfunctions that occur during the warranty period are defects in materials or workmanship. This warranty does not cover the following:

- Product failures which result from the use of non-Toro replacement parts, or from installation and use of add-on, or modified non-Toro branded accessories and products.
- Product failures which result from failure to perform recommended maintenance and/or adjustments.
- Product failures which result from operating the Product in an abusive, negligent, or reckless manner.
- Parts consumed through use that are not defective. Examples of parts which are consumed, or used up, during normal Product operation include, but are not limited to, brake pads and linings, clutch linings, blades, reels, rollers and bearings (sealed or greasable), bed knives, spark plugs, castor wheels and bearings, tires, filters, belts, and certain sprayer components such as diaphragms, nozzles, and check valves.
- Failures caused by outside influence, including, but not limited to, weather, storage practices, contamination, use of unapproved fuels, coolants, lubricants, additives, fertilizers, water, or chemicals.
- Failure or performance issues due to the use of fuels (e.g. gasoline, diesel, or biodiesel) that do not conform to their respective industry standards.
- Normal noise, vibration, wear and tear, and deterioration. Normal "wear and tear" includes, but is not limited to, damage to seats due to wear or abrasion, worn painted surfaces, scratched decals or windows.

Countries Other than the United States or Canada

Customers who have purchased Toro products exported from the United States or Canada should contact their Toro Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact your Authorized Toro Service Center.

Parts

Parts scheduled for replacement as required maintenance are warranted for the period of time up to the scheduled replacement time for that part. Parts replaced under this warranty are covered for the duration of the original product warranty and become the property of Toro. Toro will make the final decision whether to repair any existing part or assembly or replace it. Toro may use remanufactured parts for warranty repairs.

Deep Cycle and Lithium-Ion Battery Warranty

Deep cycle and Lithium-Ion batteries have a specified total number of kilowatt-hours they can deliver during their lifetime. Operating, recharging, and maintenance techniques can extend or reduce total battery life. As the batteries in this product are consumed, the amount of useful work between charging intervals will slowly decrease until the battery is completely worn out. Replacement of worn out batteries, due to normal consumption, is the responsibility of the product owner. Note: (Lithium-Ion battery only): Pro-rated after 2 years. Refer to the battery warranty for additional information.

Lifetime Crankshaft Warranty (ProStripe 02657 Model Only)

The ProStripe which is fitted with a genuine Toro Friction Disc and Crank-Safe Blade Brake Clutch (integrated Blade Brake Clutch (BBC) + Friction Disc assembly) as original equipment and used by the original purchaser in accordance with recommended operating and maintenance procedures, are covered by a Lifetime Warranty against engine crankshaft bending. Machines fitted with friction washers, Blade Brake Clutch (BBC) units and other such devices are not covered by the Lifetime Crankshaft Warranty.

Maintenance is at Owner's Expense

Engine tune-up, lubrication, cleaning and polishing, replacement of filters, coolant, and completing recommended maintenance are some of the normal services Toro products require that are at the owner's expense.

General Conditions

Repair by an Authorized Toro Distributor or Dealer is your sole remedy under this warranty.

Neither The Toro Company nor Toro Warranty Company is liable for indirect, incidental or consequential damages in connection with the use of the Toro Products covered by this warranty, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under this warranty. Except for the Emissions warranty referenced below, if applicable, there is no other express warranty. All implied warranties of merchantability and fitness for use are limited to the duration of this express warranty.

Some states do not allow exclusions of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Note Regarding Emissions Warranty

The Emissions Control System on your Product may be covered by a separate warranty meeting requirements established by the U.S. Environmental Protection Agency (EPA) and/or the California Air Resources Board (CARB). The hour limitations set forth above do not apply to the Emissions Control System Warranty. Refer to the Engine Emission Control Warranty Statement supplied with your product or contained in the engine manufacturer's documentation.