



Hour Meter Kit

Reelmaster 350-D

Part No. 100-8152

Installation Instructions

Remove Existing Hour Meter

1. Remove the screws securing the control panel. Save the screws for installation.
2. Tip the panel upward to gain access to the back of the hour meter. Disconnect the existing hour meter from the control panel wire harness.
3. Remove the nuts and back cover from the hour meter and slide the hour meter out of the control panel. Discard the hour meter and its parts.
4. Connect the red (positive) wire on the harness to wire number 58 on the control panel wire harness.
5. Connect the black (negative) wire on the harness to wire number 2 on the control panel wire harness.
6. Secure the control panel with the previously removed screws.

Install New Hour Meter

1. Set the new hour meter in the hole on the control panel.
2. Slide the back cover onto the hour meter and secure it with lock nuts.
3. Attach the connector on the wire harness to the hour meter, making sure the positive terminal on the connector is connected to the positive terminal on the hour meter (Fig. 1).

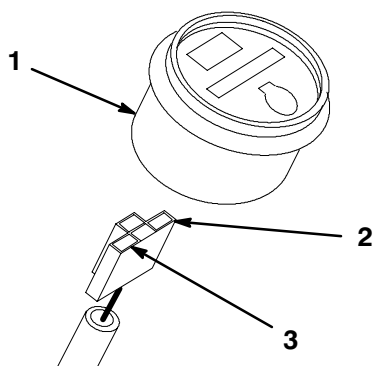


Figure 1

- | | |
|----------------------|----------------------|
| 1. Hour meter | 3. Negative terminal |
| 2. Positive terminal | |