



Folding Windshield Kit

Vista Shuttle Vehicle

Model No. 08220

Form No. 3453-346 Rev A

Installation Instructions

Installation

Loose Parts

Use the chart below to verify that all parts have been shipped.

Description	Qty.	Use
No parts required	—	Prepare the machine.
Windshield assembly	1	Install the folding windshield.
Middle windshield support	1	
Delta-point screw	1	
Spacer	4	
Hex-socket flange head bolt (M6 x 55 mm)	4	
Locknut (M6)	4	


Preparing the Machine

1. Park the machine on a level surface.
2. Engage the parking brake.
3. Shut off the machine and remove the key.



Installing the Folding Windshield

1. Remove the hood.
2. At the indent in the dash, drill a hole (6 mm or 1/4 inch) as shown in [Figure 1](#).

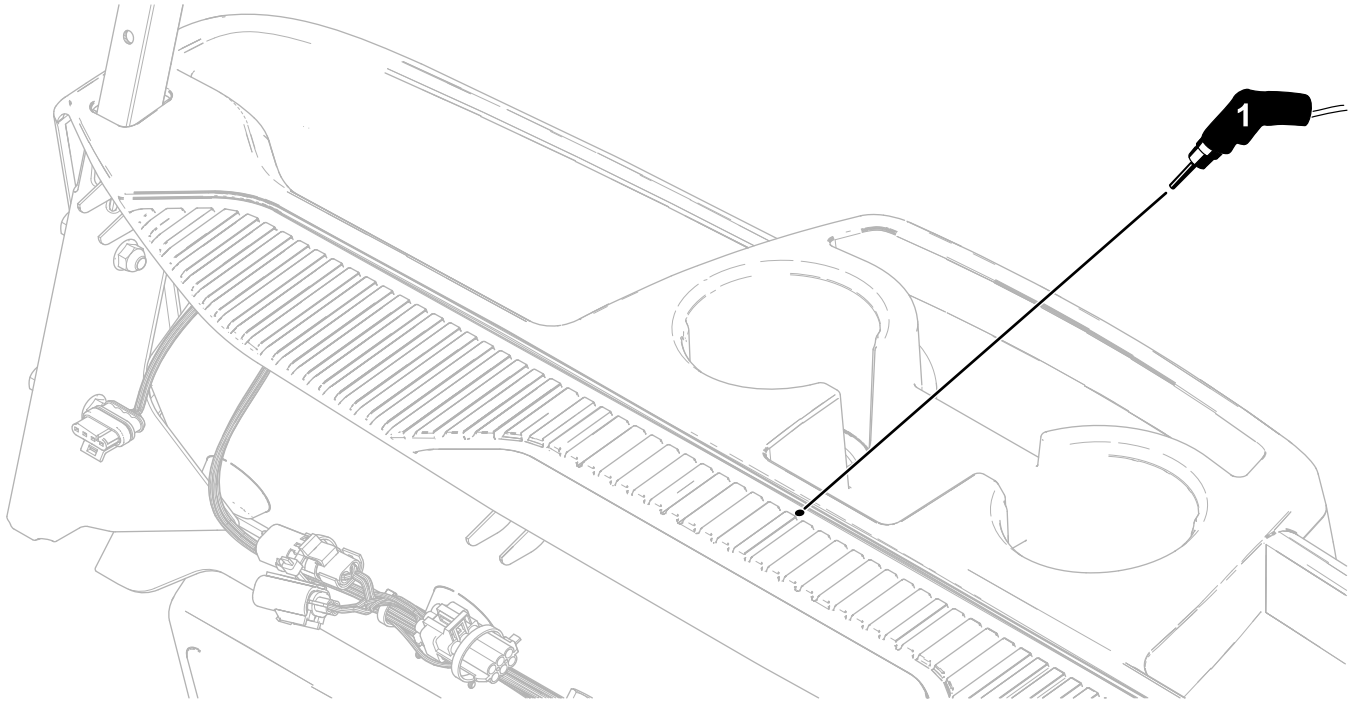

g384988

Figure 1

1. Drill the hole (6 mm or 1/4 inch) here.
-

3. Secure the middle windshield support to the opening in the dash using the delta-point screw ([Figure 2](#)). Torque the delta-point screw to 112 N·cm (10 in-lb).

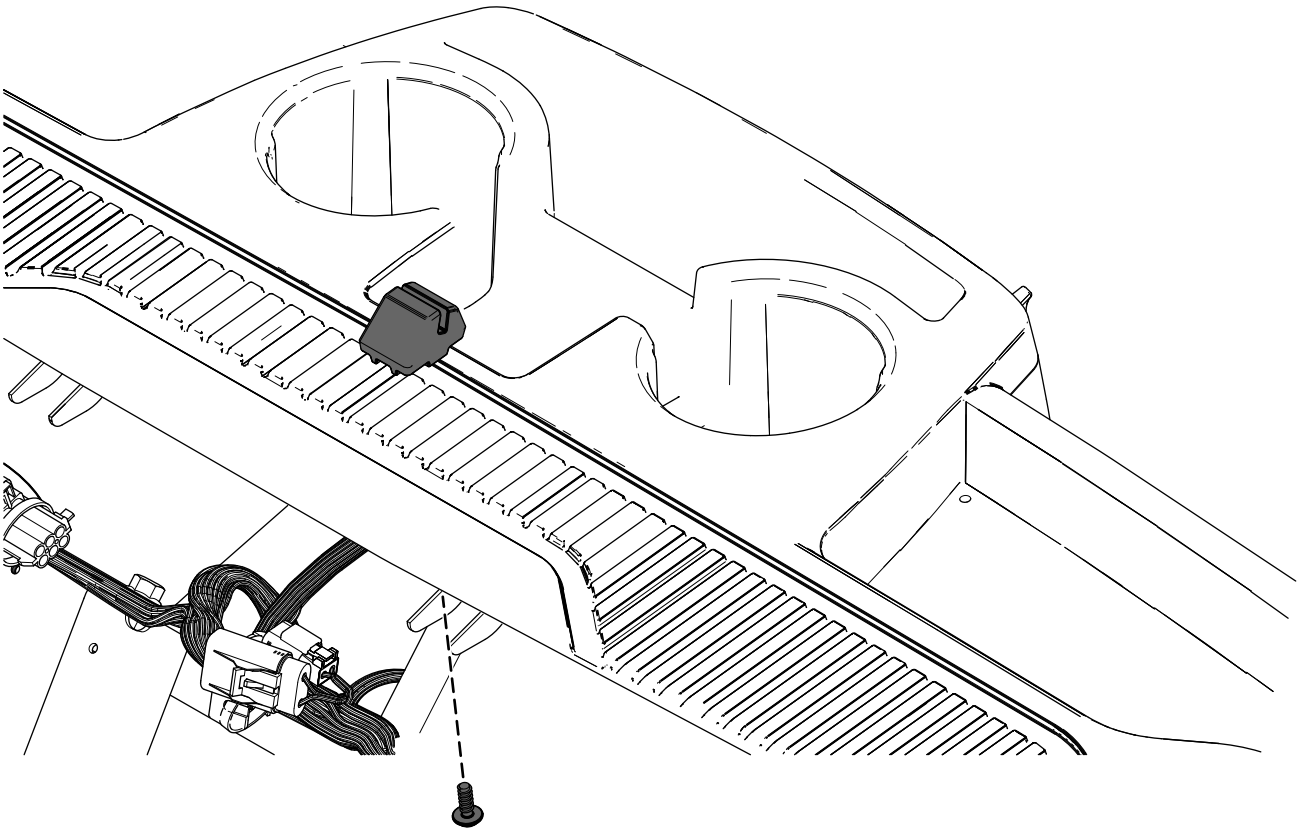


Figure 2

g384989

4. Insert the bottom of the windshield assembly into the middle windshield support.
5. Secure the windshield to the front canopy frame tubes using the 4 hex-socket flange head bolts (M6 x 55 mm), 4 spacers, and 4 locknuts (M6) as shown in [Figure 3](#).
Torque the hex-socket flange head bolts (M6 x 55 mm) to 9 N·m (80 in-lb).
6. Install the hood.

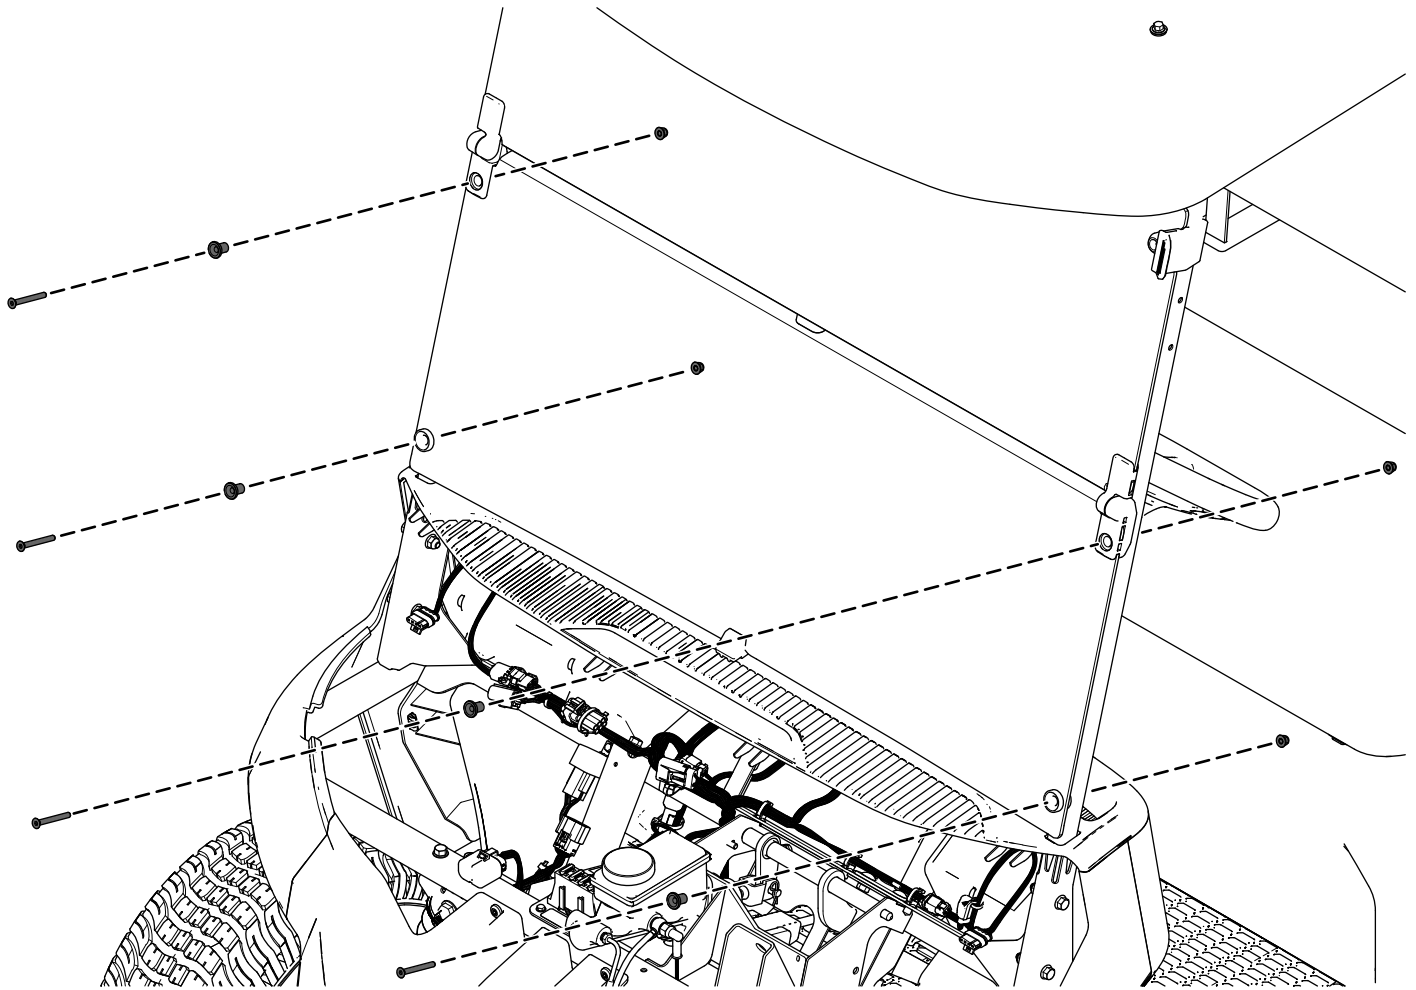


Figure 3

g384990

Operation

Transporting a Machine with the Windshield Installed

When transporting a machine with the folded windshield installed, ensure that you follow these recommendations:

- The machine is facing forward during transportation.
- The folding windshield is secured in the down position using the rubber clamps.
- Do not exceed a vehicle speed of 96 km/h (60 mph).

Maintenance

Cleaning the Windshield

1. Rinse the windshield with lukewarm water.
2. Using a soft cloth or sponge, wash the windshield with mild-detergent soap to clear the dirt and grime.

Important: Do not scrub the windshield with a brush or rough fiber.

3. Rinse the windshield with lukewarm water.
4. Dry the windshield using a soft, microfiber cloth to prevent water spots.