



Side Mirrors Kit

Vista Shuttle Vehicle

Model No. 145-7140

Form No. 3455-304 Rev A

Installation Instructions

Installation

Loose Parts

Use the chart below to verify that all parts have been shipped.

Procedure	Description	Qty.	Use
1	No parts required	–	Prepare the machine.
2	Left mirror Right mirror Mirror mount Locknut (6 mm) Hex-socket head bolt Flange-head bolt (M6 x 40 mm)	1 1 2 8 4 4	Install the side mirrors.

1

Preparing the Machine

No Parts Required

Procedure

1. Park the machine on a level surface.
2. Engage the parking brake.
3. Shut off the machine and remove the key.

2

Installing the Side Mirrors

Parts needed for this procedure:

1	Left mirror
1	Right mirror
2	Mirror mount
8	Locknut (6 mm)
4	Hex-socket head bolt
4	Flange-head bolt (M6 x 40 mm)



Procedure

Note: You can install the mirrors in the upper or lower set of canopy holes. [Figure 1](#) shows an upper installation.

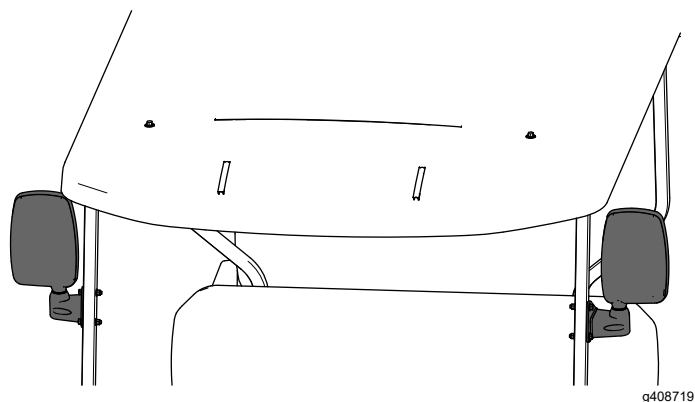


Figure 1

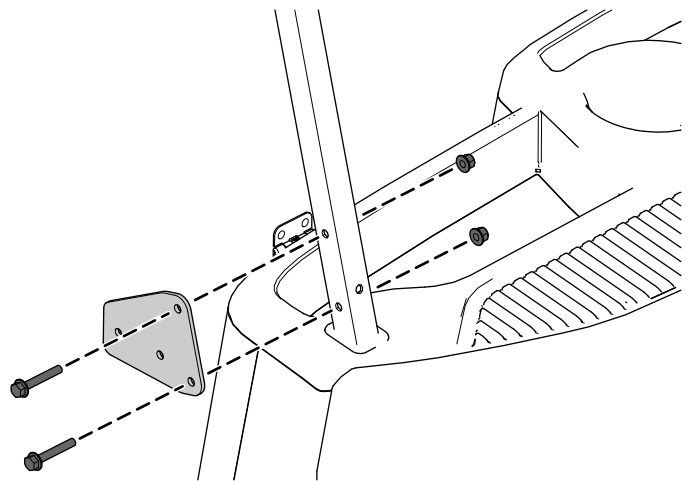


Figure 3
Lower, right installation shown

1. Secure the mirror mount to the canopy tube using 2 flange-head bolts (M6 x 40 mm) and 2 locknuts (6 mm) as shown in [Figure 2](#) or [Figure 3](#).

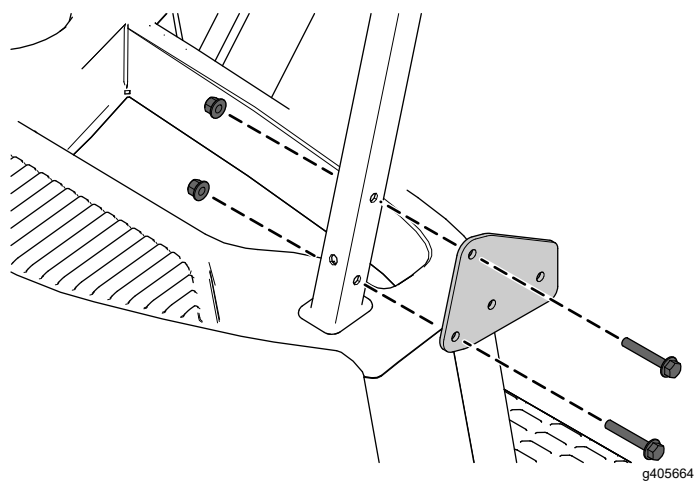


Figure 2
Lower, left installation shown

2. Secure the mirror to the mount using 2 hex-socket head bolts and 2 locknuts (6 mm) as shown in [Figure 4](#) or [Figure 5](#).

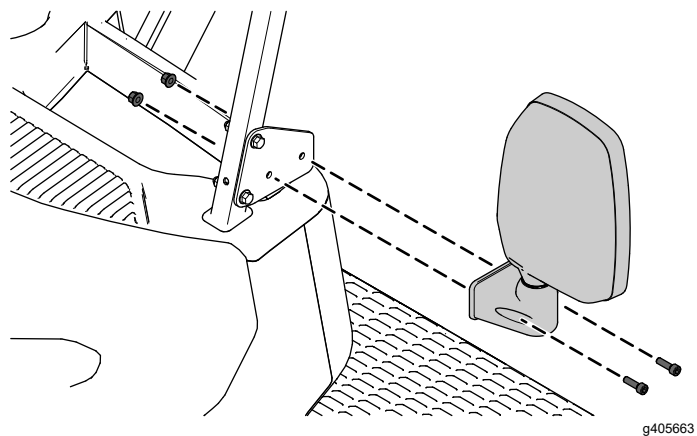


Figure 4
Lower, left installation shown

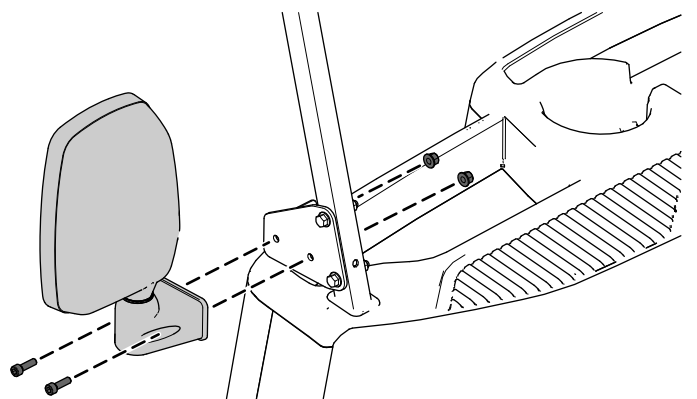


Figure 5
Lower, right installation shown