Form No. 3461-675 Rev A

Quick Connect Hose Adapter Kit

Model No. 145-7646

Installation Instructions

Installation

Preparing the Machine

1. Park the traction unit on a level surface.
2. Ensure that the transmission is in neutral.
3. Lower all attachments (if equipped).
4. Engage the parking brake.
5. Shut off the engine and remove the key.

© 2023—The Toro® Company
8111 Lyndale Avenue South
Bloomington, MN 55420

Register at www.Toro.com.

Original Instructions (EN)
Printed in the USA
All Rights Reserved

3461-675

Installing the Kit

1. Assemble the kit to the machine as shown in Figure 1.

   Important: **Refer to the machine *Operator's Manual* for directions to install hydraulic hoses in the proper hydraulic-flow direction.**

   Ensure that the red dust cap is installed on the extend port and the black dust cap is installed on the retract port.

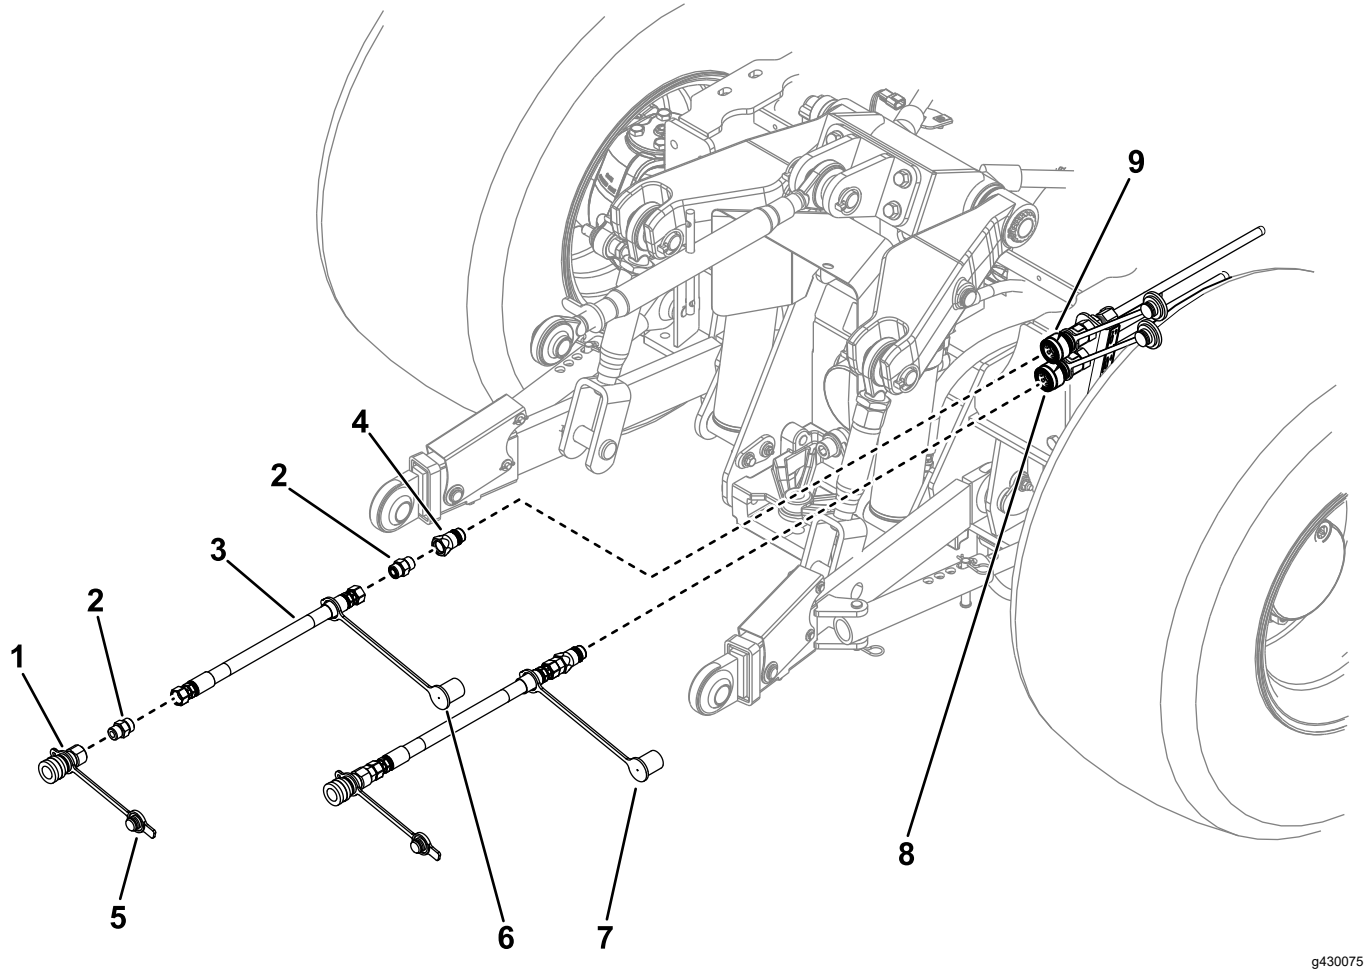


Figure 1

1. Quick-connect coupler
2. Straight fitting
3. Hose
4. Female couple
5. Dust plug
6. Red dust cap
7. Black dust cap
8. Retract port
9. Extend port

Confirming the Correct Attachment Operation

- Pro Sweep® machines: Ensure that the brush rotates in a clockwise direction when viewed from the motor end. If the brush is rotating counterclockwise, reverse the hydraulic hose connections.
- ProPass machines: Ensure that the pressure hose is connected to the extend port and the return hose (which has an inline check valve) is connected to the retract port.
- Other attachments: Refer to the *Operator's Manual* to determine compatibility with the hydraulic system.