



# Wide Angle Mirror Kit

Model No. 133-1009

Form No. 3461-918 Rev A

## Installation Instructions

# Installation

## Loose Parts

Use the chart below to verify that all parts have been shipped.

| Description                        | Qty. | Use                                                                                                              |
|------------------------------------|------|------------------------------------------------------------------------------------------------------------------|
| No parts required                  | –    | Prepare the machine.                                                                                             |
| No parts required                  | –    | Remove the canopy support bracket (for GTX models with a canopy—Model 07921 or 07922).                           |
| Mirror bracket                     | 2    | Install the mirror brackets (for GTX models with a canopy—Model 07921 or 07922).                                 |
| Carriage bolt (1/4 x 3/4 inch)     | 2    |                                                                                                                  |
| Locknut (1/4 inch)                 | 2    |                                                                                                                  |
| Mirror bracket                     | 2    | Install the mirror brackets (for GTX models with a 2-person canopy—Model 07140, or 4-person canopy—Model 07141). |
| Carriage bolt (1/4 x 3/4 inch)     | 2    |                                                                                                                  |
| Locknut (1/4 inch)                 | 2    |                                                                                                                  |
| Carriage bolt (1/4 x 1-1/2 inches) | 2    |                                                                                                                  |
| Mirror bracket                     | 2    | Install the mirror brackets (for Vista models with a canopy).                                                    |
| Carriage bolt (1/4 x 3/4 inch)     | 2    |                                                                                                                  |
| Locknut (1/4 inch)                 | 2    |                                                                                                                  |
| Wide angle mirror                  | 1    | Install the mirror (for GTX and Vista models with a canopy).                                                     |
| Handle knob                        | 2    |                                                                                                                  |
| Carriage bolt (1/4 x 3/4 inch)     | 1    |                                                                                                                  |

## Preparing the Machine

1. Park the machine on a level surface.
2. Engage the parking brake.
3. Shut off the machine and remove the key.

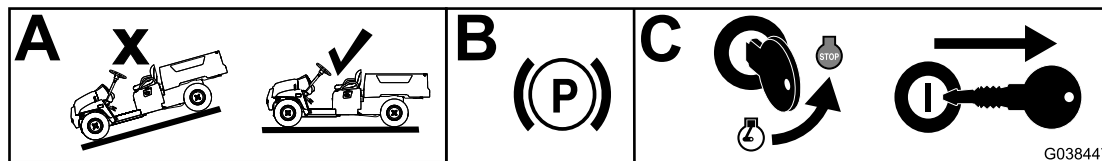


Figure 1



# Removing the Canopy Support Bracket

## For Workman® GTX Models with Canopy Model 07921 or 07922

Remove the canopy support bracket as shown in [Figure 2](#).

**Note:** Retain the support bracket and hardware for later installation.

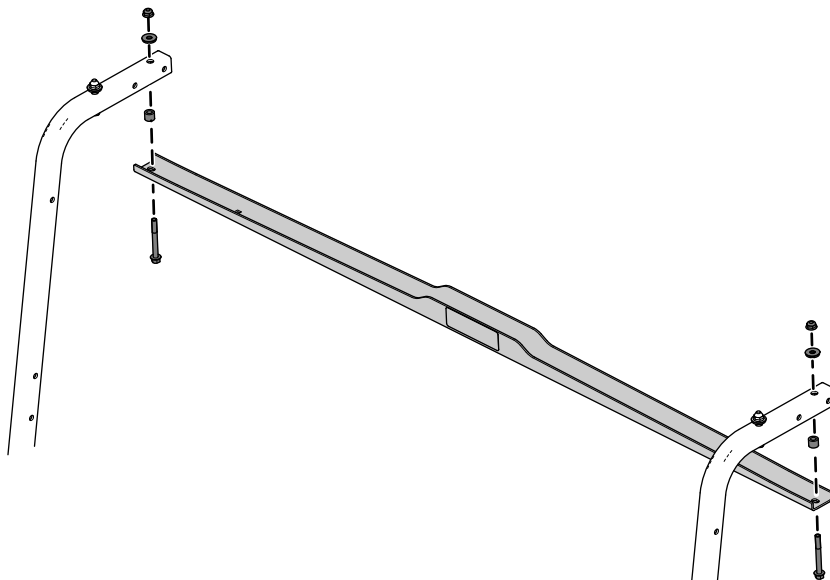


Figure 2

g428963

---

# Installing the Mirror Brackets

## For Workman GTX Models with Canopy Model 07921 or 07922

Install the 2 mirror brackets to the canopy support bracket using the 2 carriage bolts (1/4 x 3/4 inch) and 2 locknuts (1/4 inch) as shown in [Figure 3](#).

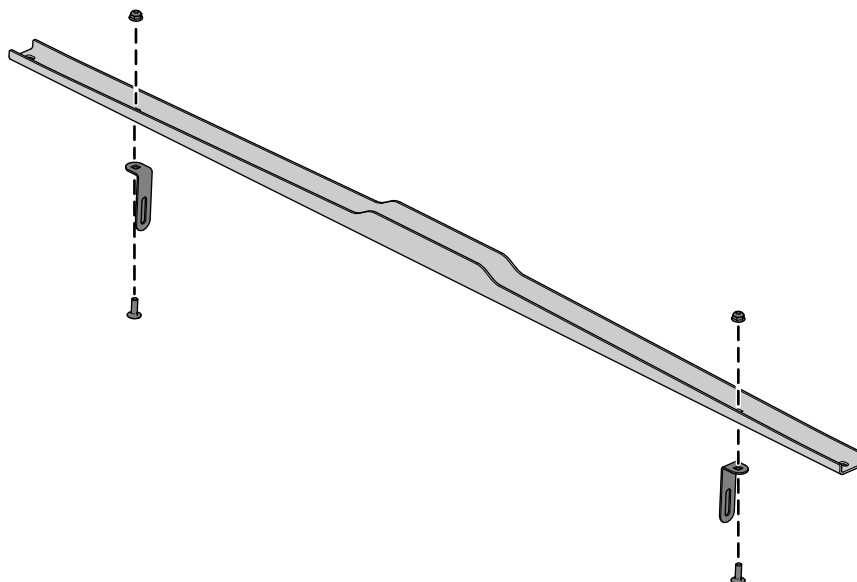


Figure 3

g428962

# Installing the Mirror Brackets

## For Workman GTX Models with 2-Person Canopy Model 07140 or 4-Person Canopy Model 07141

Install the 2 mirror brackets using the 2 carriage bolts (1/4 x 3/4 inch or 1/4 x 1-1/2 inches) and 2 locknuts (1/4 inch) as shown in [Figure 4](#).

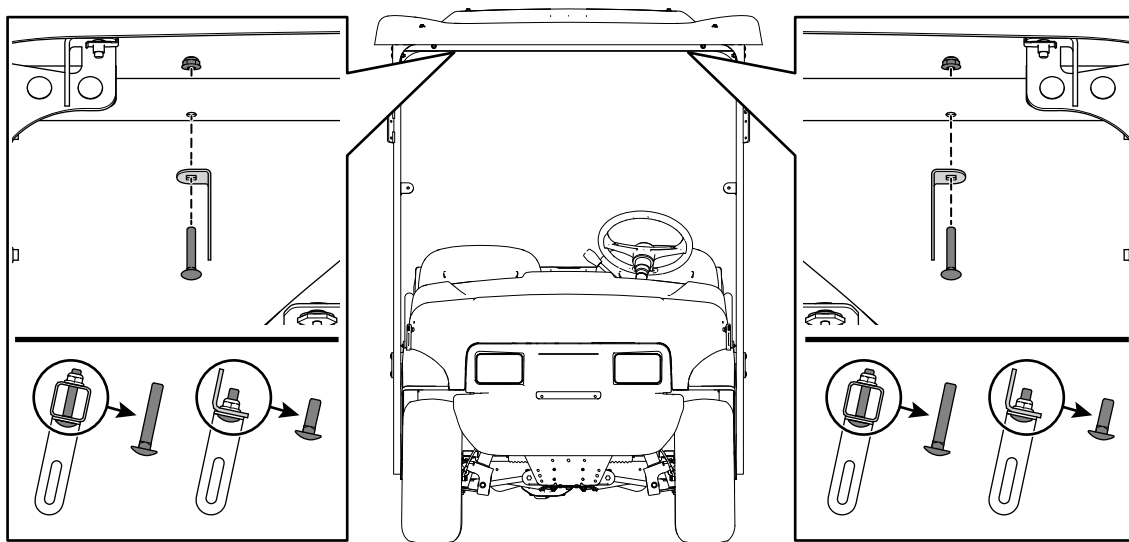


Figure 4

g429250

# Installing the Mirror Brackets

## For Vista™ Shuttle Vehicles with a Canopy

Install the 2 mirror brackets using the 2 carriage bolts (1/4 x 3/4 inch) and 2 locknuts (1/4 inch) as shown in [Figure 5](#).

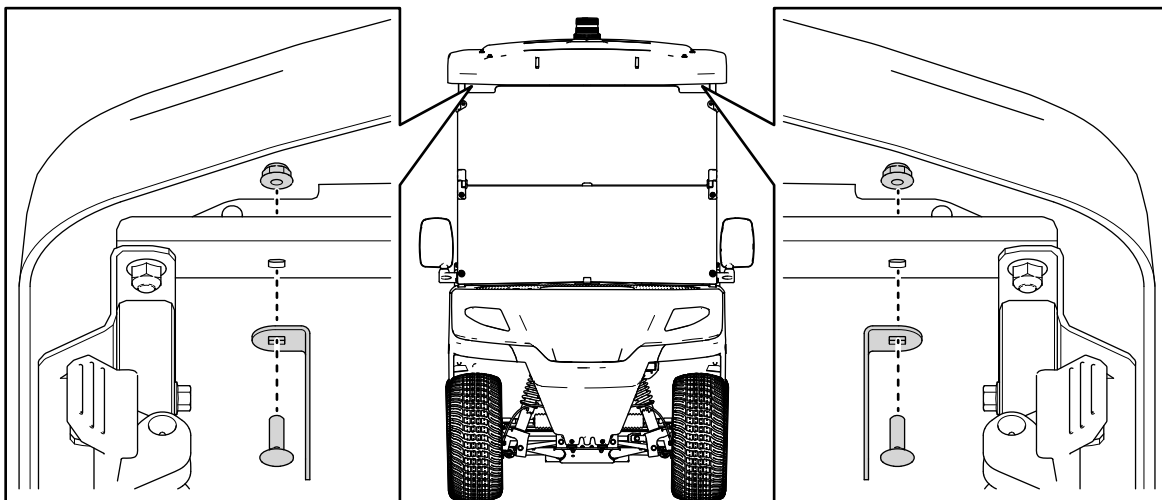


Figure 5

g429217

# Installing the Mirror

## For GTX and Vista Models with a Canopy

1. Slide the mirror onto the mirror bracket (A of [Figure 6](#)).
2. Secure the left side of wide angle mirror to the mirror bracket using a carriage bolt (1/4 x 3/4 inch) and a handle knob (B of [Figure 6](#)).
3. Secure the right side of the wide angle mirror using a handle knob (C of [Figure 6](#)).

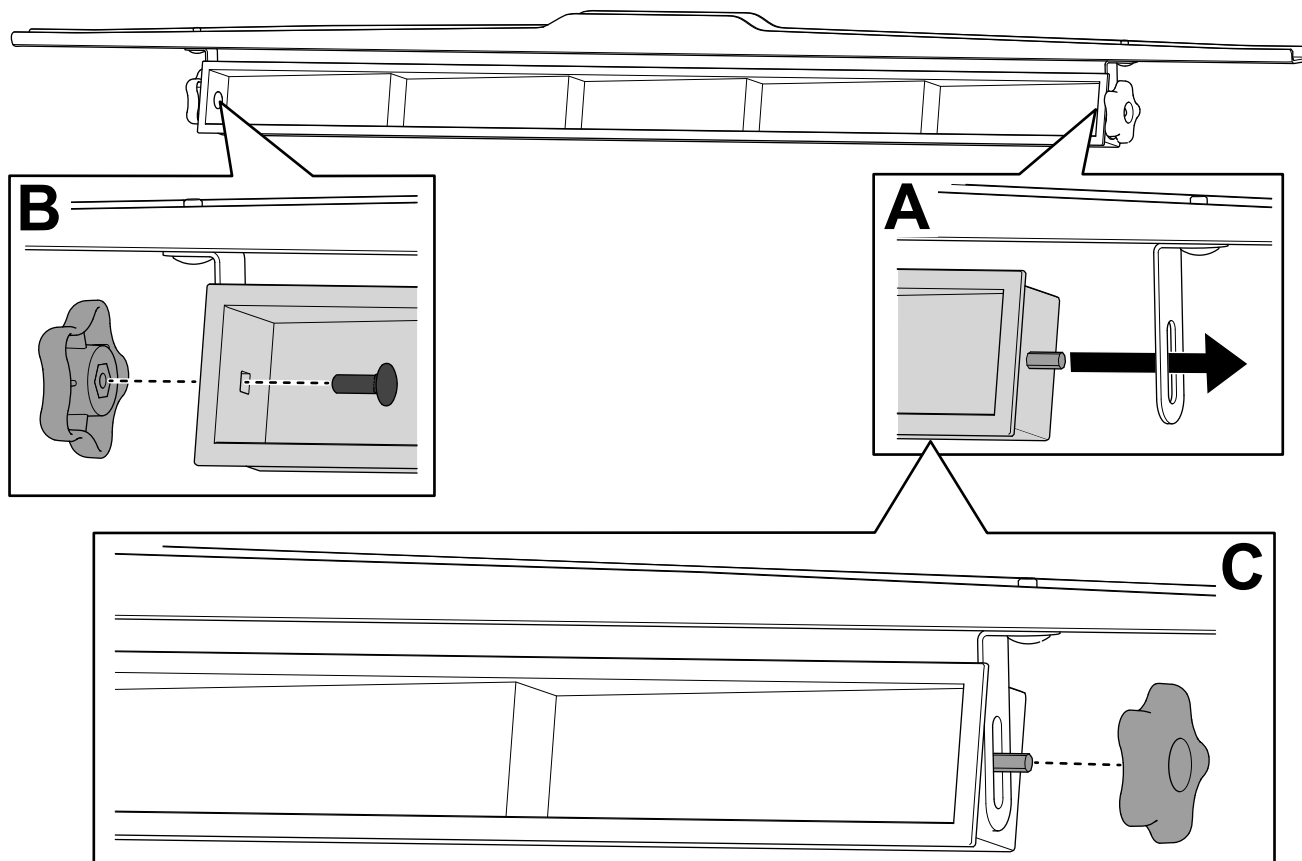


Figure 6

g429249

4. Adjust the height and angle of the mirror; refer to [Adjusting the Height and Angle of the Mirror \(page 5\)](#).
5. If required, install the canopy support bracket to the machine using the previously removed hardware; refer to [Figure 2](#).

# Operation

## Adjusting the Height and Angle of the Mirror

Adjust the height and angle of the mirror as shown in [Figure 7](#).

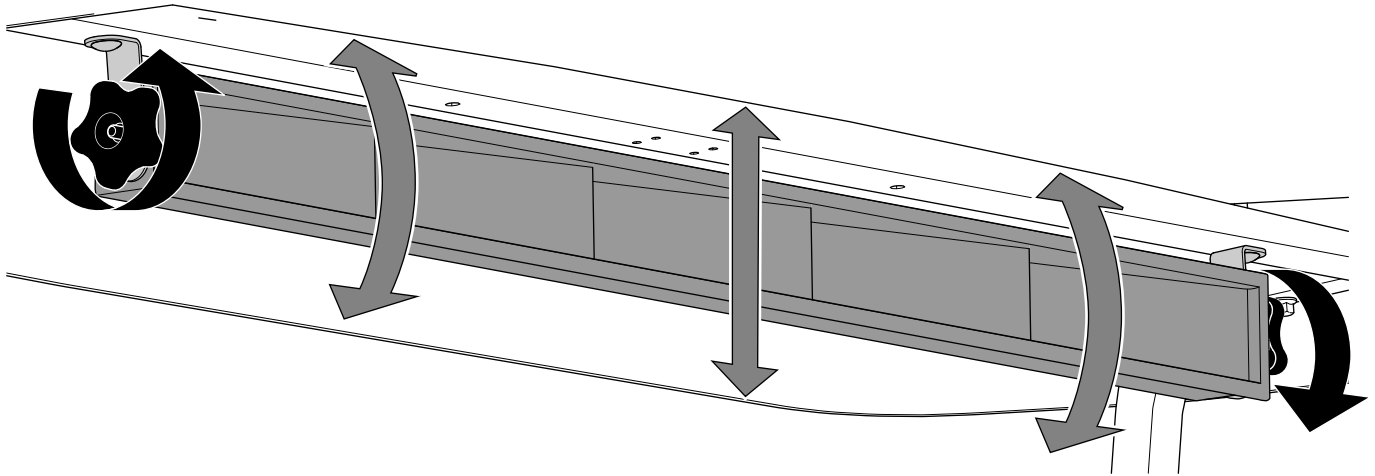


Figure 7

g429252

**Notes:**

**Notes:**



**Count on it.**