



Brush Guard Kit Twister™ Utility Vehicle

Model No. 19051

Model No. 19062

Form No. 3325-225 Rev B

Installation Instructions

1. Position the machine on a level surface. Set the parking brake, turn the ignition off, and remove the key.



Caution



If you leave the key in the ignition switch, someone could accidentally start the engine and seriously injure you or other bystanders.

Remove the key from the ignition switch before you do any maintenance.

2. Remove the existing bumper from the front of the vehicle.
3. Attach the brush guard with 4 new flange bolts and nuts (Fig. 1).

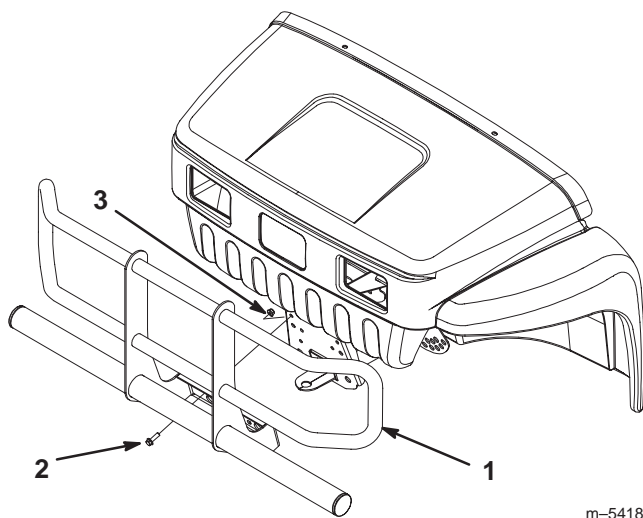


Figure 1

- | | |
|----------------|---------------|
| 1. Brush guard | 3. Flange nut |
| 2. Flange bolt | |