



Count on it.

ຄຸນນະພາບທີ່ບໍ່ມີຄຳສັ່ງ


2 4 Groundsmaster® 3300, 3310 3200

31900—409300000

31901—409300000

31907—407900000

31909—407900000

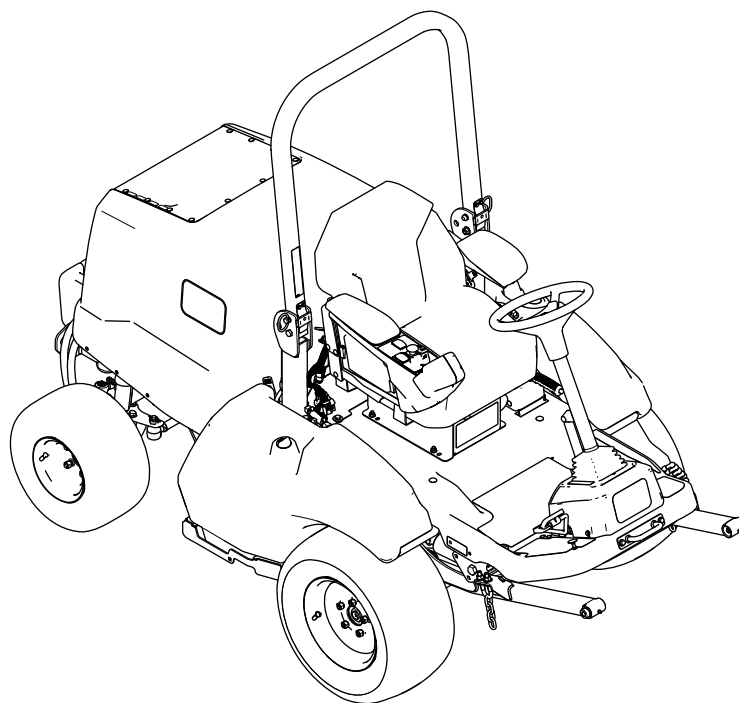


(EPA) , . .



,
 ,
 ,

■ ■

∴, QR () , .

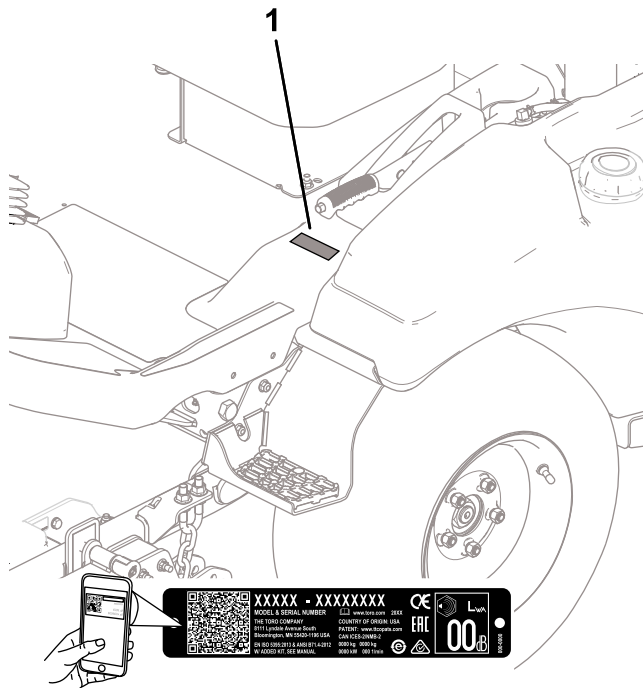

1

g299536

(2), , .



2

g000502

2 . .

.....	6
.....	6
.....	7
.....	17
1	18
2	18
3	20
4	21
5	24
6	25
7	26
8	26
9	27
10	28
11	29
12	29
13	30
14	32
15	32
16 CE Kit	33
17	33
18	39
.....	42
.....	43
.....	45
.....	47
.....	48
.....	49
/	50
.....	51
.....	51
.....	51
.....	51
.....	52
-	53
.....	54
.....	56

.....	58
.....	58
.....	59
PTO	60
Turnaround ().....	60
.....	60
.....	60
.....	60
.....	60
.....	60
.....	64
.....	65
.....	66
.....	66
.....	66
.....	67
.....	68
.....	68
.....	70
.....	71
.....	71
.....	73
.....	73
.....	73
.....	77
.....	79
/	79
/	80
.....	81
.....	83
.....	83
.....	84
.....	84
.....	84
.....	84
.....	85
.....	86
.....	87
.....	87
.....	89
.....	89
PTO	90
.....	91
.....	91
.....	91
.....	91
.....	92
.....	93
.....	93
.....	94
.....	94
.....	96
.....	96
.....	96
.....	99
PTO	99
.....	99
.....	102
.....	102

.....	102
.....	102
.....	104
.....	105
.....	106
.....	106
.....	106
.....	107
.....	108
.....	108
.....	109
.....	110
.....	110
.....	110


31900 31901 ANSI B71.4-2017 EN ISO 5395 CE Kit, .
31907 31909 ANSI B71.4-2017.

- . .
- .
- . ; .
- .
- . .
- . .
- . .
- , . , , .
- ,  , , . .



decalbatterysymbols


- | | |
|------|---------|
| 1. . | 6. . |
| 2. , | 7. — |
| 3. . | 8. . |
| 4. . | 9. . |
| 5. . | 10. ; . |



decal93-7272

93-7272


1. /; —.



decal106-5976

106-5976

- | | |
|--------|--------|
| 1. . | 3. — . |
| 2. — . | 4. —. |

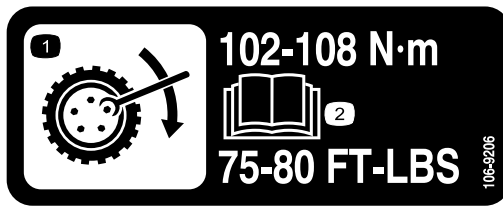

decal106-9206

106-9206


1. —
2. .



decal108-2073

108-2073


1. —.
2. , . , .
3. ; .



115-8155

decal115-8155


1. —; .

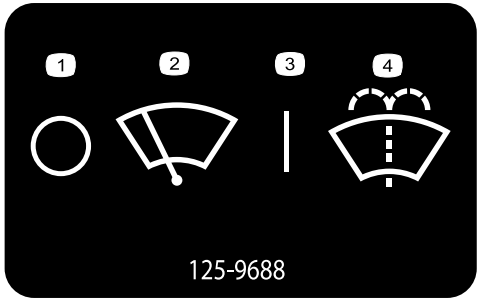

125-9688

decal125-9688


1.
2.
3.
4. .

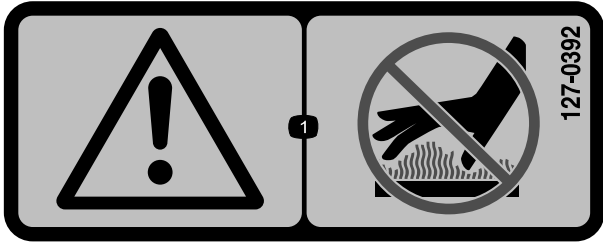

127-0392

decal127-0392

1. —.

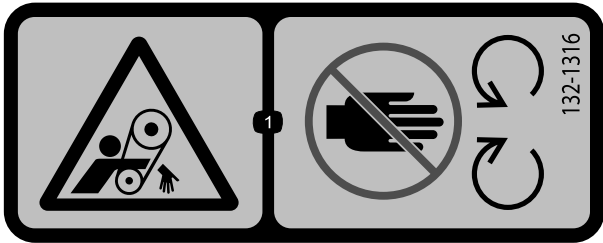

132-1316

decal132-1316

1. , —.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.
For more information, please visit www.ticoCAProp65.com


CALIFORNIA SPARK ARRESTER WARNING

Operation of this equipment may create sparks that can start fires around dry vegetation. A spark arrester may be required. The operator should contact local fire agencies for laws or regulations relating to fire prevention requirements.

133-8062

133-8062


decal133-8062

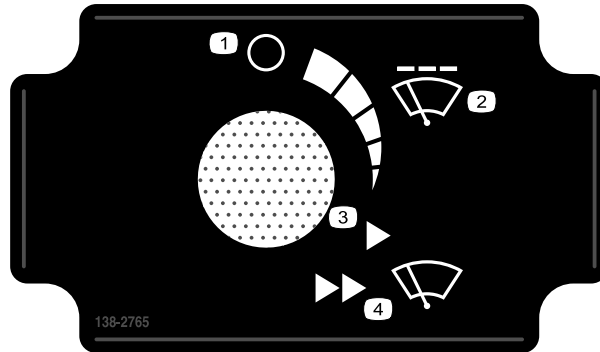

138-2765

decal138-2765


- | | |
|----|------|
| 1. | 3. — |
| 2. | 4. — |

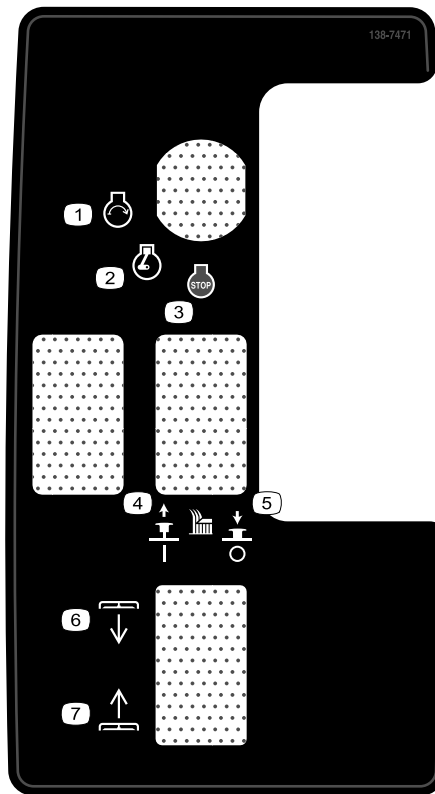

138-7471

decal138-7471

- | | |
|------|------|
| 1. — | 5. . |
| 2. — | 6. — |
| 3. — | 7. — |
| 4. . | |

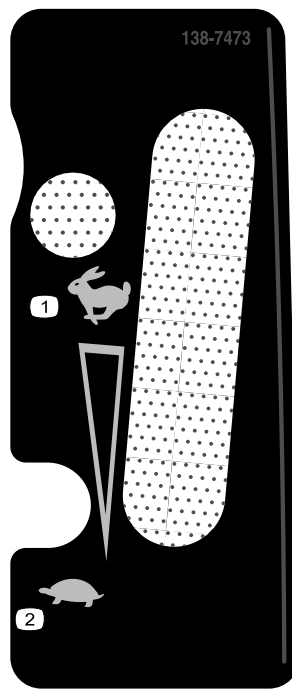


138-7473

decal138-7473

1.

2.

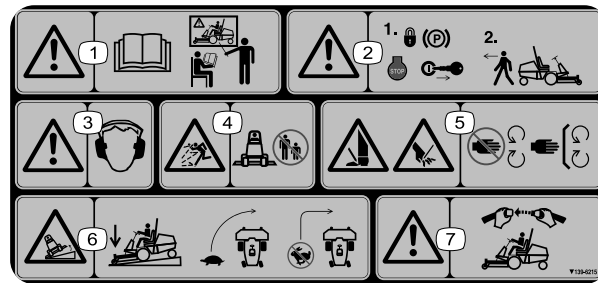

139-6215

decal139-6215

1. —; .

2. —, .


3. —.

4. —.

5. / —; .

6. —; ; .

7. —.




139-6224

decal139-6224

1. —


2. —

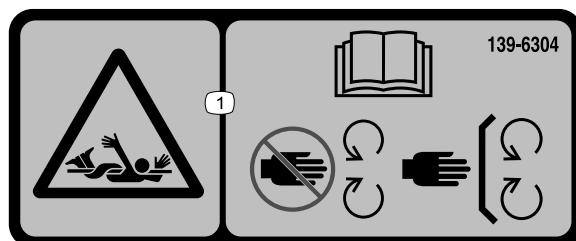

139-6304

decal139-6304


1. —; .

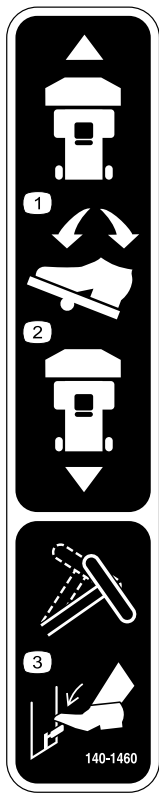

140-1460

decal140-1460


1. , .
2. , .
3. , .

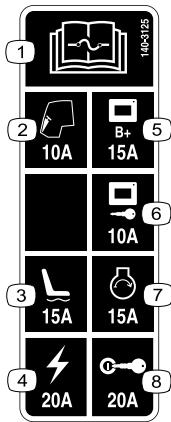

140-3125

decal140-3125

1. .
2. —10 A
3. —15 A
4. —20 A
5. —15 A
6. —10 A
7. —15 A
8. —20 A

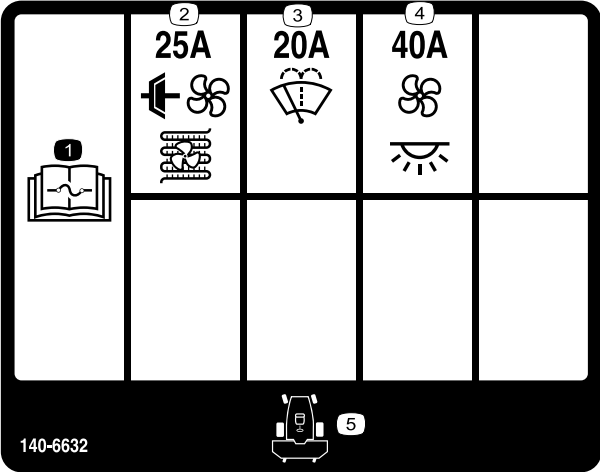

decal140-6632


140-6632

1. .

2. A/C (25 A)

3. (20 A)
4. (40 A)

5.

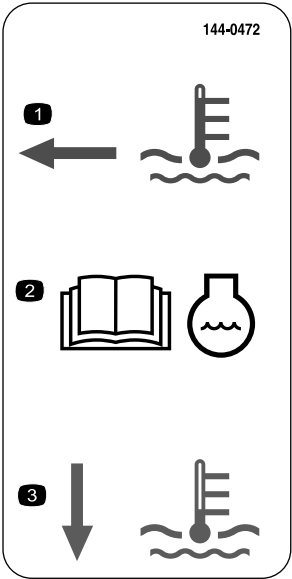

decal144-0472

144-0472

1. .

2. .
3. .

1



CHECK/SERVICE

GM 3200 QUICK REFERENCE AID

1. OIL LEVELS (ENGINE / HYDRAULIC)

2. COOLANT LEVEL

3. TIRE PRESSURE (20psi)

4. BELTS (FAN & HYD.)

5. FUEL - DIESEL ONLY

6. BATTERY

7. GREASE, LUBE POINTS

8. HOOD SCREEN

9. AIR CLEANER

10. ELECTRIC CLUTCH GAP .012"-.024"

11. FUEL/WATER SEPARATOR

12. FUEL FILTER

13. HYDRAULIC OIL FILTER

14. ENGINE OIL FILTER

FLUID SPECIFICATIONS

*See operator's manual for initial changes.

	CAPACITY	*CHANGE INTERVALS
ENGINE OIL	3.5 QT. 2 ¹ / ₂ GAL.	OIL & FILTER 500 HRS.
HYDRAULIC OIL	25 QT. (2WD) 31.5 QT. (4WD)	FILTER 1000 HRS.
FUEL	12 GAL.	FILTER 400 HRS.
COOLANT	7 QT.	1500 HRS.
DRIVESHAFT GREASE	PURGE	WEEKLY

FILTERS

AIR

FUEL

FUEL/WATER

HYD. OIL

ENGINE OIL

PART NO.


108-3811

134-3085

110-9049

86-3010

135-4181

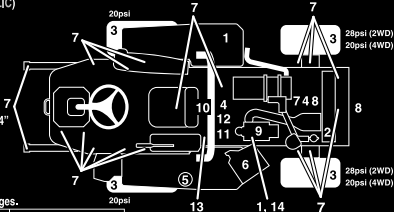

decal144-0518

144-0518

1. .

1



CHECK/SERVICE

GM 3300/3310 QUICK REFERENCE AID

1. OIL LEVELS (ENGINE / HYDRAULIC)

2. COOLANT LEVEL

3. TIRE PRESSURE (20psi)

4. BELTS (FAN & HYD.)

5. FUEL - DIESEL ONLY

6. BATTERY

7. GREASE, LUBE POINTS

8. HOOD SCREEN

9. AIR CLEANER

10. ELECTRIC CLUTCH GAP .012"-.024"

11. FUEL/WATER SEPARATOR

12. FUEL FILTER

13. HYDRAULIC OIL FILTER

14. ENGINE OIL FILTER

FLUID SPECIFICATIONS

*See operator's manual for initial changes.

	CAPACITY	*CHANGE INTERVALS
ENGINE OIL	7 QT. 7 ¹ / ₂ GAL.	OIL & FILTER 500 HRS.
HYDRAULIC OIL	31.5 QT.	FILTER 1000 HRS.
FUEL	12 GAL.	FILTER 400 HRS.
COOLANT	7.25 QT.	1500 HRS.
DRIVESHAFT GREASE	PURGE	WEEKLY

FILTERS

AIR

FUEL

FUEL/WATER

HYD. OIL

ENGINE OIL

PART NO.


108-3810

144-0453

125-2915

86-3010

144-0607

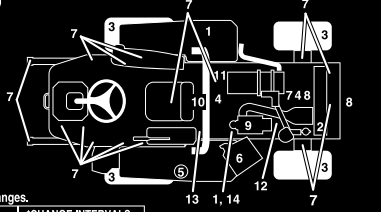


decal144-3950

144-3950

1. .

144-3952: 139-6215 (CE Kit) CE (31900 31901).

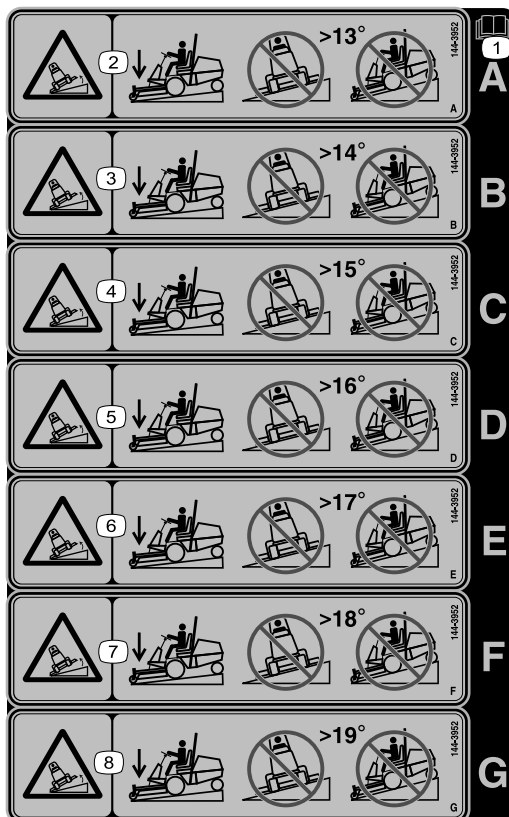

144-3952

decal144-3952

1. . . .

1. .

2. — 13 ; 13 .

3. — 14 ; 14 .

4. — 15 ; 15 .

5. — 16 ; 16 .

6. — 17 ; 17 .

7. — 18 ; 18 .

8. — 19 ; 19 .

1		–	(31900, 31901 31907).
2	(2) (2) ($\frac{5}{8}$ x 1- $\frac{1}{4}$) (2) (2) (4)	2 2 2 2 2 8	(31900, 31901 31907).
3		–	(31900, 31901 31907).
4	($\frac{3}{8}$ x 2- $\frac{3}{4}$) ($\frac{3}{8}$) ($\frac{3}{8}$ x 1- $\frac{1}{4}$)	1 1 2 2 6 2 1 2 2 2	(31900, 31901 31907).
5		–	(31900, 31901 31907)
6	($\frac{3}{8}$ x 3- $\frac{1}{4}$) ($\frac{3}{8}$)	1 2 2	(31900, 31901 31907).
7	(, Toro)	1	(31900, 31901 31907)
8		1 1	(31900, 31901 31907)
9	(144-0512)	1	(31907 31909).
10	($\frac{3}{8}$ x 2- $\frac{3}{4}$) ($\frac{3}{8}$ x 3- $\frac{1}{4}$) ($\frac{3}{8}$)	1 2 4 6	(31900, 31901 31907)
11		–	(31900, 31901 31907).
12		–	(31900, 31901 31907)
13	(, Toro) ($\frac{3}{8}$) ($\frac{3}{8}$) ($\frac{3}{8}$)	1 2 2 2	.

14		—	.
15		—	.
16	CE Kit (, Toro)	1	CE Kit (CE).
17	—19 (42) □ —6 (15) □ () —11 (25) □	1	().
18		—	().

1

31900, 31901 31907

1. .
2. .
3. .
4. ; (55).
5. .
6. .
7. 2 (68).
8. .

2

31900, 31901 31907


:

2	
2	(2)
2	(2)
2	(⁵ ₈ x 1- ¹ ₄) (2)
2	(2)
8	(4)

1. .
2. (⁵₈ x 1-¹₄) 2 .
3. :
 - 2 :

A. (⁵₈ x 1-¹₄).

B. , , (⁵₈ x 1-¹₄) (3).

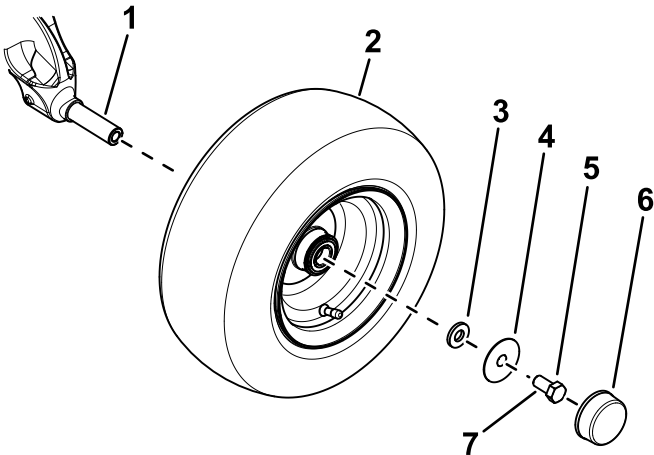


g312833

1.
2.
3.
4.
5. (⁵₈ x 1- ¹₄)
6.
7. .

- C. 203 N·m (150 ft-lb).
- D. (3).

- 4 : 4 (4).

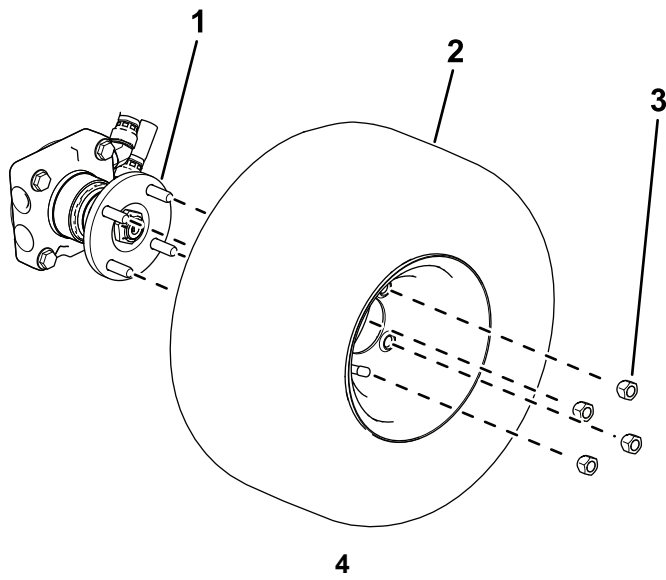

g299549

1.

2.

4

3.


4. ; (89).

3

31900, 31901 31907

∴.

1. (12).

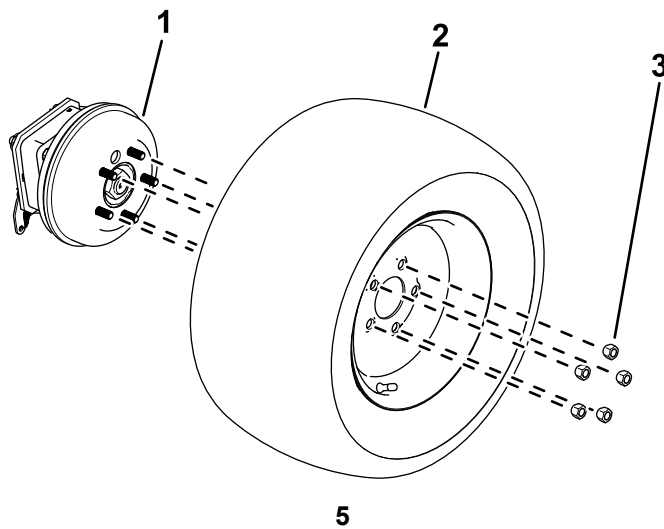

g299550

- 1.
 - 2.
- 3.

2. (12).

4


31900, 31901 31907

:

1	
1	
2	
2	($\frac{3}{8}$ x 2- $\frac{3}{4}$)
6	($\frac{3}{8}$)
2	
1	
2	
2	($\frac{3}{8}$ x 1- $\frac{1}{4}$)
2	

∴

1. .
2. 2 (6).

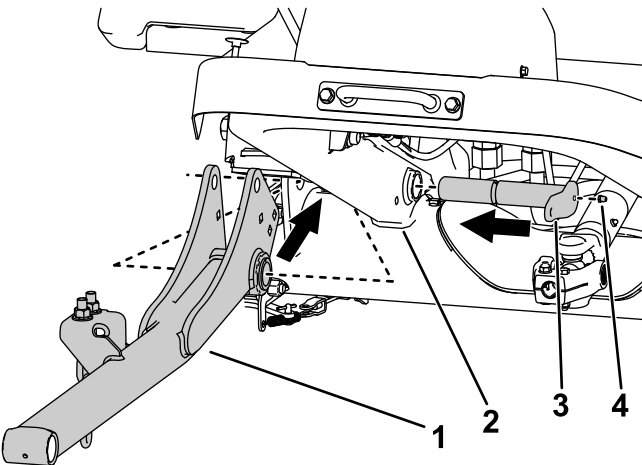


g312023

6

- | | |
|----|----|
| 1. | 3. |
| 2. | 4. |

3. (6).
4. 2 ($\frac{3}{8}$) 2 ($\frac{3}{8} \times 2\text{-}\frac{3}{4}$) (7).

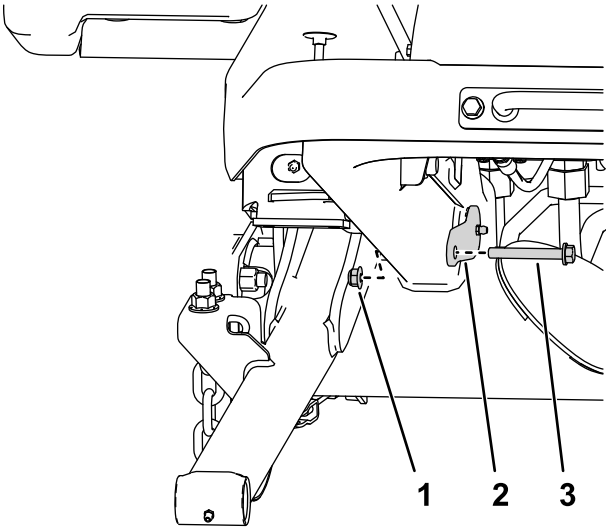


g295767

7

- | | |
|----|----|
| 1. | 3. |
| 2. | |

5. 2 2 ($\frac{3}{8}$) (8).
- ∴

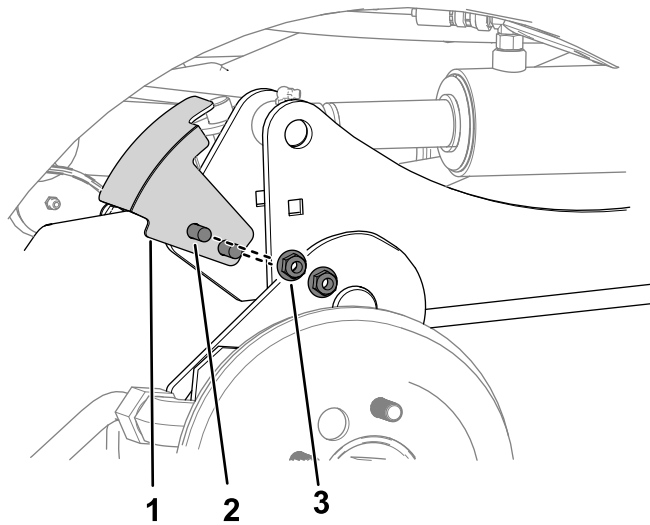


g312028

- 1.
- 2.
3. ($\frac{3}{8}$)

6. :


A. (9).

∴.

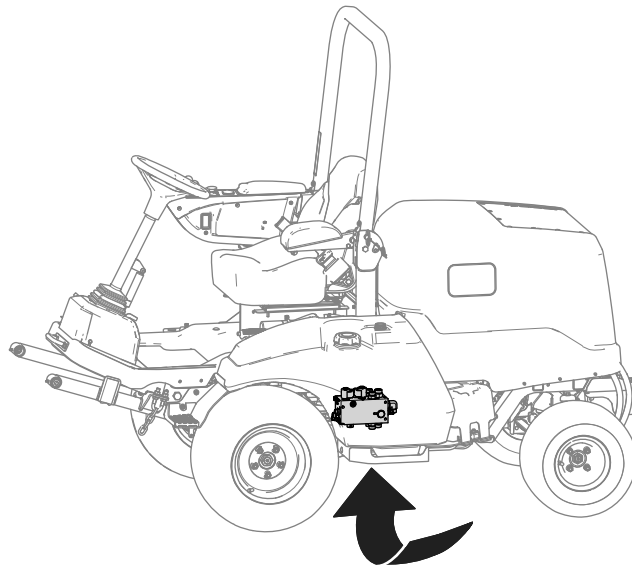

g299920

B. C1 (10).

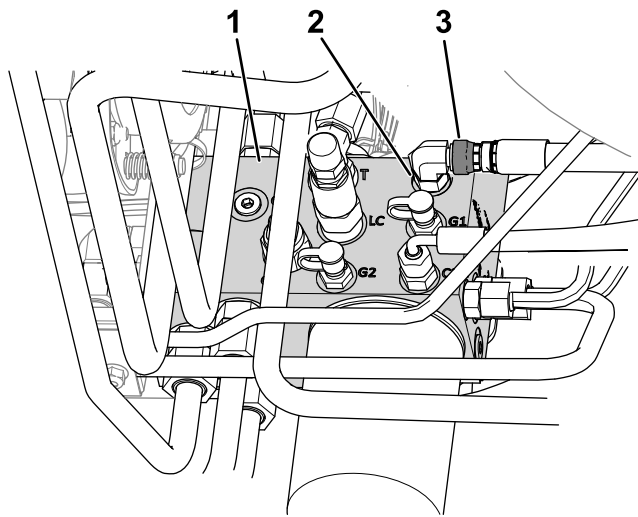

10


g312025

- 1.
2. C1

3.

C. (11).

∴

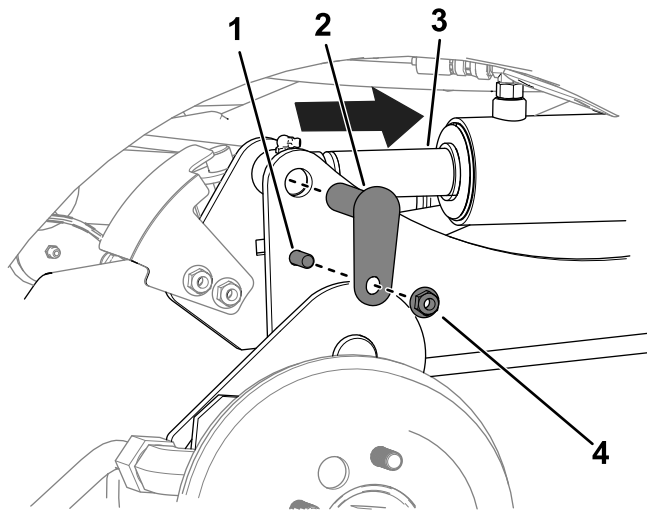

11

g312026

1. ($\frac{3}{8}$ x 1- $\frac{1}{4}$)
- 2.

3.

4. ($\frac{3}{8}$)

D. 2 ($\frac{3}{8}$ x 1- $\frac{1}{4}$), 2 ($\frac{3}{8}$) 2 (11).

E. C1 41 N·m (30 ft-lb).


∴

7. , (71).

5

31900, 31901 31907

1. (12).

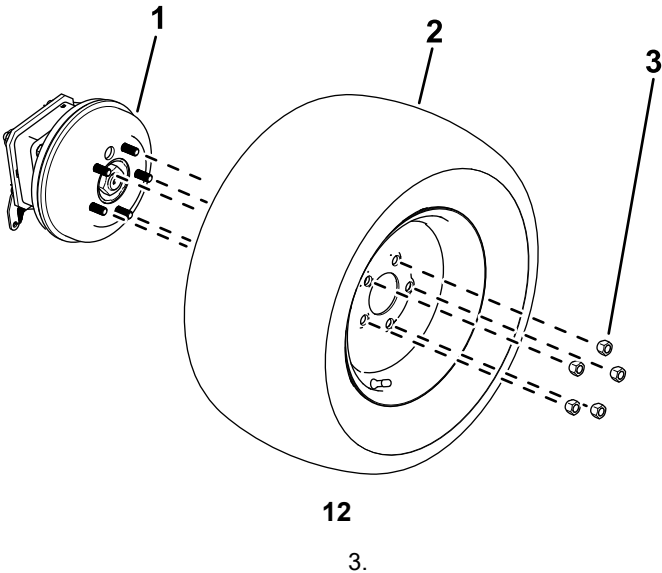

g299550

1.
2.
3.

2. ; (89).


6

31900, 31901 31907

:

1	
2	($\frac{3}{8}$ x 3- $\frac{1}{4}$)
2	($\frac{3}{8}$)

2 ($\frac{3}{8}$ x 3- $\frac{1}{4}$) 2 ($\frac{3}{8}$) (13).

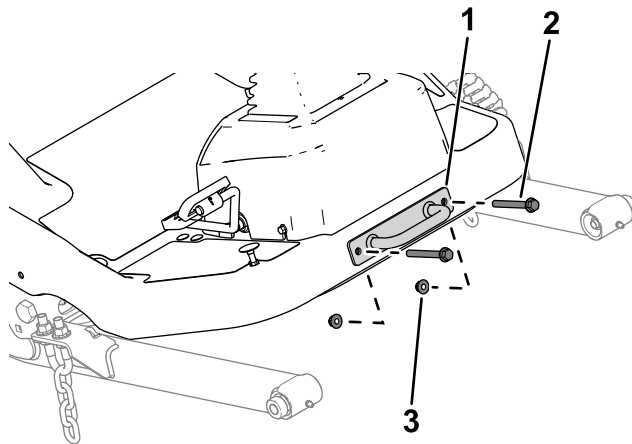

g299562

1.
2.
- 13
3.

7

31900, 31901 31907

:

1	(, Toro)
---	-----------

, .


8

31900, 31901 31907

:

1	
1	

1. (14).

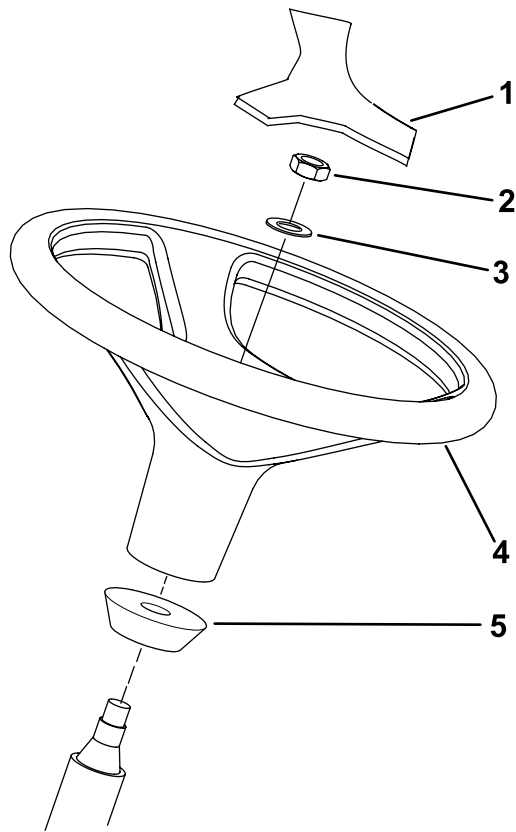

g307379

14

- | | |
|----|----|
| 1. | 4. |
| 2. | 5. |
| 3. | |

2. .
: (14).
3. (14).
4. . 27 35 N·m (20 26 ft-lb).
5. (14).


9

31907 31909

:

1	(144-0512)
---	-------------

31907 31909, (144-0512) 15.

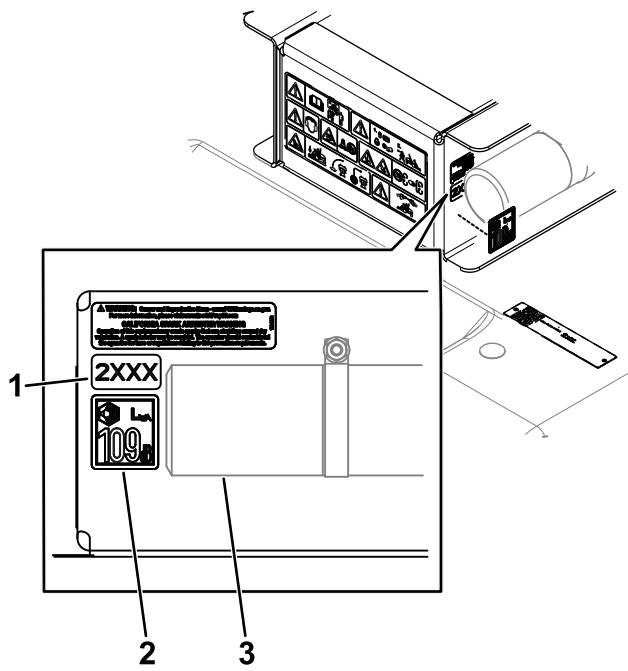

g353549

15

1.
2.
3.



10

31900, 31901 31907

:

1	
2	($\frac{3}{8}$ x 2- $\frac{3}{4}$)
4	($\frac{3}{8}$ x 3- $\frac{1}{4}$)
6	($\frac{3}{8}$)

1. .
2. 4 ($\frac{3}{8}$ x 3- $\frac{1}{4}$) 4 ($\frac{3}{8}$) 16.

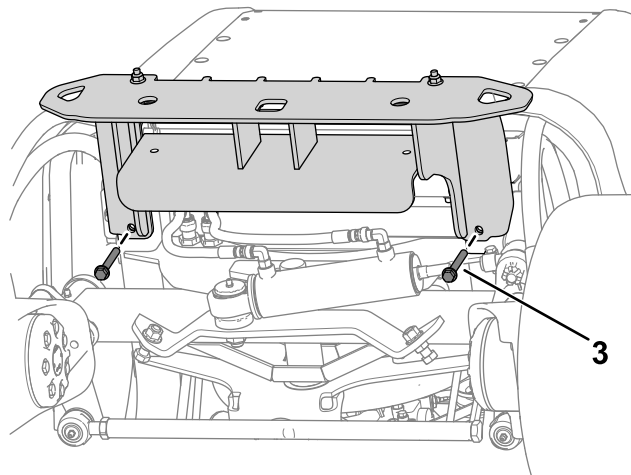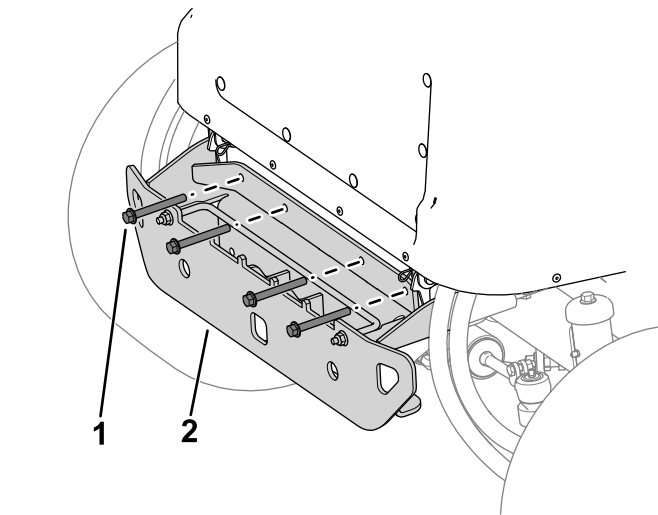

g302775

16

1. ($\frac{3}{8}$ x 3- $\frac{1}{4}$)

2.

3. ($\frac{3}{8}$ x 2- $\frac{3}{4}$)

3. 2 ($\frac{3}{8}$ x 2- $\frac{3}{4}$) 2 ($\frac{3}{8}$) **16**.

4. .

11

31900, 31901 31907

; (55).

12

31900, 31901 31907

; (85).

13

:


1	(, Toro)
2	(³ / ₈)
2	(³ / ₈)
2	(³ / ₈)

: , Toro .

(: , , ,); .

1. , (17) .

: .

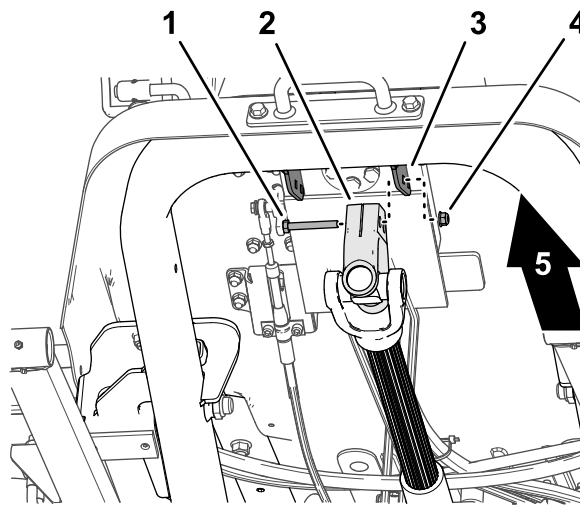

g340623

17


- 1.
- 2.
- 3.
- 4.
- 5.

2. PTO ; PTO (90).

3. , .

4. .

5. (18) .

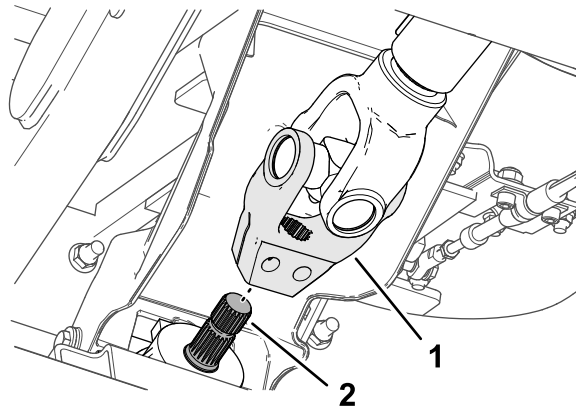


g340624

18

- 1.
- 2.

6. ($\frac{3}{8} \times 2\frac{1}{4}$) ($\frac{3}{8}$) (19) ($\frac{3}{8}$).

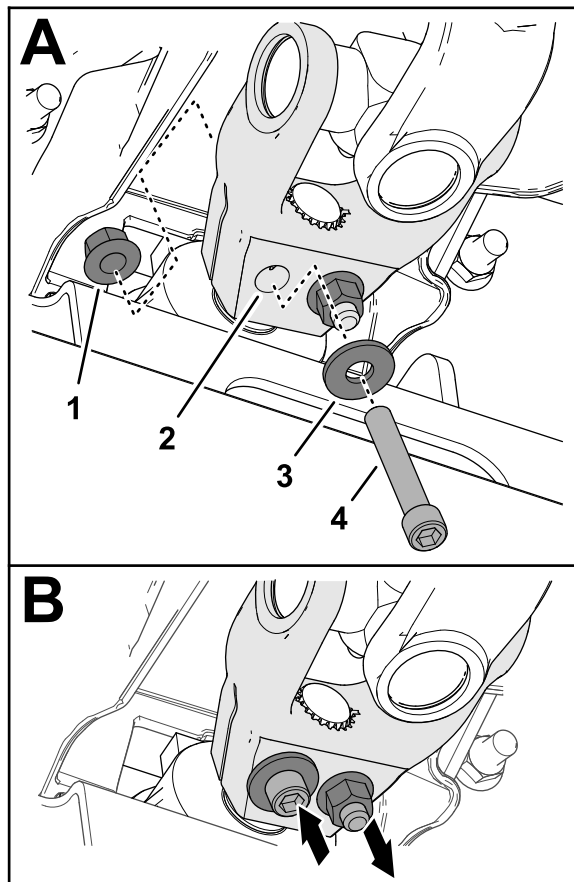

g340626

19

1. ($\frac{3}{8}$)
- 2.
3. ($\frac{3}{8}$)
4. ($\frac{3}{8}$ x 2- $\frac{1}{4}$)

7. ($\frac{3}{8}$ x 2- $\frac{1}{4}$) ($\frac{3}{8}$) (**19**) ($\frac{3}{8}$).
8. 61 N·m (45 ft-lb) .

14

- , (**73**).
- ; (**91**).
- , (**102**).

15

; (51).
:
...

16

CE Kit

:

1	CE Kit (, Toro)
---	------------------

CE, CE Kit; .

17

:



	—19 (42) □
	—6 (15) □
1	()
	—11 (25) □

:



31900	2 (19 42)
31901	1 (19 42)
31907	0
31909	5 (19 42) 2 (6 15)




- . 31900, 31901 31907, .
- , (35).
 - , (37).
- ROPS , .

: CE Kit , . (:).

		19 (42)	6 (15)	11 (25)	
					
31900	31970, 31971, 31974	2	0	0	2
	31970, 31971, 31974	3	0	0	3
	31972, 31973, 31975	3	0	0	3
	31972, 31973, 31975	4	0	0	4
	02835	4	0	0	4
	02835	5	0	0	5
	M-B	4	0	0	4
	MSC23345 31990*	5	2	0	7
	M-B 31990*	5	2	3	10
	Erskine 31990*	5	2	2	9
31901	31970, 31971, 31974	1	0	0	1
	31970, 31971, 31974	2	0	0	2
	31972, 31973, 31975	2	0	0	2
	31972, 31973, 31975	3	0	0	3
	02835	3	0	0	3
	02835	3	0	0	3
	M-B	4	0	0	4
	MSC23345 31990*	5	0	0	5
	M-B 31990*	5	2	3	10
	Erskine 31990*	5	2	2	9
31907	31970, 31971	0	0	0	0
	31970, 31971	0	0	0	0
	31972, 31973	1	0	0	1
	31972, 31973	2	0	0	2
	02835	1	0	0	1
	02835	2	0	0	2
	M-B	1	0	0	1
	MSC23345 31990*	5	2	0	7
	M-B 31990*				
	Erskine 31990*				

(cont'd.)


		19 (42)	6 (15)	11 (25)	
					
31909	31970, 31971	5	2	0	7
	31972, 31973				
	02835				
	MSC23345				
	M-B				
	Erskine				
* 31990 . (:).					

		19 (42)	6 (15)	11 (25)	
					
31900	31970, 31971, 31974	5	0	0	5
	31970, 31971, 31974	5	0		5
	31972, 31973, 31975	5	0		5
	31972, 31973, 31975	5	0		5
	02835	5	0		5
	02835	5	2		7
31901	31970, 31971, 31974	5	2	0	7
	31970, 31971, 31974	5	0		5
	31972	5	0		5
	31973, 31975	5	2		7
	31972, 31973, 31975	5	0		5
	02835	5	2		7
	02835	5	2		7
31907	31970, 31971	5	2	0	7
	31970, 31971	4	0		4
	31972, 31973	5	0		5
	31972, 31973	3	0		3
	02835	3	2		5
	02835	2	0		2

, Toro :

19 (42)

1. .

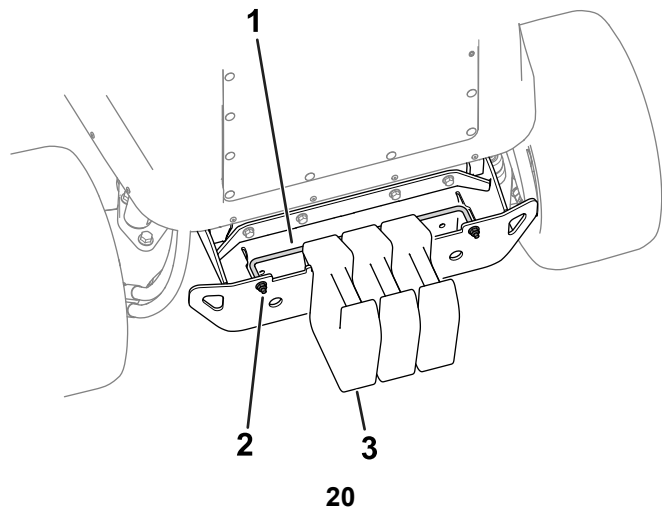

g299565

1.
2.
3. —19 (42)


2. .
3. .

6 (15)

1. Toro :

($\frac{3}{8}$ x 3- $\frac{1}{2}$)	2	116-4701
	2	125-9676
($\frac{3}{8}$)	2	104-8301

2. (21).

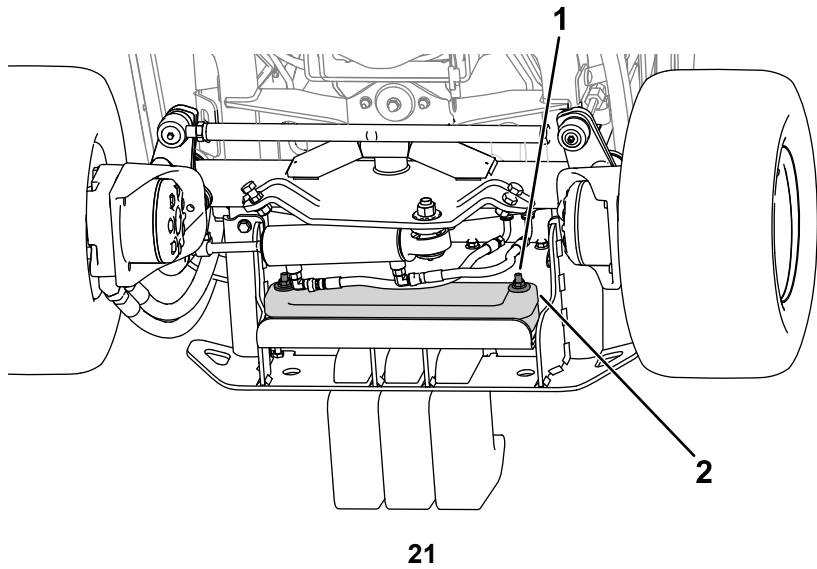

g324822

1.
2. —6 (15)

11 (25)

/ 2 (11 25) :

- 1. Toro (144-0480).
- 2. , .

/ 2 (11 25) : [: 31900 MSC23345 31990]

1. Toro :

(³ / ₈ x 4)	2	323-16
(³ / ₈)	2	3256-3
(11 25)	1	144-0484-03
(2)	1	144-0480

2. :

: 22 .

• :

A. (³/₈ x 4) (³/₈) 3 (22).

B. () (22).

• :


A. (22).

.

B. .

C. (³/₈ x 4) (³/₈) 3 (22).

D. (22).

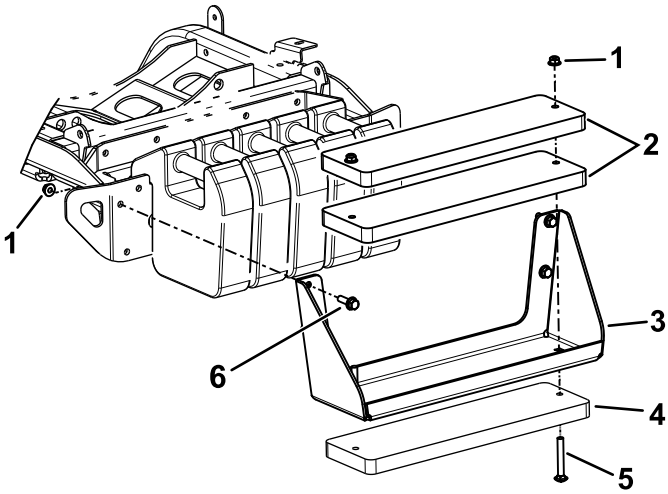

22

- 1. (3256-3)
- 2. ()
- 3.

- 4.
- 5. (323-16)
- 6. ()

g331756

(: ,).

· , , .

• , () .

: , .

• , , , .

: , .


:

1. 10 .

:.

2. , , , .


3. (23).

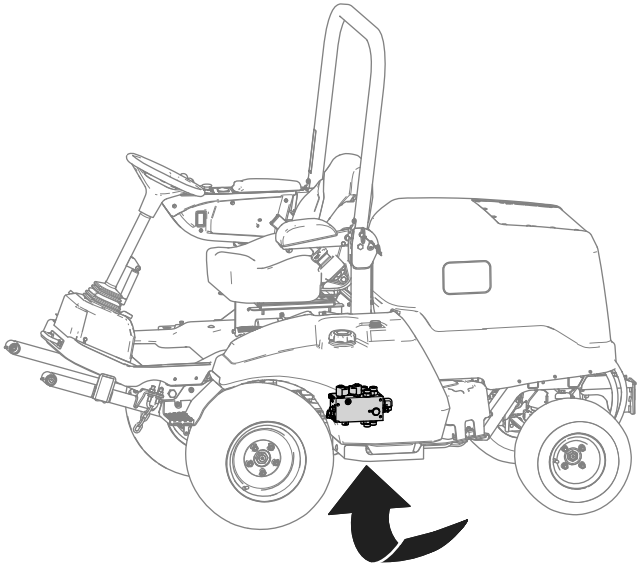

23

g299920

4. (G1; 24).

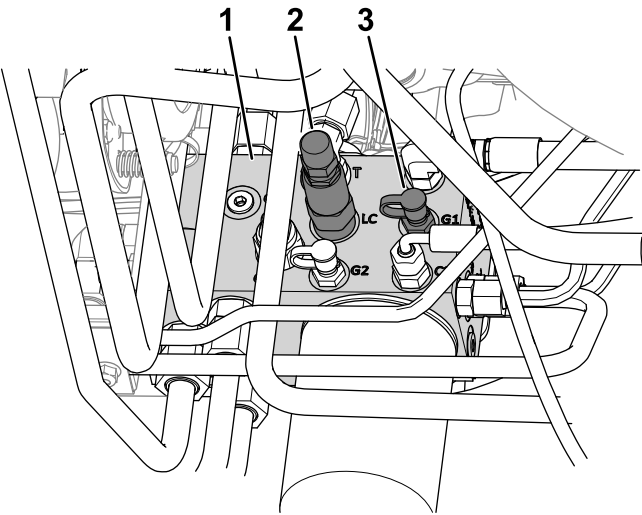

g299924


24

1.
2. (LC)
3. (G1)

5. , (G1; 24).
6. (LC; 24).
7. , .
8. , .
 - .
 - .

	17.24 bar (250 psi)
(02835)	13.79 bar (200 psi)
	17.24 bar (250 psi)
(MSC23345)	13.79 bar (200 psi)
(1.5 5)	17.24 bar (250 psi)

9. .
10. 13 16 N·m (10 12 ft-lb).
11. .
12. .

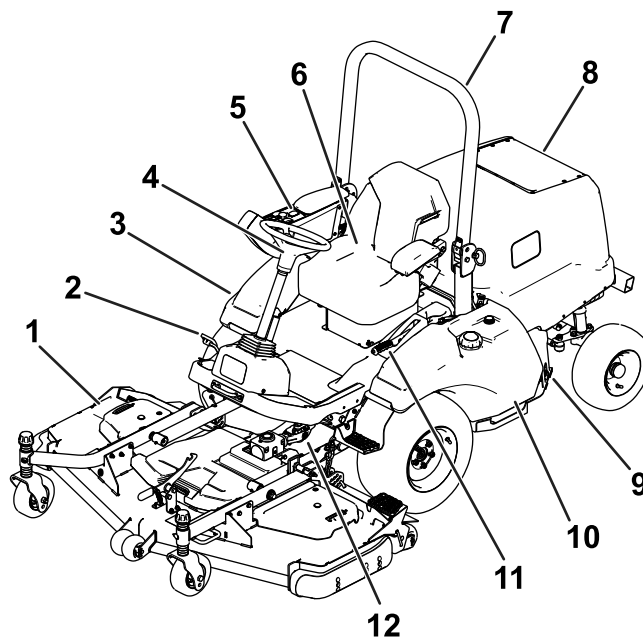

25

- | | |
|----|---------|
| 1. | 7. |
| 2. | 8. / |
| 3. | 9. |
| 4. | 10. |
| 5. | 11. |
| 6. | 12. PTO |


g219621

∴ .
(26) .

- ∴ .
- ∴ .

∴ .
., . ∴

- 31900 31901: 21 / (13)
 - 31907 31909: 24 / (15)
- , (rpm) . , .

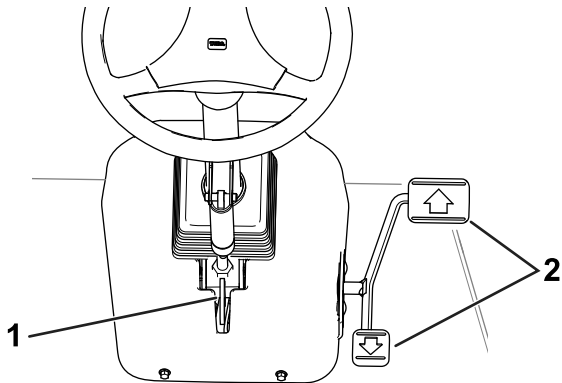


g219608

1. 2.
-

, (26) . .

, (16) .

- : .

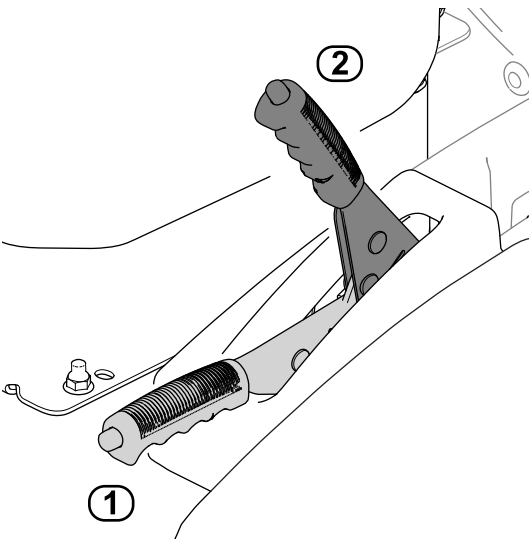

27


g219574

1.

2.

- : .
- : , .

(28).

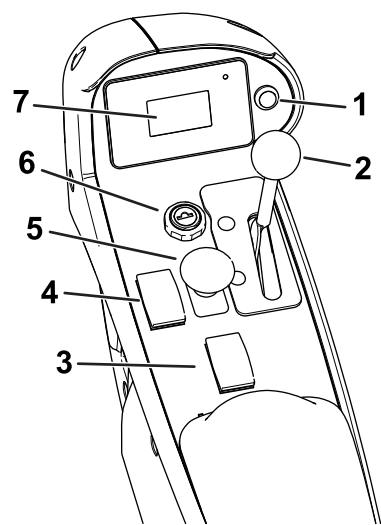

g300409

28

1.

2.

3.

4.
5. PTO

6.

7.

(:) (:).

- : .
- : .
- .

PTO

- PTO: .
- PTO: .

PTO PTO (.

: PTO , , PTO (60).

3 : , / .

[. (59) (60)] [(56)].


- : .
- : .

.

: , .

(56) .

(56).

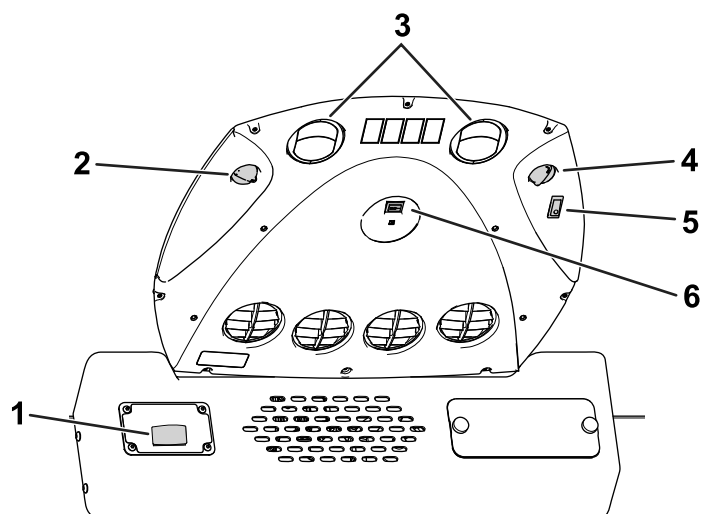

g320790

29

- | | |
|----|----|
| 1. | 4. |
| 2. | 5. |
| 3. | 6. |

(29) .

(29) .


(29) .

(29) .

(29) . .

(29) .

1.

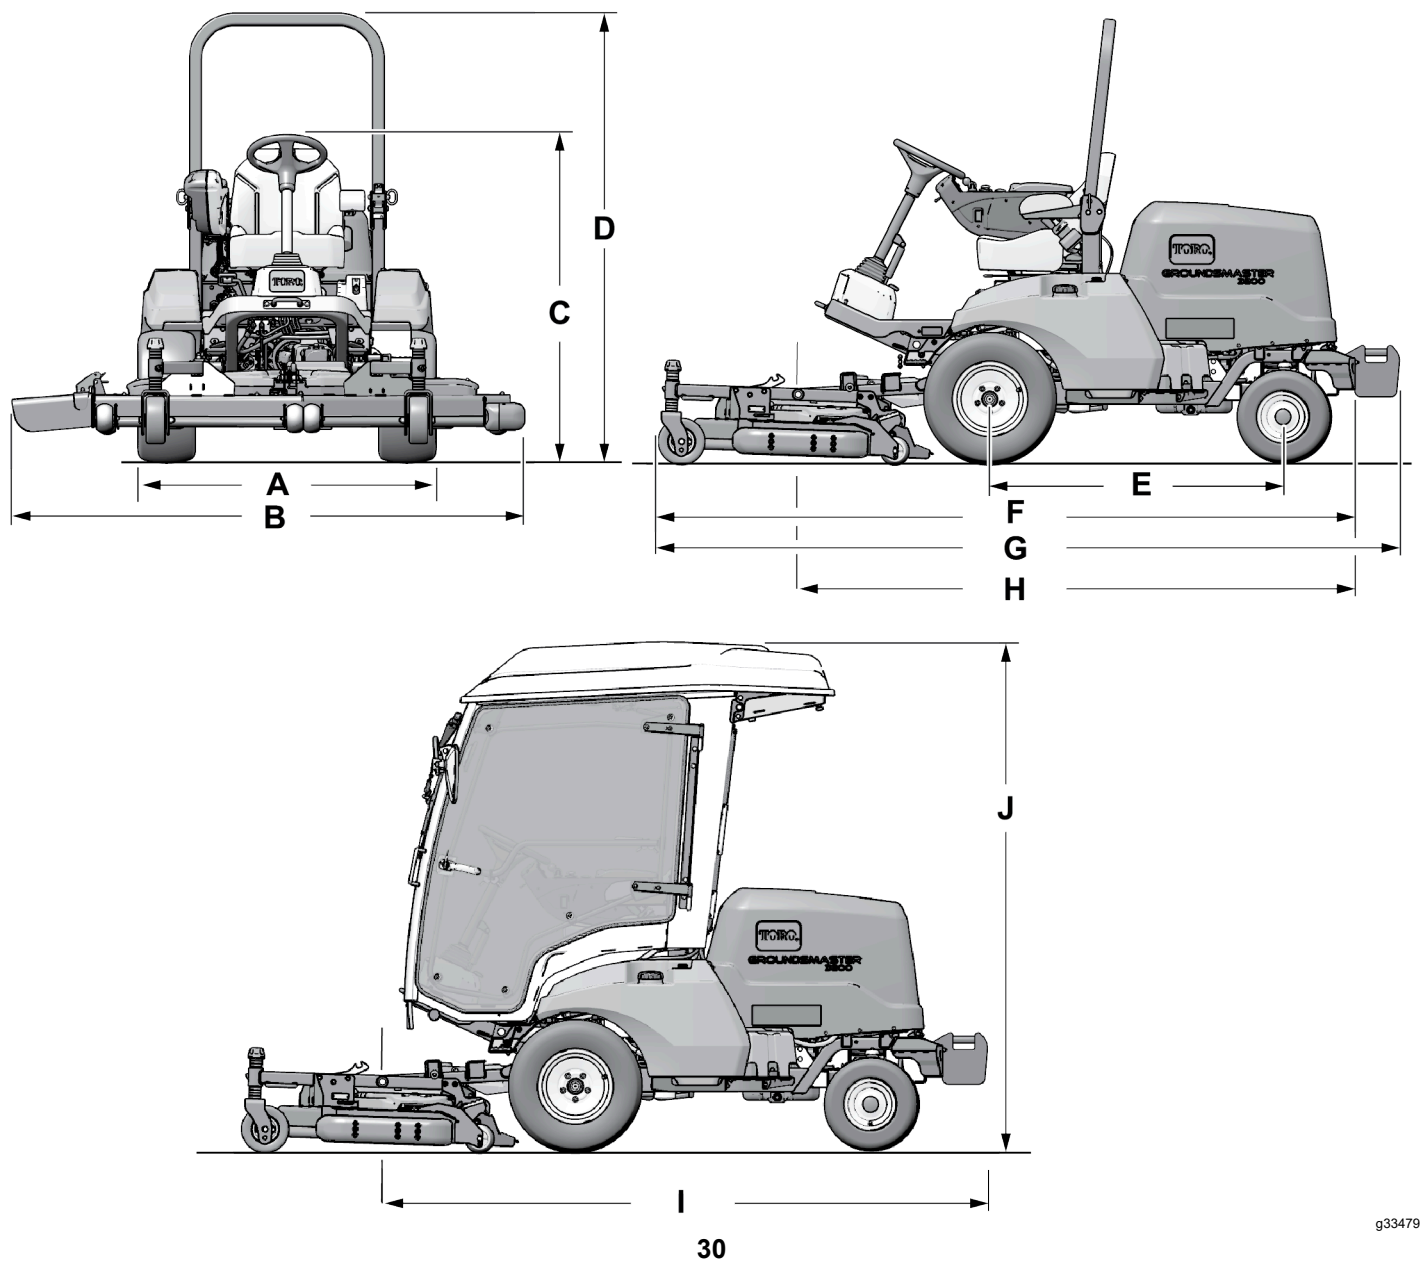

g334796

		30	
		D	200 (79)
		C	111 (44)
(31909)		J	226 (89)
() [31900, 31901 31909]		G	332 (131)
		I	272 (107)
() [31907]		F	312 (123)
		H	253 (99.5)
()		B	(49).
		E	132 (52)
	31900 31901	A	132 (52)
	31907 31909		136 (53.5)
	31900		122 (48)
	31901, 31907 31909		128 (50)
	31900 31901		20 (7.9)
	31907 31909		21 (8-5/16)
	31900		794 (1,751)
	31901		792 (1,747)
	31907		836 (1,843)
	31909		1,106 (2,439)

:

31970	198 (78)
31971	168 (66)
31972	228 (90)
31973	198 (78)
31974	158 (62)
31975	188 (74)
02835 ()	218 (86)

/

Toro . Toro www.Toro.com .
, Toro . .

-
- , .
- , . , , .
- .
- , .
- , . .
- .

- . .
- , .
- .
- .
- .
- , : .
- , : .


- :
- ; (77)
 - ; (73)
 - ; (91)
 - ; (93)
 - ; (102)
 - **PTO**-, (71)

- :
- **(2):**
 - : 1.38 bar (20 psi)
 - : 1.93 bar (28 psi)
 - **(4):** 1.38 bar (20 psi)



- , .
- .
- .

： .
.

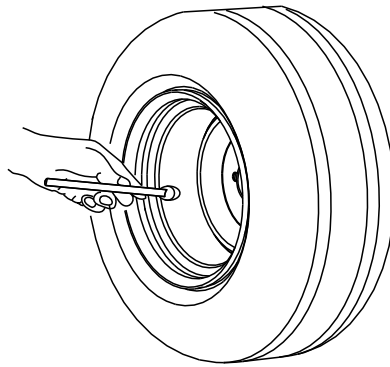

G001055

g001055

31

- ： .
.
• .
• .
• .
• .
• .
• , .
• 180 .

： 40
： (<500 ppm) (<15 ppm)
(2-D) -7°C (20°F) (1-D 1-D/2-D) .
： .
-7°C (20°F) .

B20 (20%, 80%).
： (<15 ppm)
： ASTM D6751 EN14214
： ASTM D975, EN590 JIS K2204


- ： .
：
• .
• B5 (5%) .
• , , .

- .
- , .

: 45 (12)

⌚, ; .

1. (32), ,
2. .
3. .
4. .

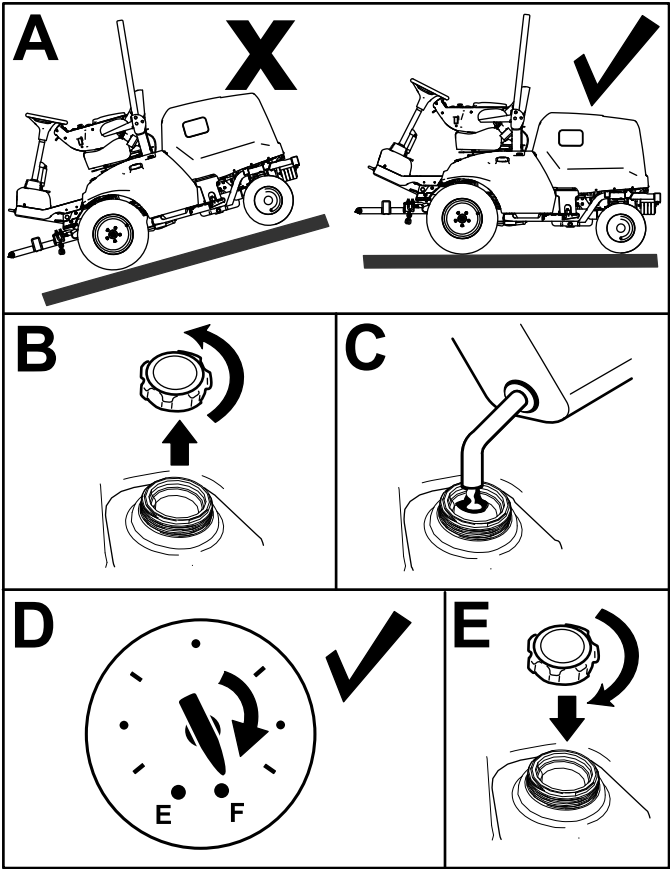

-
- ⌚
- , PTO . , ⌚
- PTO .
- , .
- .



- , .
- .
 - .
1. PTO .
 2. . , 3.
- ∴, -.
3. , PTO . 2 . , 4.
- ∴, - **Toro** .
4. PTO , . 2 . , 5.
- ∴, - **Toro** .
5. . PTO , . 2 . , , .
- ∴, - **Toro** .




- .
- .
 - .




- .
- .
 - .
 - .
 - .
 - .
 - .
 - (∴,) .

- ∴ .
1. , , , .
 2. (33).
 3. (33).




g257846

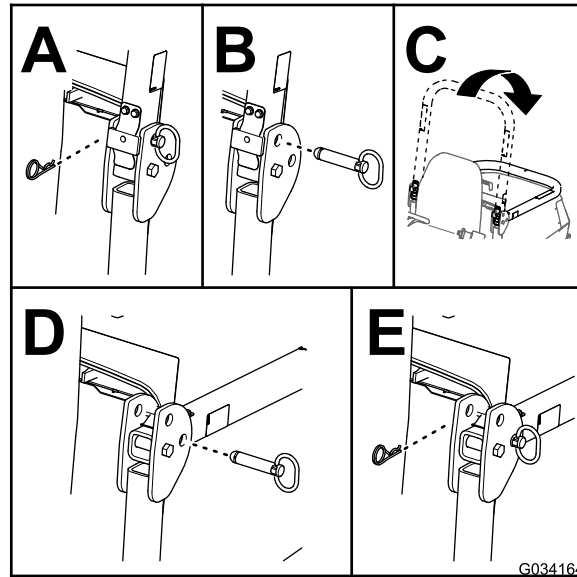

g034164

33


1. , , , .
2. (34).
3. (34).

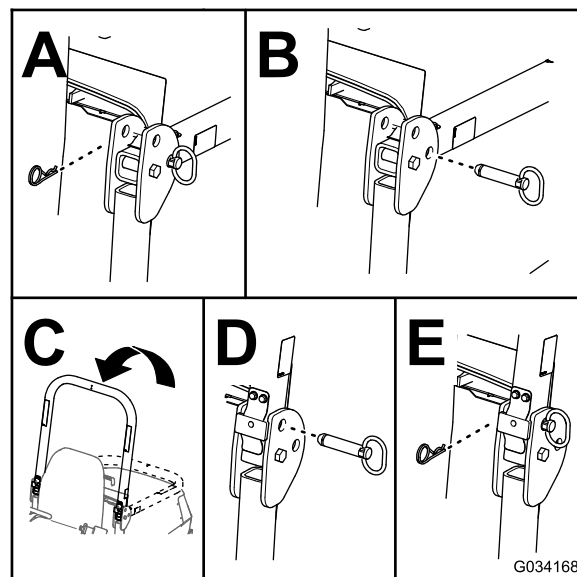

g034168

34

: , . 2 (35) .

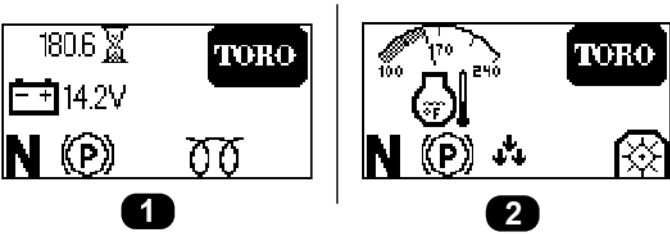


35

g308751

1.
2.

(36) 2 .



36

g297898

1.
2.

- : .
- : .
- (:) .
- (:) : .
- : .

Main Menu ()

Faults ()	. Toro .
SERVICE ()	: . Service () (56) .
DIAGNOSTICS ()	. , / (:) .
SETTINGS ()	InfoCenter. Settings () (56) .
ABOUT ()	, . About () (57) .

Service ()

HOURS ()	, PTO .
COUNTS ()	PTO .

Settings ()

Settings () (cont'd.)

UNITS ()	. .
LANGUAGE ()	.
BACKLIGHT ()	.
CONTRAST ()	.
PROTECTED MENUS ()	PIN (:).
PROTECT SETTINGS ()	, PIN.
TURNAROUND () 	Turnaround ().
SLOPE SENSOR INSTALLED () 	. , .

 Protected Menus (— PIN

Diagnostics ()

DECK ()	/.
PTO	PTO .
ENGINE ()	/.

About ()

	.
SN ()	.
S/W REV ()	.

:

 n/min	
	
	
	
	
	
N	
	PTO

(cont'd.)

	PTO
	
	
PIN	PIN
	
	

- : PIN “1234”.
- PIN , Toro .
1. .
 2. .
 3. PIN, , .
 4. , PIN.
- PIN , PIN .

- / .
- , ; ;
- , .
- . ; .
- , , .
- . .
- . .
- . . .
- . . .
- . .
- , , .
- .
- , . . .
- . . .
- , , () .
- . , , .
- .
- , :

- .
- .
- .
- .
- .

- . .
- .
- , Toro .

(ROPS)

- ROPS .
- ROPS .
- .
- .
- , . .
- .
- ROPS .
- ROPS . .

ROPS

- Toro .
- .

ROPS

- .
- . .
- .
- , .

- , . . .
- , . .
- . .
- ,
- , .
- : , , , . . .
- , . .
- , , , . , . .
- . , .
- , . .
- . . .

-
- 1. **31900 31901:** , [59](#) (81).
- 2. .

3. PTO .
4. .
5. 10 .
6. , 15 .
- ∴, , / . .
7. .

PTO

: PTO , .

PTO :

1. PTO .
2. , . (59).
3. PTO .

Turnaround ()

turnaround () (02835).


Turnaround () .

OPERATING (), . , .

1. .
2. PTO .
3. .

- , . , , .
- , . .
- , () .
- .
- () .
- , ∴ .
-

(A 37) (B 37) . , .

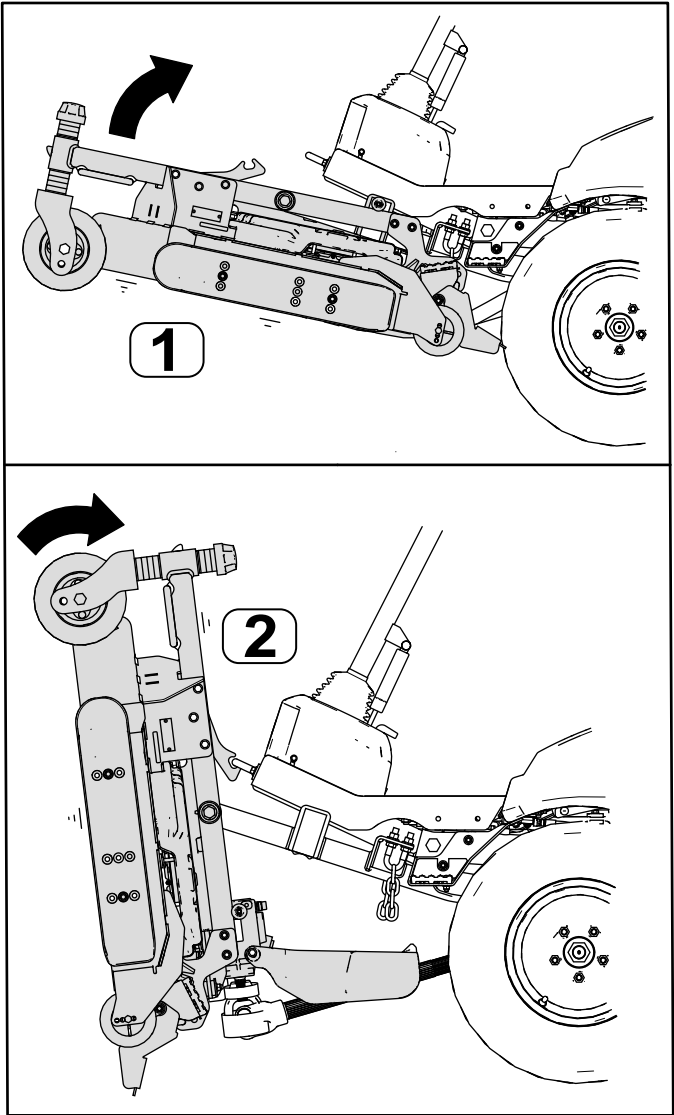


37


g258473

1.

2.



1. .
2. .
3. , .
4. (38).

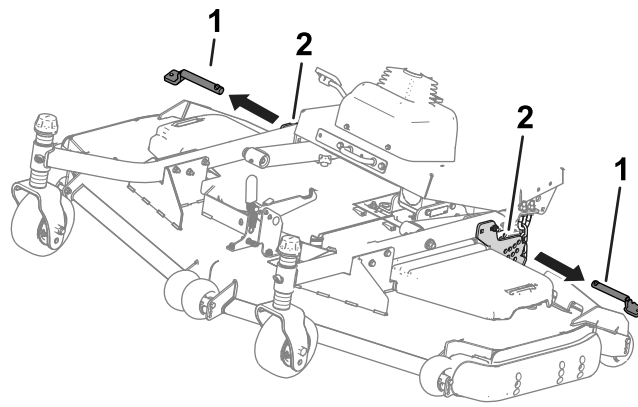

g258474

38


1.

2.

5. (39) (40).




-
-

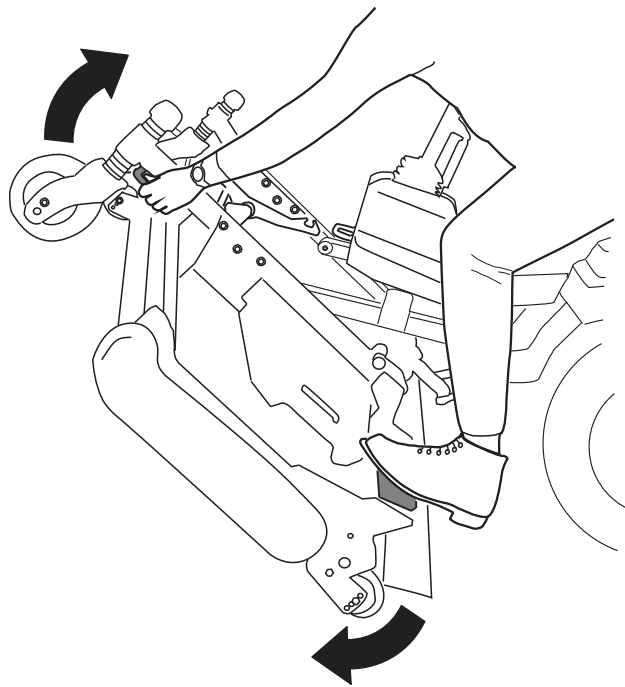

39


g298275

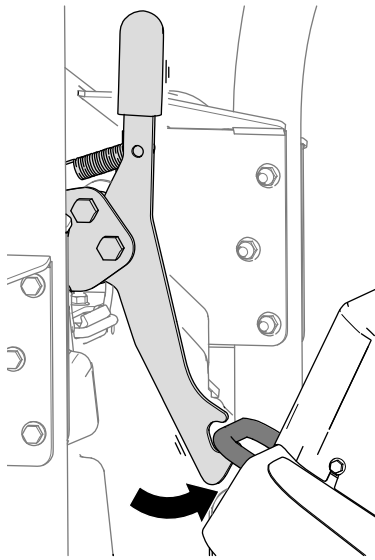

40

g298276


1. (41) (39) .

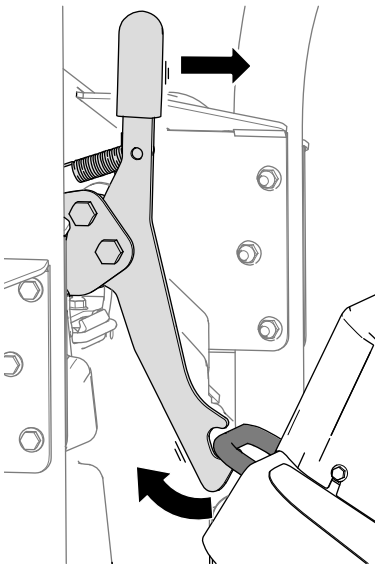

41

g298277

2. (A 42).

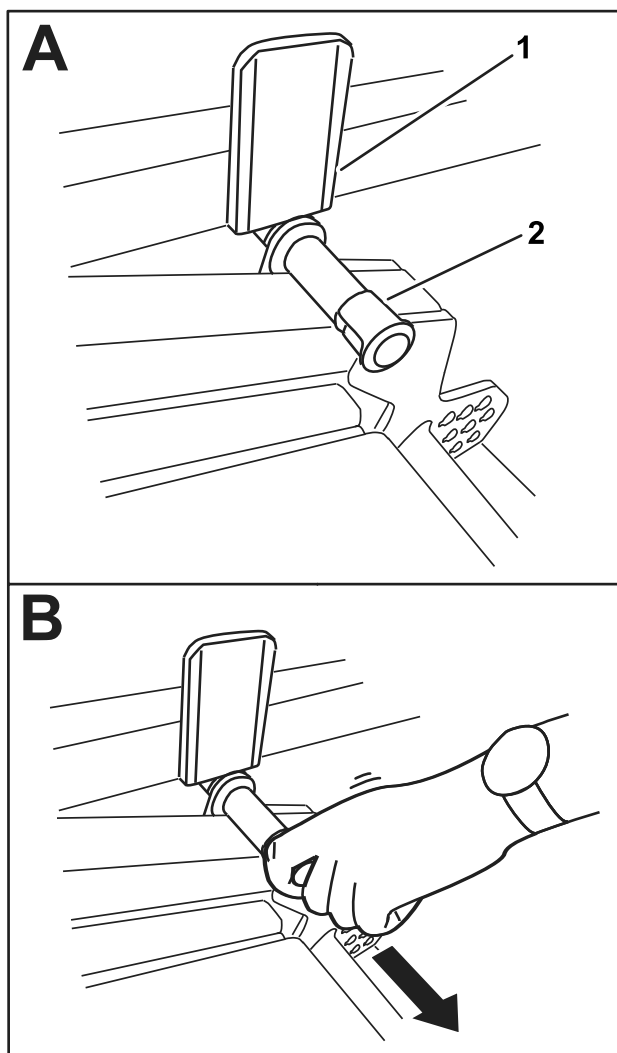

g298288

42

1.

2.

3. , (B 42) .


4. .

, . 4.8 / (3 l) .

∴ , .

, .

1. .

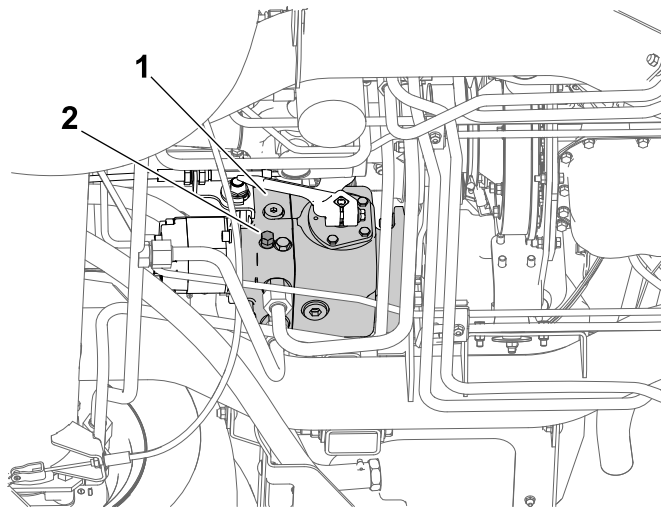

g297087

43

1.

2.

2. 18 (11/16) , 3 .

∴ .

3. , 20 N·m (15 ft-lb).

- .
- .
- .
- .

- .
- www.Toro.com .

- , :
- .
- .
- .
- .
- .
- , . . .
- .
- , () .
- , . .
- .
- .
- .
- , .
- .
- , , Toro . .

	• .
10	• . • .
50	• .
1000	• .
	• . • . • PTO () . • . • , . • . • , , () . • .
50	• . • /. • . • , , . • () . • . • .
100	• . • .
200	• . • . • PTO.

250	• () [31900 31901]. • . • ().
400	• /. • . • . • , . • , , .
500	• .
800	• (). • ().
1,000	• ().
1,500	•
2,000	• ().
	• ().
	•
2	• .

∴ .

.


	∴						
	.	.	.	.	.	.	.
.							
ROPS .							
.							
.							
.							
.							
/.							
. ³							
.							
.1.							
.							
.							
.							
.							
.							
.							
. ²							
.							
.							
1 , , 2 , 3							

:		



-
-

:

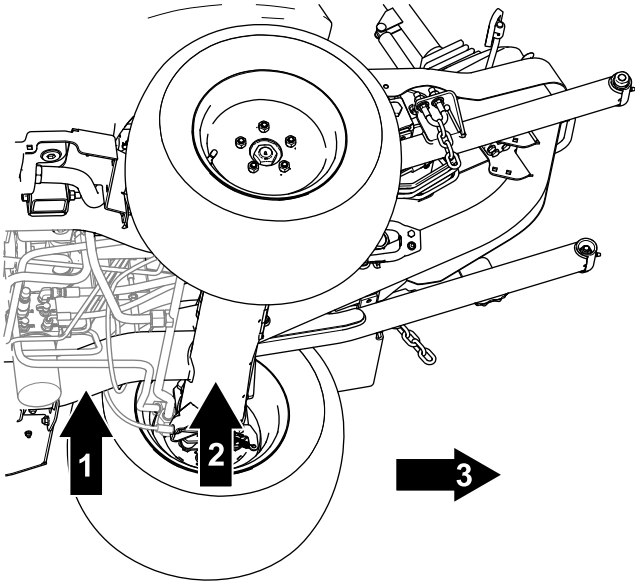

44


g299729

1. —

2. —
3.

1. 2.
2. .
3. ,.

:

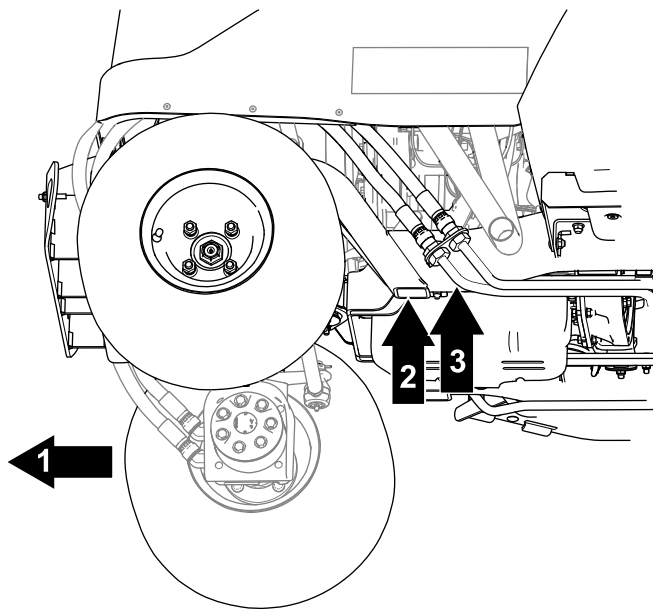

45


g299730

- 1.
2. —

3. —

-
1. 2.
 2. .
 - : 4 . .
 3. , .

1. (46).

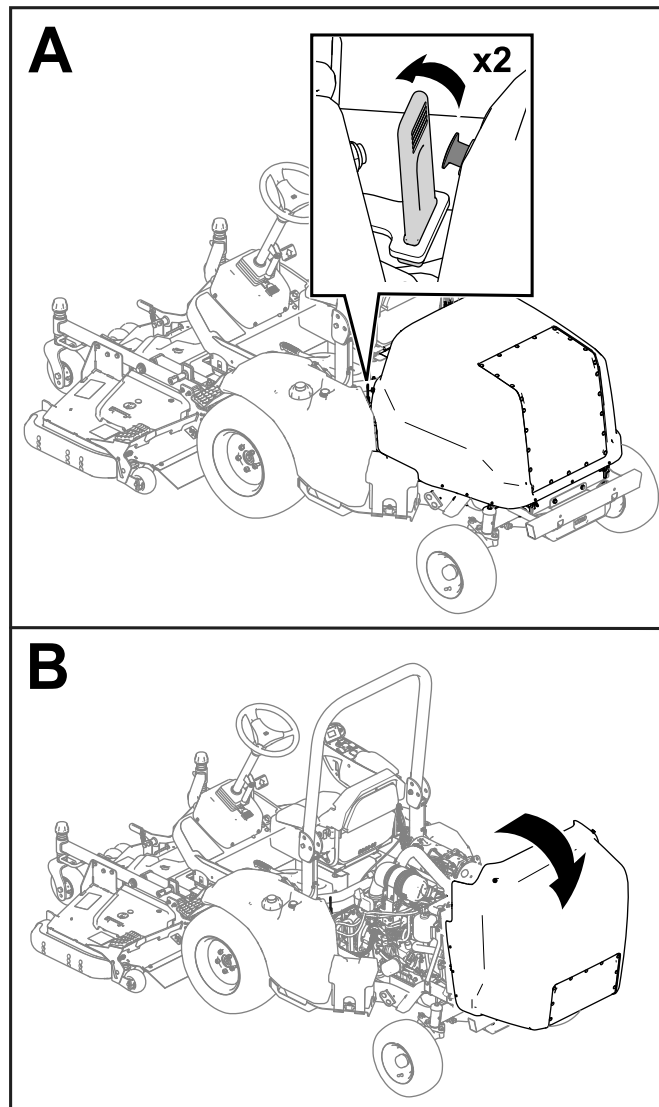

46

g285428

2. (46).


∴ .

: — PTO ().
50 — .

2.

: .

- (47)

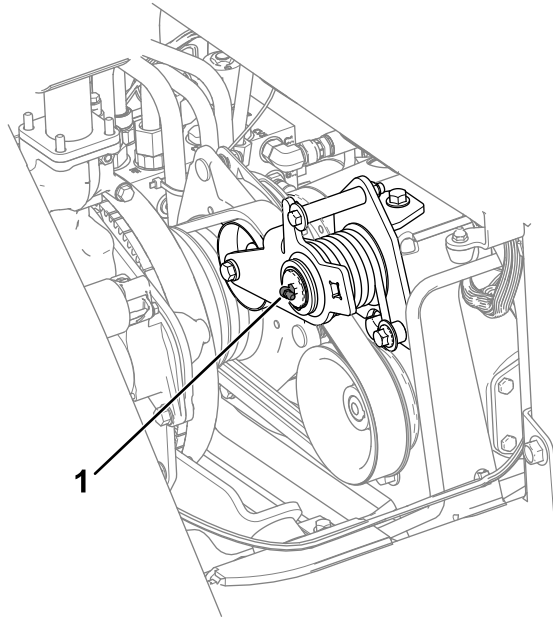


47

g300631

1.

- PTO (48)

: .

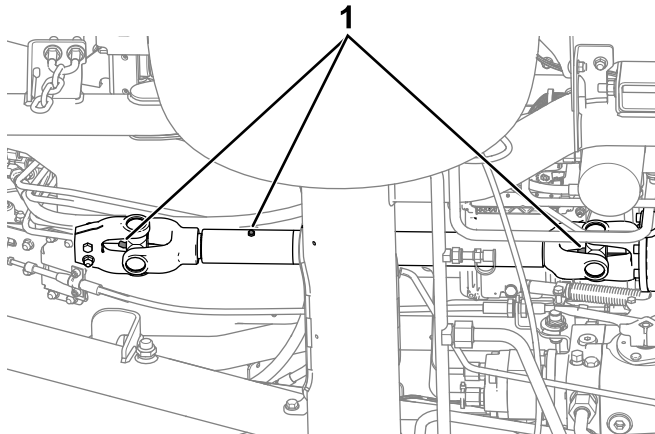


48

g303694

1.

- (49)

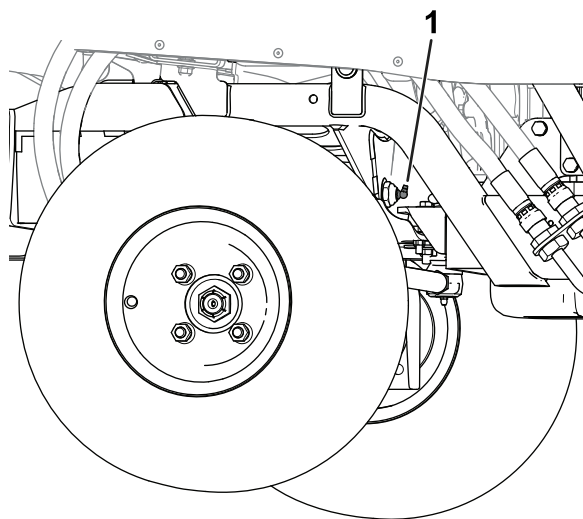


49

g308668

1.

- (50):
 - (2)
 - (2)
 - (2)

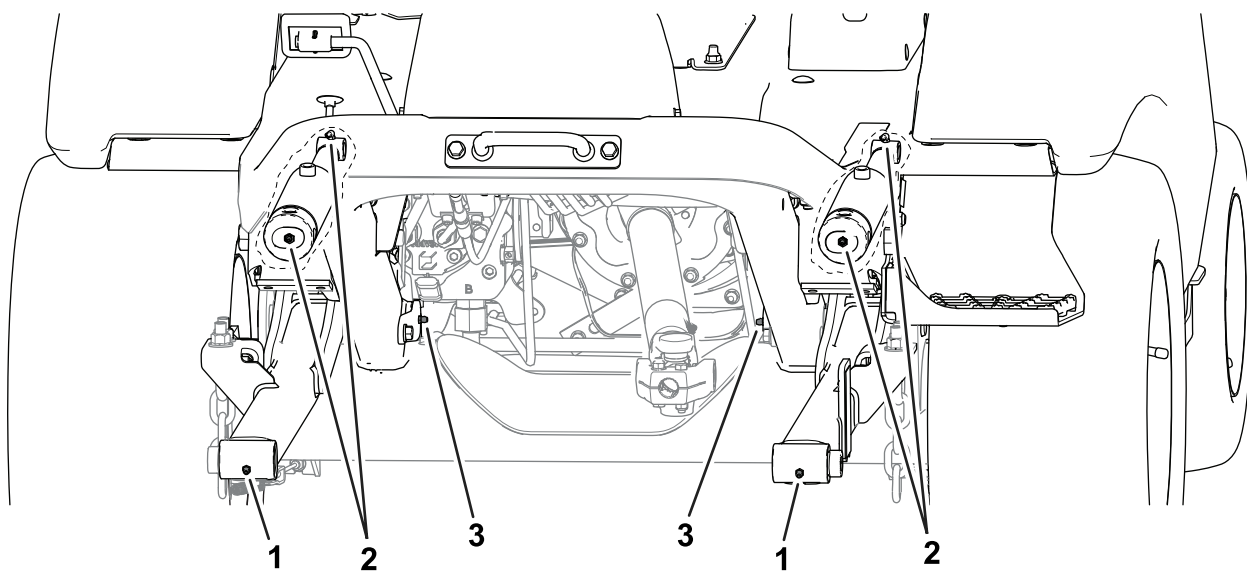

50


g285509

1.

2.

3.

- (51):
 - (2)
 - (2)

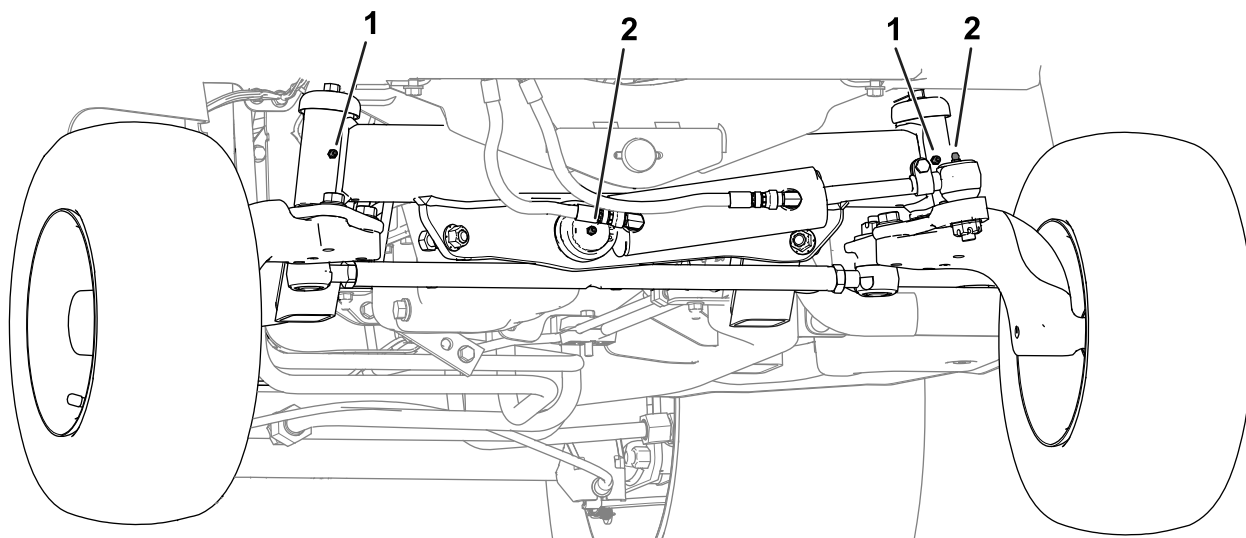

g353292

51

()

1.

2.

-
-

: , :

- API CJ-4
- ACEA E6
- JASO DH-2

: 6.2 (6.5) .

: :

- : SAE 15W-40 (0°F)
- : SAE 10W-30 5W-30 ()

Toro 15W-40 10W-30.

:


. , 10 .

, . .


: . , . , .

: . , .

1. ; (70).
2. , 52.

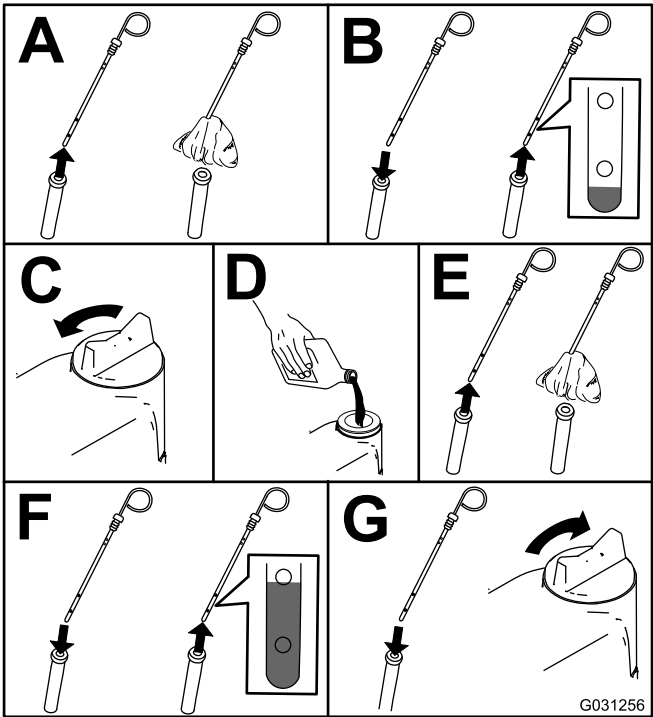

- : 500 — .
- 250 — () [31900 31901].
1. 5 .
 2. , , , .
 3. 53.

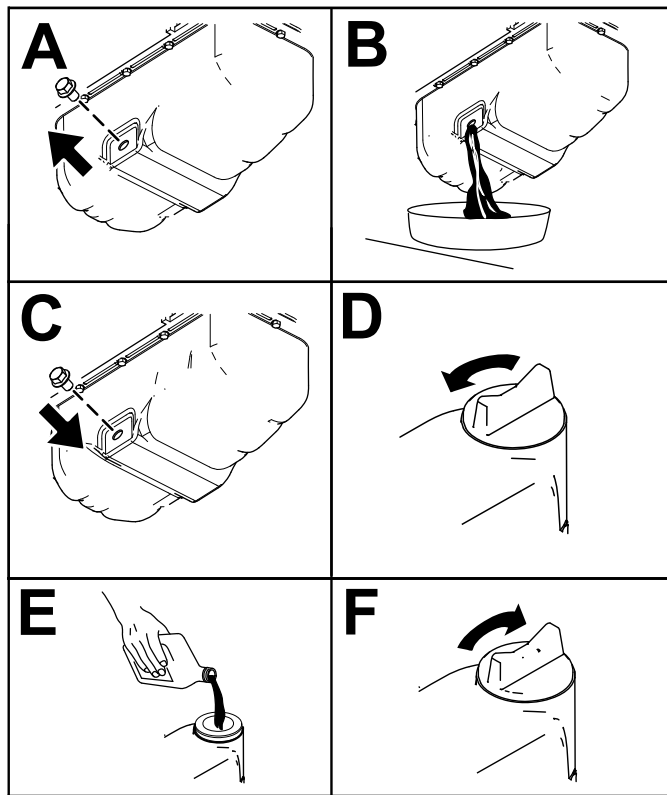


53

g297639


4. 54.

: $\frac{3}{4}$.

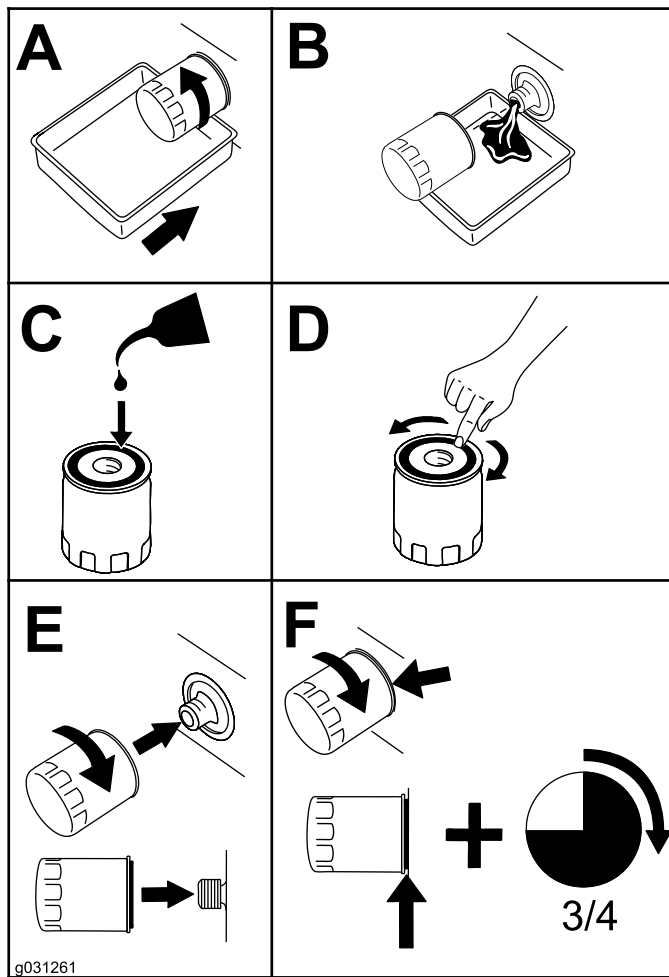

: — , .
250 —.


. , , ,
(55) . .

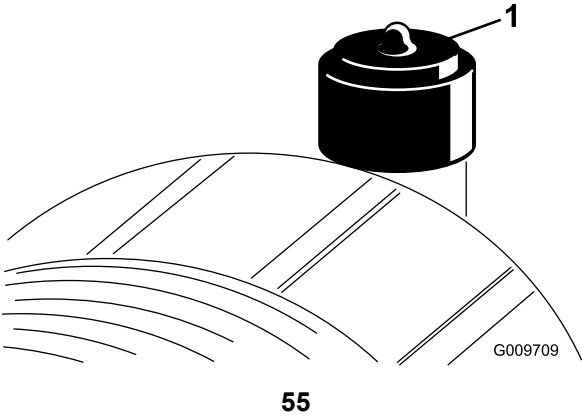

g009709

1. .

: .
1. (56).

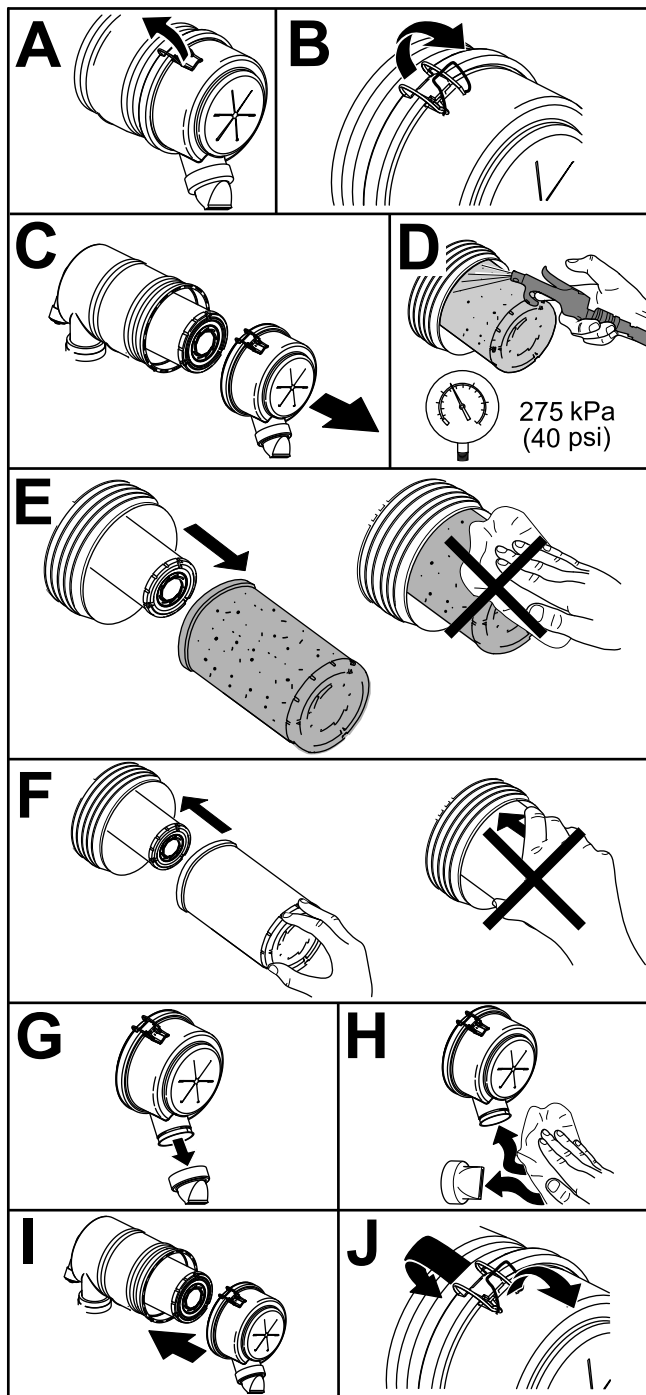

56

g253706

2. (55) .




, . .

.

/

: 50


/ 57.

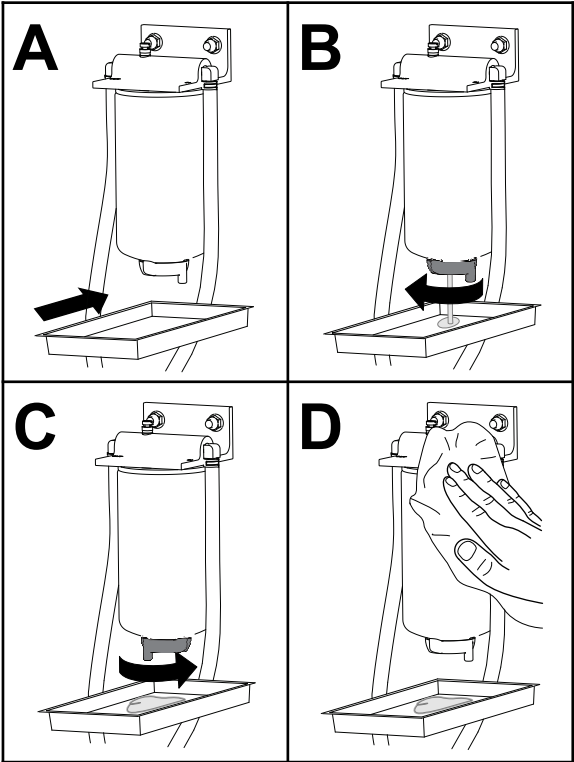

/

: 400

/ 57.

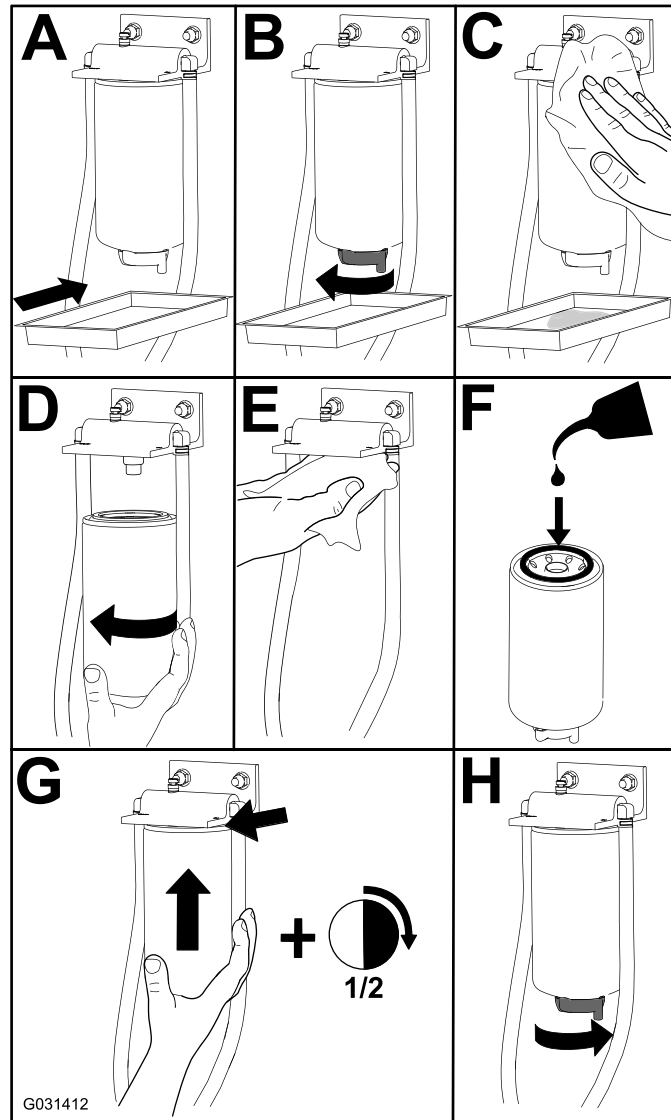


g031412

: 400

31900 31901

- 1. (59).
- 2. (59).

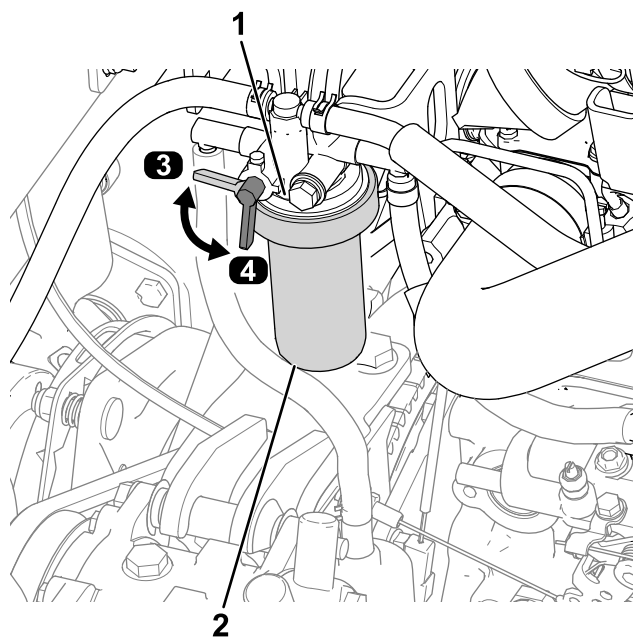

59


g312905

- | | |
|----|--------|
| 1. | 3. () |
| 2. | 4. () |

-
- 3. (59).
 - 4. , .
 - 5. , 1/2 .
 - 6. (59).
 - 7. .

31907 31909

- 1. (60).

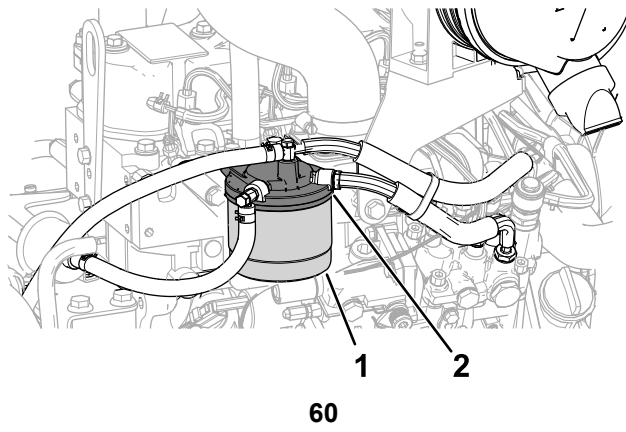

g326083

1.

2.

2. (60).

3. , .

4. , $\frac{1}{2}$.

5. .

∴ —

, . .


∴ 400 / ()

, .

-
- , ,

. , , (61).

∴

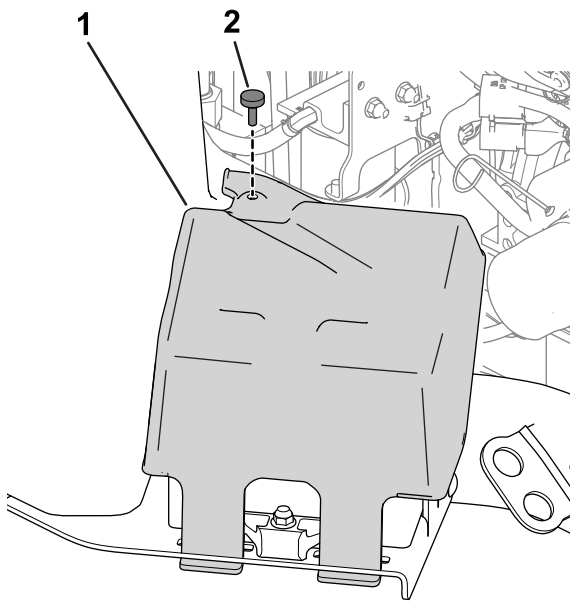

61

g289491

1.

2.




- , . , .
- , .
 - .



, . , .

() ().

1. (62).

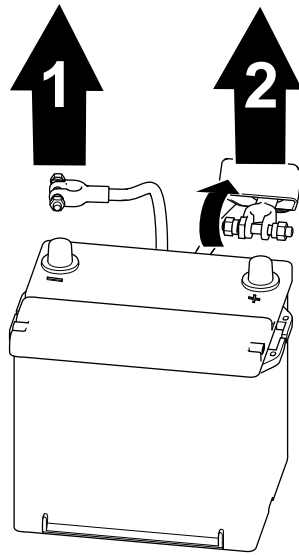

62

g289503

- 1.
- 2.


2. (62).



, . , .

() ().

1. (63).

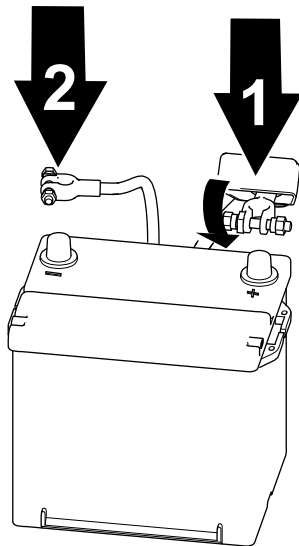

63

g289502


- 1.
- 2.

2. (63).

∴ .

(64) . . .

⋮ ; (84) . .

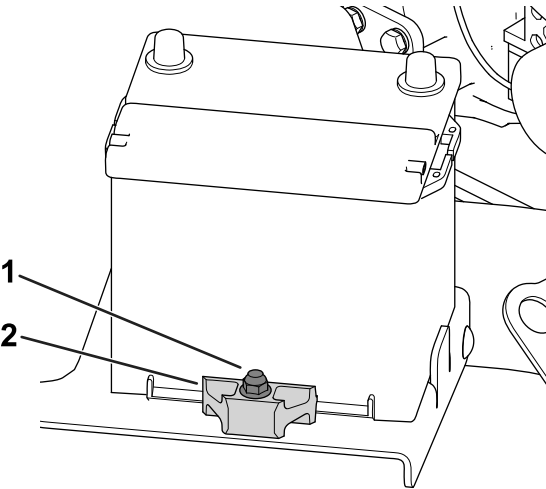

64

g285614

1.

2.

∴ , .

50 . , .

1. ; (84).

2. . , :

A. .


B. () Grafo 112X (Toro 505-47) .

C. .

D. .

(65).

∴

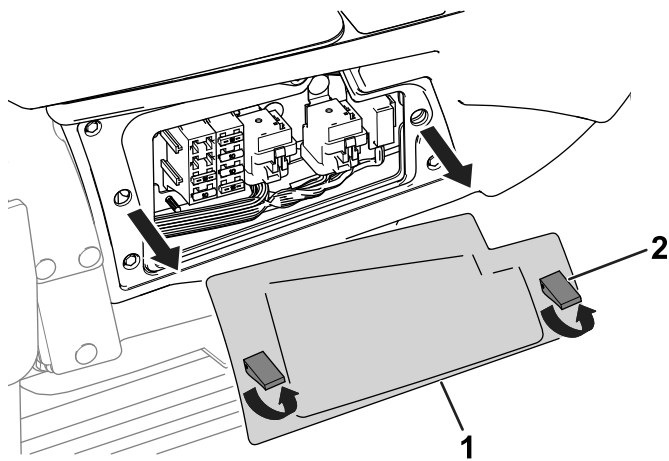


g289514

1.

2.


(88) (66):

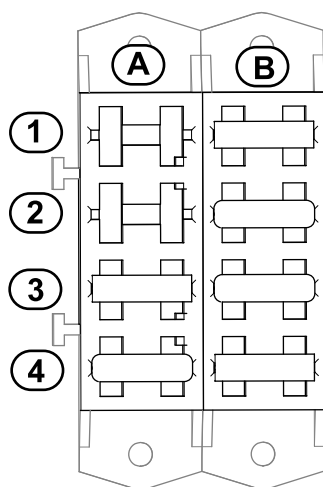

g289587

	A	B
1	(10 A)	(15 A)
2		(10 A)
3	(15 A)	(15 A)
4	USB, , telematics, (20 A)	(20 A)


. (67).

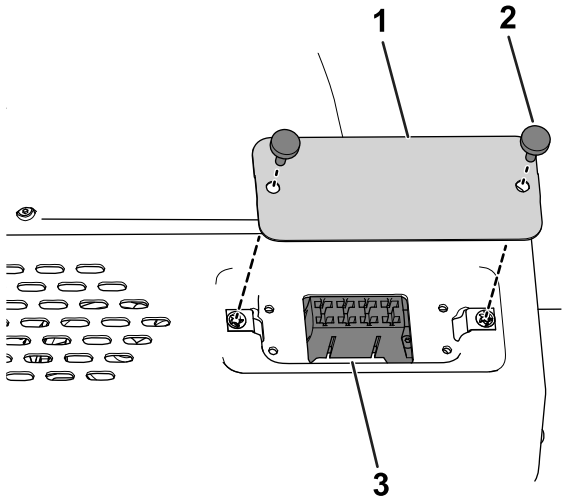

g285656

1.
2.
3.

(88) (68):

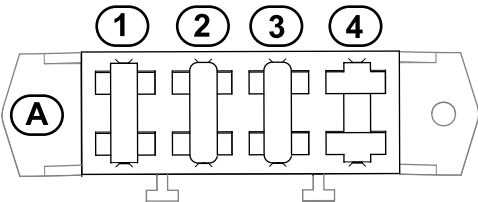

g300604

	A
1	, (25 A)
2	(20 A)
3	(40 A)
4	

:


10

200

: 102 108 N·m (75 80 ft-lb)

(4) 69 70 .


• : 69

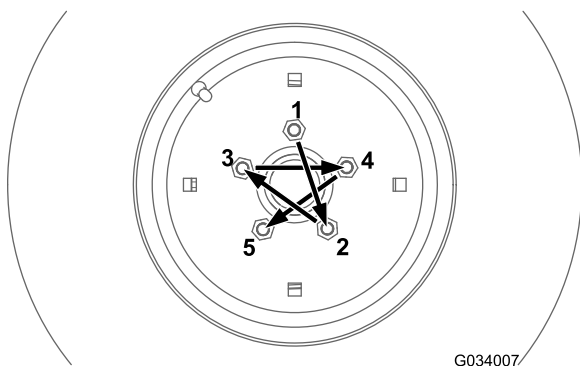

69

g034007

• (4): 70




70

g274650

PTO

PTO , (71) . 71.

1. , .

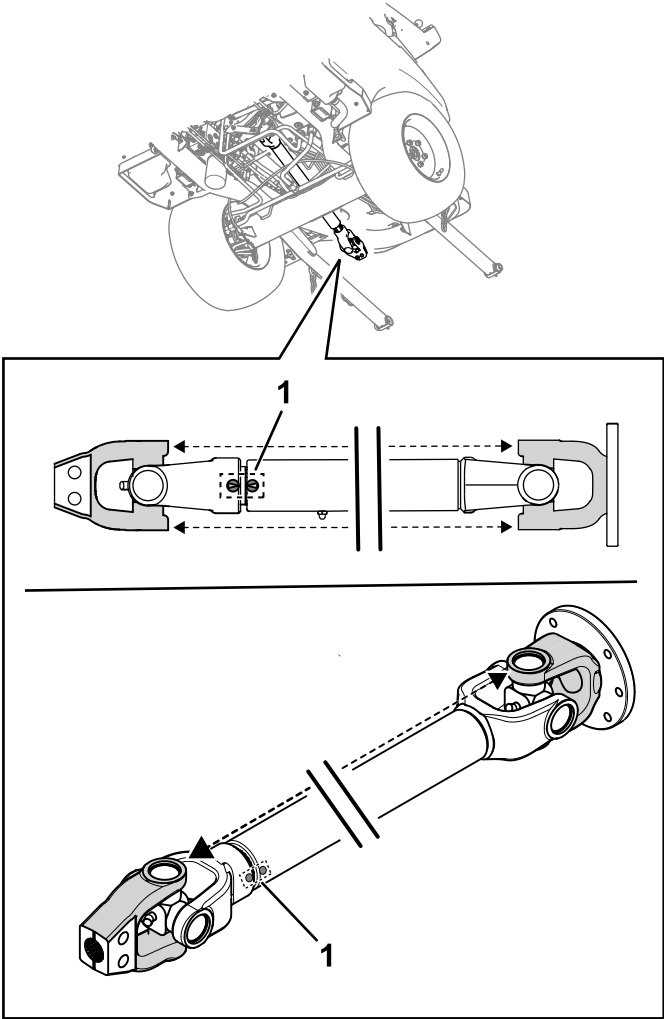

71

g353347

1.

- ; .
- .
- 15 .
- .
- .
- , .

(ethylene glycol) 50/50.

: .
(IAT) () . .


Ethylene-Glycol	
	(OAT)
: (IAT) () . : , , , , , , .	

ATSM	SAE
D3306 D4985	J1034, J814 1941

: **50/50**.

- : , .
- : , .
- : , .

: — .
—, , ().
1,500 —
, (72). , ().
, .
1. , .

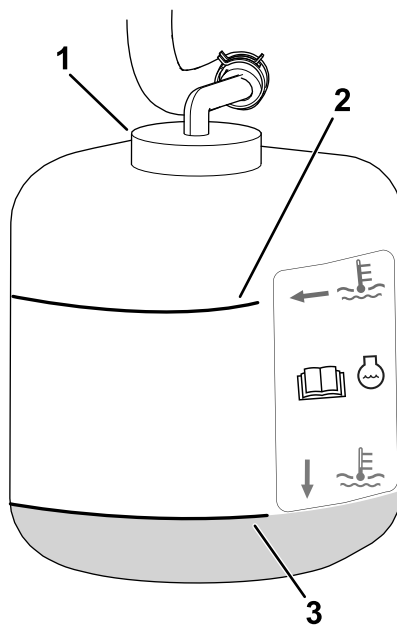

72

g325684

- 1.
2. ()

3.


2. , [(91)] .

∴ .

.

3. .

: 50

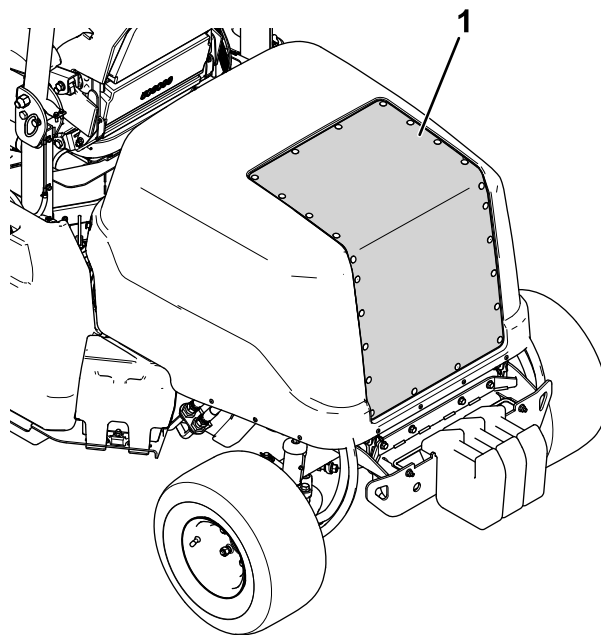

73

g309128


1.

- 1. ; (70).
- 2. (73). .

: 50

250

- . (74).
- : .

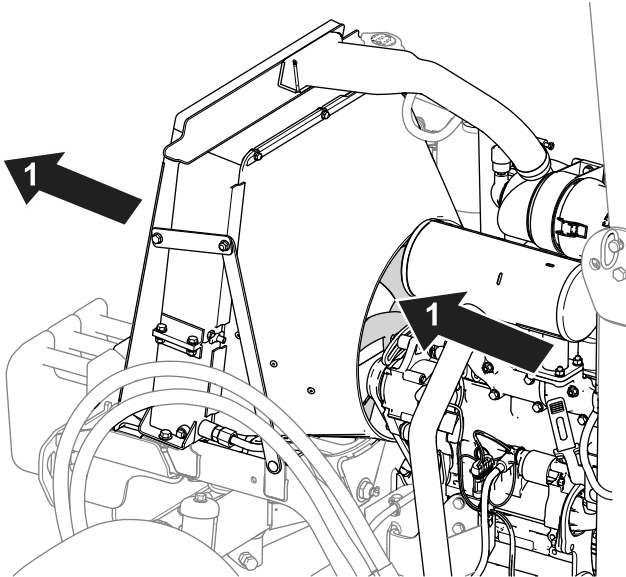

74

g299819

1.


- .

: 200

, , , , , . .

: 400


- 1. , (68).
- 2. .
- 3. ; (44).
- 4. (75) .
 - , .
 - , ; (94).

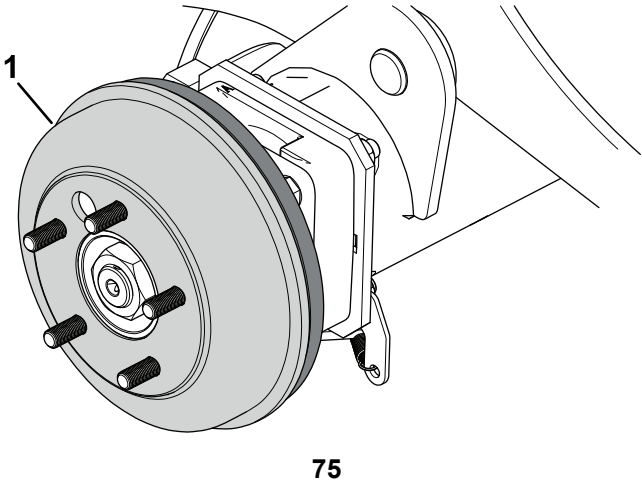

g312869

- 1.
-
- 5. , (89).

- 1. .
- 2. .
- 3. (76) .

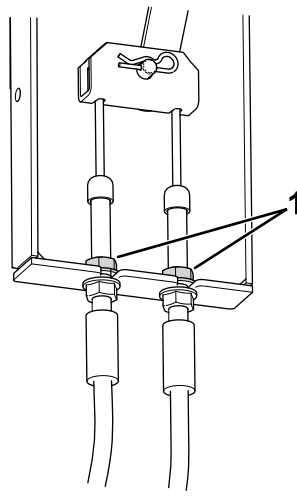

76

g299613

1.

4. (3.2 [1/8] 4.8 [3/16]).


5. .

6. .

7. 5 6 .

8. ; (94).

: 10
50
100
10 (3/8) 4.5 (10) .
10 (3/8), :
1. (68).

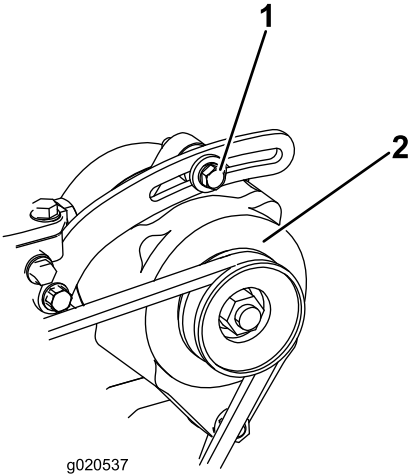

g020537


g020537

77

1.
2.

2. .
3. .

: 100
.
, , (97).

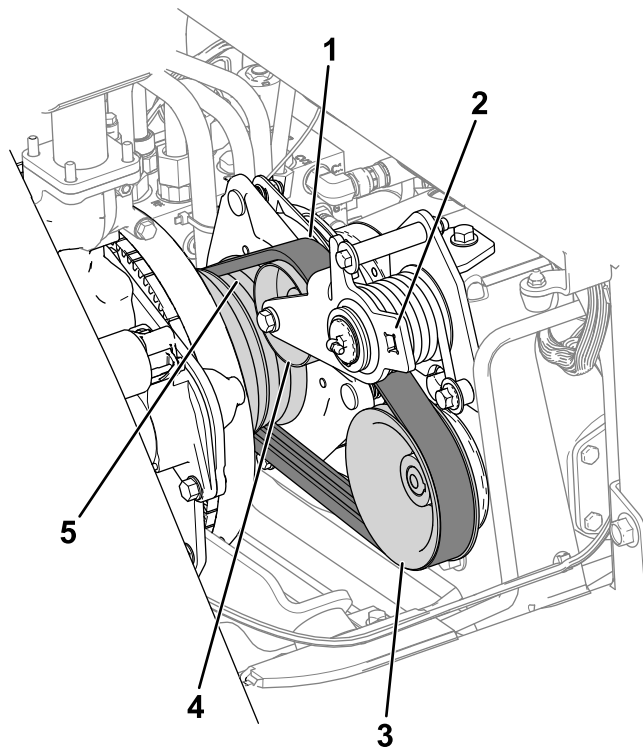


78

g300570

- | | |
|----|----|
| 1. | 4. |
| 2. | 5. |
| 3. | |

1. PTO , .
2. ([79](#)).

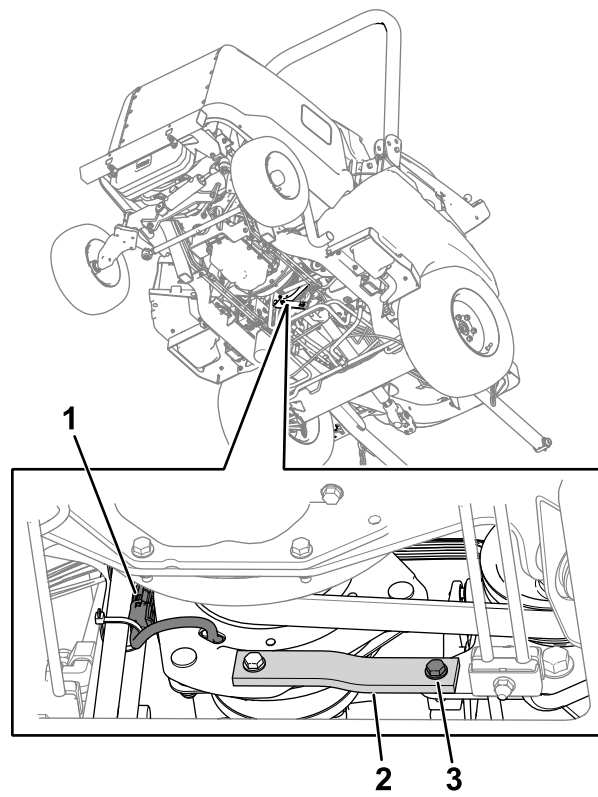

g300592

79

- 1.
- 2.
3. ,

3. , (79) .

, ,

4. , , .

5. PTO.

1. PTO, .

2. .

3. , (78).

4. .

5. .

6. , .


7. .

PTO

: 200

- 1. .
- 2. .
- 3. 0.3 (0.012) (80).

: (80). 0.6 (0.024). 3 0.4 (0.012).

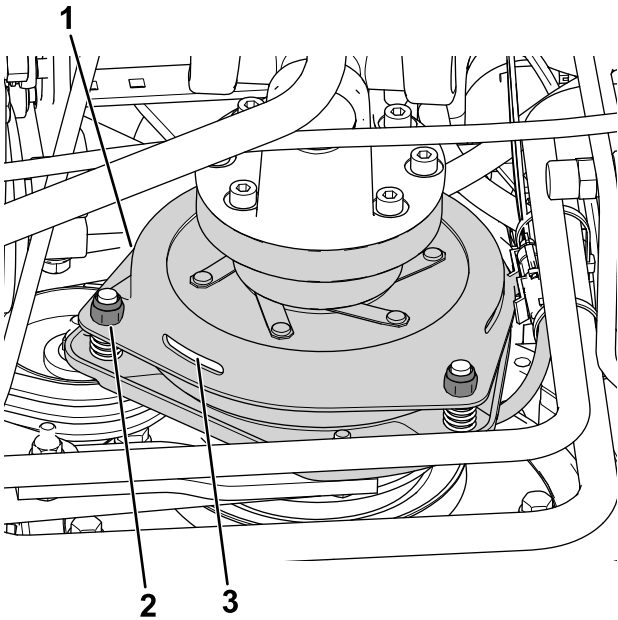


80

g299611

- 1.
- 2. (3)
- 3. 0.3 (0.012) (3)

- 4. 3 , 3 .
- : 1 .

- 1. (81).
- ∴.

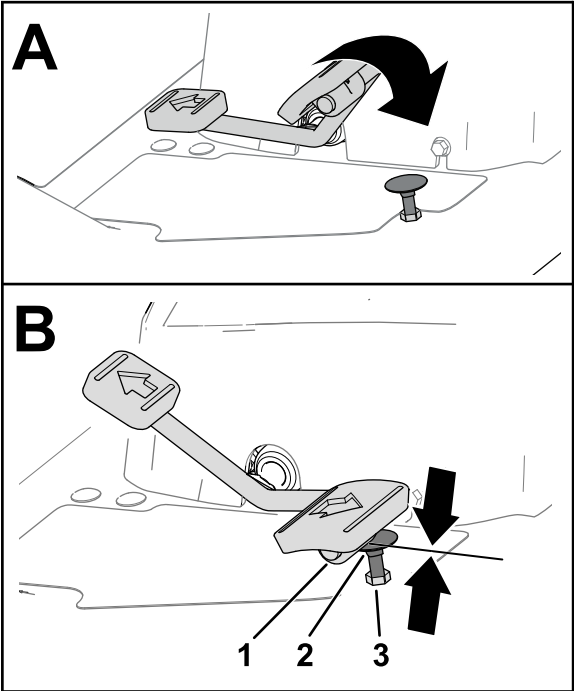


81

g320590

- 1.
- 2.
3. ()

2. , :

- A. (81).
- B. (82).

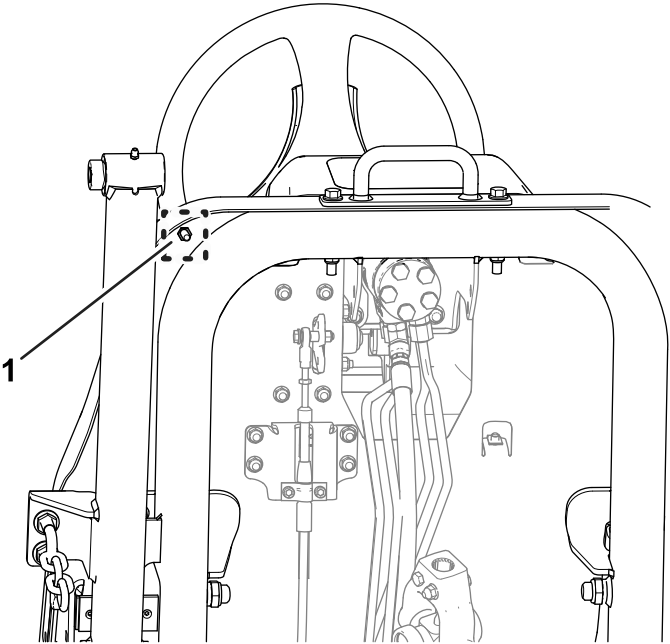

82

g320591

1. ()

- C. (81).
- D. , (81) .

E. 1 .

∴

F. , (81 82) 37 45 N·m (27 to 33 ft-lb).

G. .

∴, A G.

- , . .
- .
- .
- .
- .

22.7 (6) . ; (102).

: Toro PX Extended Life; 19 (5) 208 (55) .

: .

: Toro PX Extended Life Hydraulic Fluid, . . .

:Toro , .

/, ISO VG 46

:

, ASTM D445

cSt @ 40°C (104°F) 44 48

ASTM D2270

140

, ASTM D97

-37°C -45° C (-34° F -49° F)

:

Eaton Vickers 694 (I-286-S, M-2950-S/35VQ25 M-2952-S)



;, . 20 (2/3) . 15 22 (4 6) . 44-2500 Toro .

: (Toro Premium Synthetic Biodegradable Hydraulic Fluid) Toro. elastomers Toro . , , . 19 (5) 208 (55) Toro .

:

1. , , , .


2. (83).

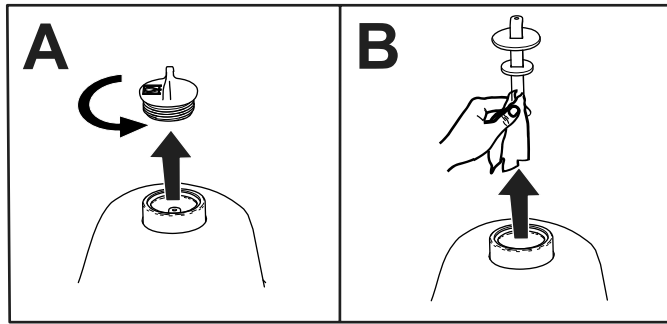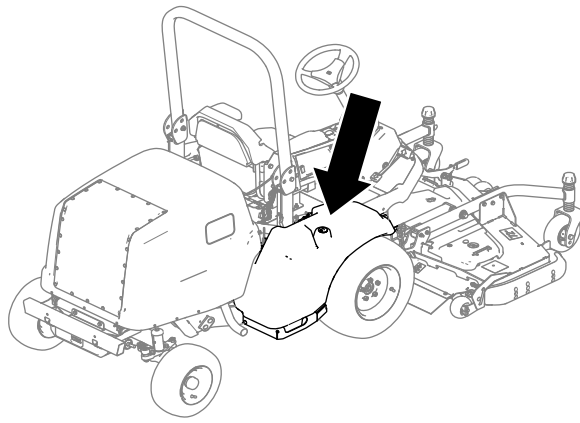

83

g285821

3. (83).
4. .
5. (84).
 - : 2 (A 84). .
 - : 2 (B 84).

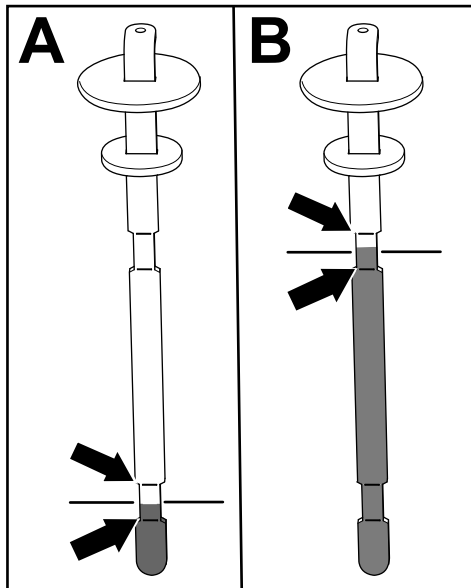

84

g286314

6. (; 5) , . 3 5 2 .
7. .
8. .

∴ .

9. .

: 1000 — .

800 — ().

800 — ().

1,000 — ().

2,000 — ().

, Toro , . .


: **Toro**, . .

1. , , , .

2. .

3. .

4. (85) .

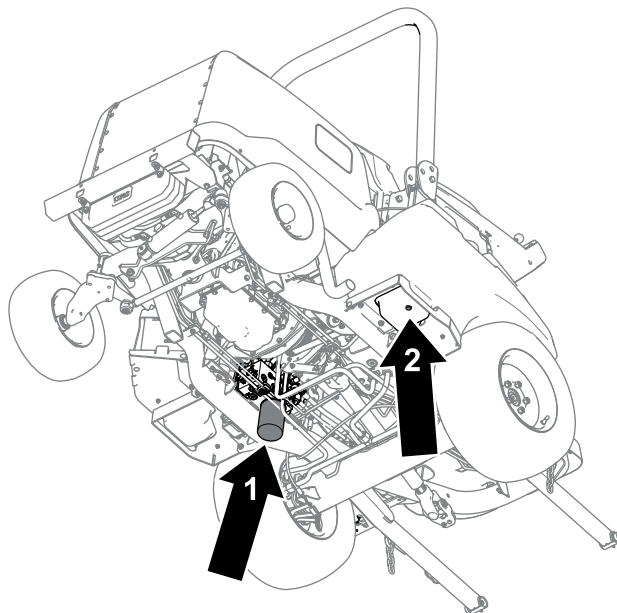

85

g286315

1.

2.

5. .

6. (85), .

7. .

8. ; ½ .

9. , (102).

∴ . .

10. .

11. .

12. :

A. .


B. .

- C. (:).
13. .
14. ; (102).

: 2

, , , , , . .

: (86). , 0.6 (2) .

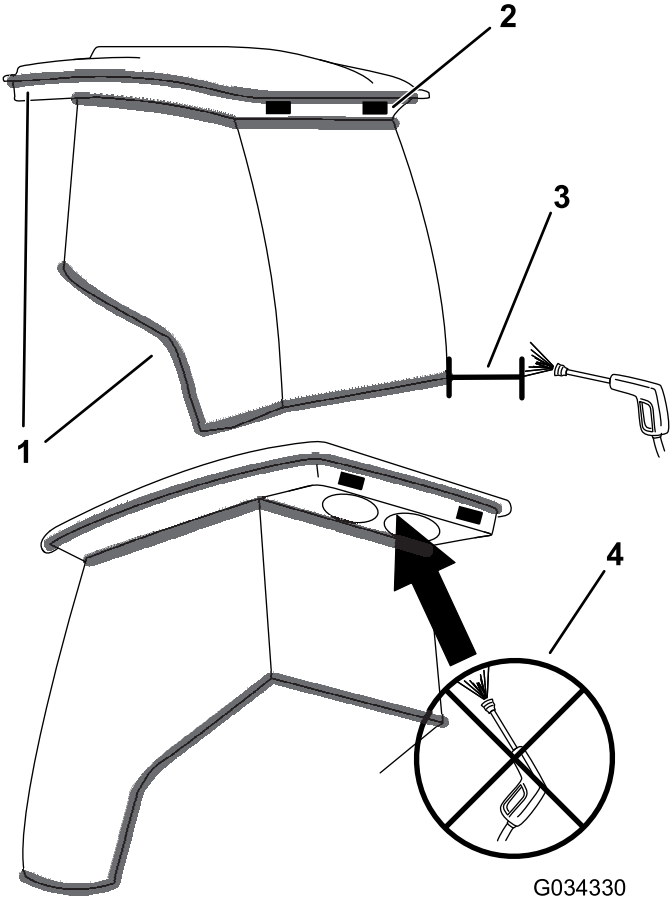

G034330

g034330


86

- 1.
- 2. 0.6 (2) .

3. .

: 30 .

- 1. (87).
- 2. 23.1 N•m (17ft-lb).
- 3. .

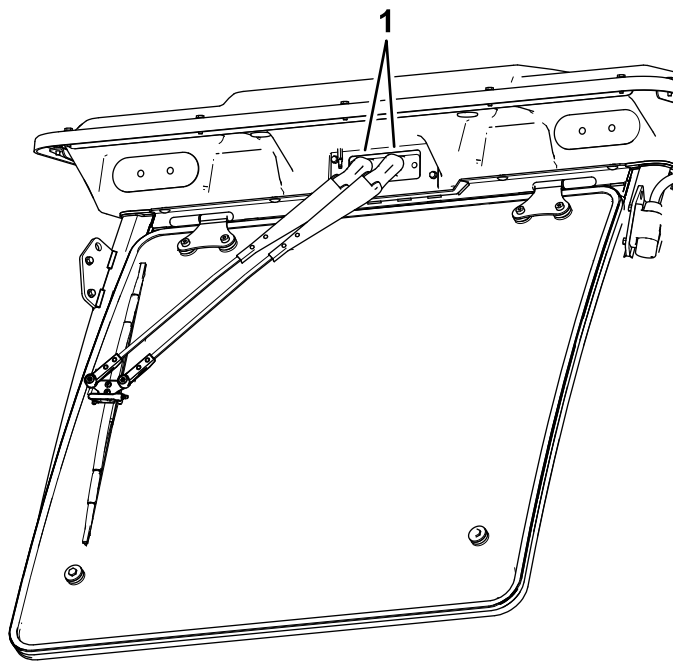


g593283

87

1.

: 400

1. (88).

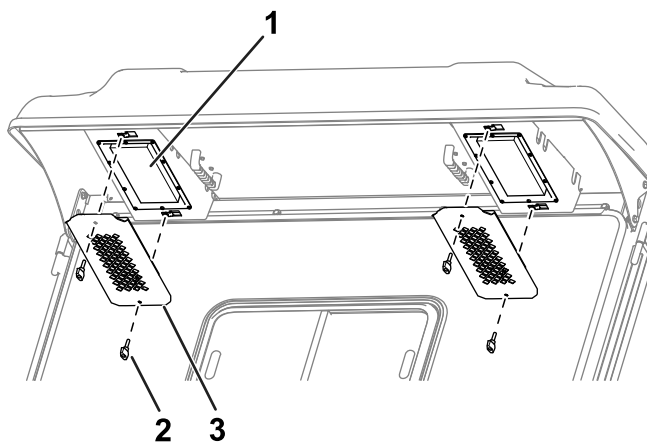

g251432

88

1.

2.

3.


2. .

3. .

∴ , , .

4. (88).

- : .
- 1. .
- 2. .
- :.
- : , , .
- 3. .
- 4. (89).

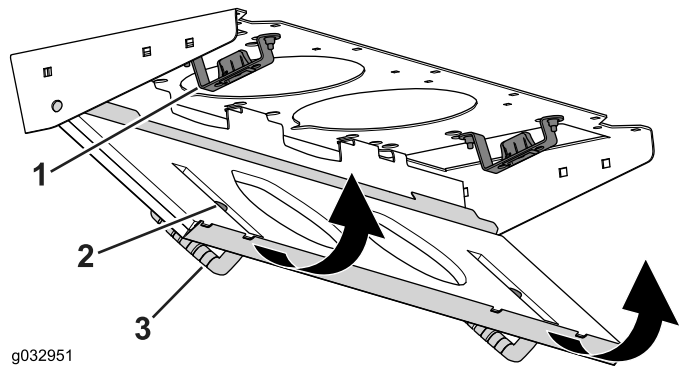


89

g032951

- 1.
- 2.
- 3.

- :.
- 1. . (90).

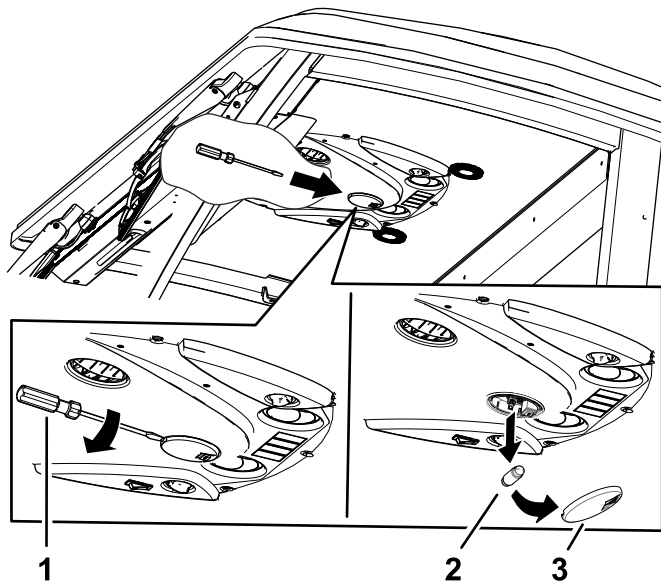


90

- 1.
- 2.
- 3.

- 2. (90).

- 3. .
- 4. .

- ∴.
- 1. (91) .

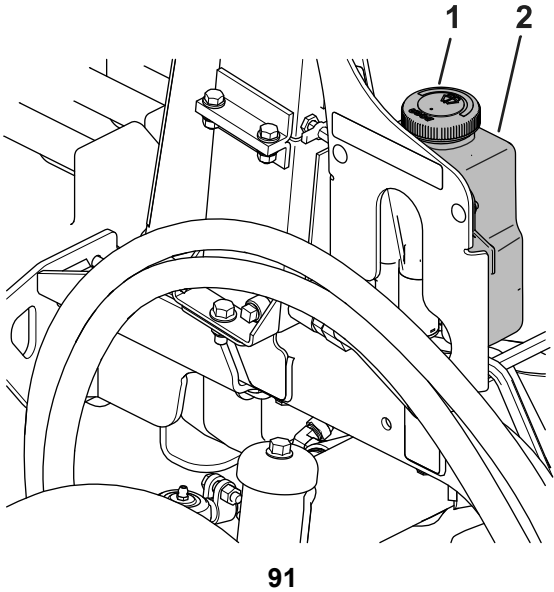

g353836

- 1.
- 2.

-
- 2. .
 - 3. .

- , . , .
- , : .

∴ .

1. , , .

2. , .

∴ .

3. , (51).

4. , .

5. , (102).

6. , , .

7. .

8. . .

9. . .

■
■

■
■

Toro

Toro ("Toro") . . . , Toro . Toro : , : , . Toro , , . . .

Toro . . , legal@toro.com.

Toro

. . .

. . , legal@toro.com. Toro , . .



Toro
1,500

Toro Toro ("") 2 1,500 *, . . , (Aerators) ().
* .

. Toro. Toro . Toro .

. . . , :

: () : .

Toro Commercial Products Service Department
8111 Lyndale Avenue South
Bloomington, MN 55420-1196
952-888-8801 800-952-2740
: commercial.warranty@toro.com

(ProStripe 02657)

Prostripe Toro Friction Disc Crank-Safe Blade Brake Clutch (Blade Brake
Clutch (BBC) + Friction Disc) . . , Blade Brake Clutch (BBC) .

, , , , Toro .

Toro .

Toro , Toro , . . , . .

, . .

(EPA) / (CARB). . .

, . .

. :

- Toro Toro.
- / .
- , .
- . . , , , , () , , , , : , .
- , , , , , , , .
- (: ,) .
- , , . " " , , .

Toro Toro () , . . , Toro .

?

:



: –www.p65Warnings.ca.gov.

65 ?

65 , . . , / . . 65 .

65 , , . , 65 . , 65 “ ” ‘ ’ . , <https://oag.ca.gov/prop65/faqs-view-all>.

65 (1) “” (2) .

?

65 . , , , , . , 65 .

?

65 . 65 . : 65 0.5 , .

?

- 65 .
- 65 65 , .
- 65 .
- 65; .

Toro ?

Toro . Toro , . Toro “” , Toro 65. , Toro , 65 .



Count on it.