



Two-Post Roll-Over Protection System Kit

Reelmaster® 5010 Series Traction Units

Part No. 110-8860


Form No. 3354-846 Rev. A

Installation Instructions

Safety and Instruction Decals



Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or lost.

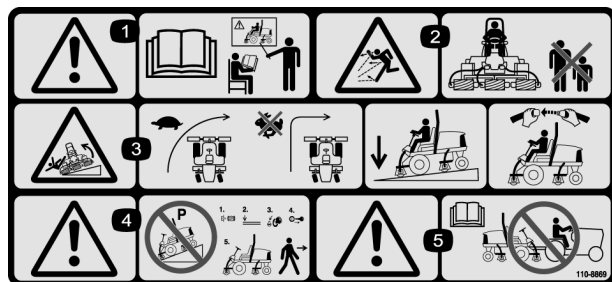

110-8869

1. Warning—read the *Operator's Manual* and receive training before operating the machine.
2. Thrown object hazard—keep bystanders a safe distance from the machine.
3. Tipping hazard—slow machine before turning, do not turn at high speeds; lower the cutting unit when driving down slopes; always wear the seat belt with the ROPS installed.
4. Warning—do not park the machine on slopes; engage the parking brake, lower the cutting units, stop the engine and remove the ignition key before leaving the machine.
5. Warning—read the *Operator's Manual*, do not tow the machine.

Loose Parts

Note: Use the chart below to identify parts used for assembly.

Description	Qty.	Use
Seat belt	1	Mount to seat
Screw, 7/16 x 1 inch	2	
Lockwasher, 7/16	2	
ROPS Assembly	1	Mount to frame
Screw, 1/2 x 1-1/4 inch	8	
Decal	1	Affix to operator platform
Parts Catalog	1	
Installation Instructions	1	

WARNING

POTENTIAL HAZARD

- Traction Unit rolls over.

WHAT CAN HAPPEN

- Bodily injury or death could occur.

HOW TO AVOID THE HAZARD

- Make sure to use the seat belt when the ROPS is installed on the Reelmaster 5010 Traction Units.

Mount the Seat Belt

1. Mount the seat belt to the holes in the side of the seat with 2 bolts (7/16 x 1 inch) and lockwashers (7/16 inch). Tighten the bolts securely. The latch side of the seat belt is to be mounted to the left side of the seat (Fig. 1).

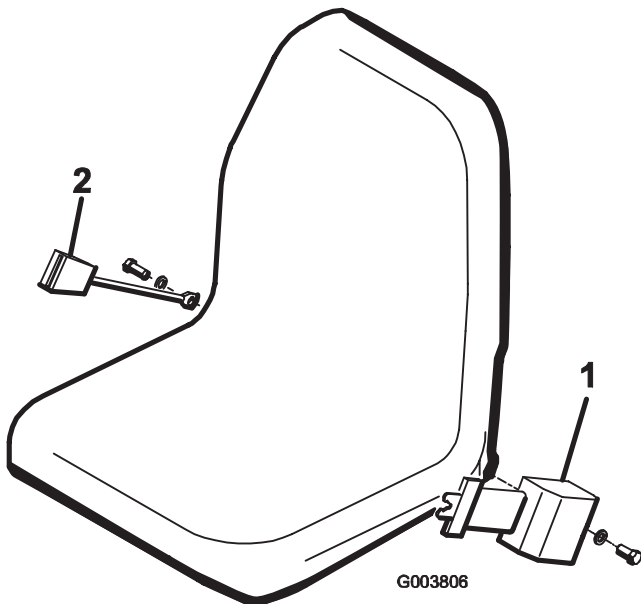


Figure 1

1. Seat belt

2. Seat belt latch

Mount the ROPS

1. Lower the roll bar aligning it with the mounting holes in the frame as shown in figure 2.
2. Secure each side of the roll bar to the frame with (4) 1/2 x 1-1/4 inch flangehead bolts (Fig. 2).

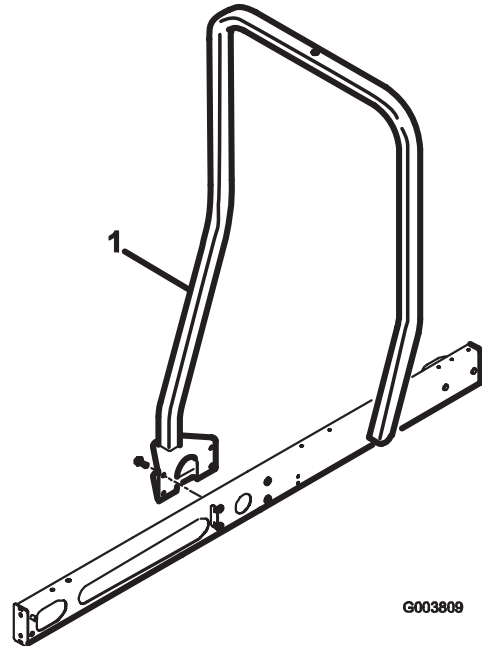


Figure 2

1. Roll bar (ROPS)

Note: When operating machine, always use the seat belt and ROPS together.

Install the Decal

1. Affix the danger decal over the existing decal on the operator platform (Fig. 3).

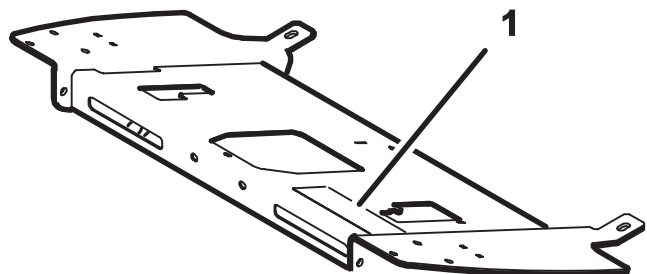


Figure 3

1. Danger decal