



Auxiliary Hydraulic Power Kit

Groundsmaster® 7200/7210 Traction Units

Model No. 30380

Form No. 3356-247 Rev A

Installation Instructions

Note: The Auxiliary Hydraulic Power Kit is used in conjunction with the Rear Quick Attach System, Model 30377.

1. Locate the manifold block mounted to the rear quick attach system adapter bracket (Fig. 1).

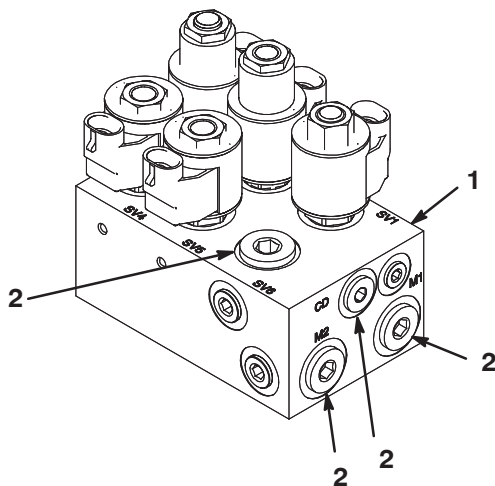


Figure 1

1. Manifold block
2. Plug

2. From the side of the manifold block, remove the (3) plugs shown in figure 1.
3. Install the straight fittings, male coupler, female coupler and quick disconnect coupler to the manifold block (Fig. 2).

Note: Make sure the O-rings are in position and lubricated before installing the fittings.

4. Install the dust cap and dust plugs to the appropriate couplers (Fig. 2).
5. Remove the plug from the top of the manifold block (Fig. 1).
6. Thread the cartridge valve into the manifold block (Fig. 2).

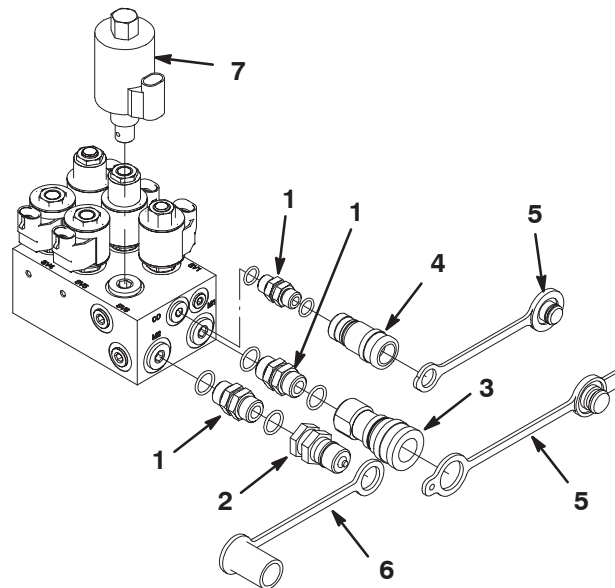


Figure 2

1. Straight fitting
2. Male coupler
3. Female coupler
4. Quick disconnect coupler
5. Dust plug
6. Dust cap
7. Cartridge valve

7. Locate the control panel knock-out plug under the rear quick attach system decal (Fig. 3). Remove the knock-out plug and cut away the decal from the opening.

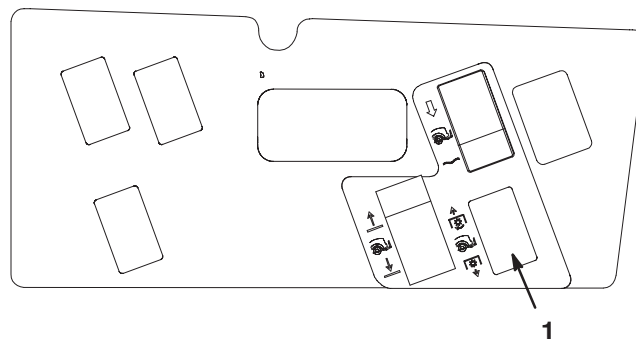


Figure 3

1. Knock-out plug location

8. Under the control panel, locate the connector from the rear quick attach system wire harness.
9. Plug the connector into the included switch and plug the switch into the control panel.