



Z500 Z Master® Mower Operation

Model No. Z500 Z Master Mowers

Addendum

Important: Keep this information with the mower Operator's Manual.

The top damper mounting bolt can be adjusted to obtain a desired motion control lever resistance. Refer to Figure 1 for the mounting options.

Torque the bolt to 200 in-lb (22.6 N·m).

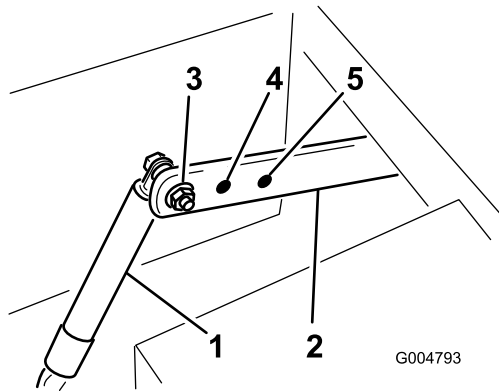


Figure 1

- | | |
|------------------------------------|-------------------------------------|
| 1. Damper | 4. Medium resistance or medium feel |
| 2. Motion control bracket | 5. Least resistance or softest feel |
| 3. Most resistance or firmest feel | |



Cortacéspedes Z Master® Z500

Nº de modelo Z500 Z Master Mowers

Addendum

Importante: Guarde esta información junto con el Manual del operador.

El perno de montaje superior del amortiguador puede ajustarse para obtener la resistencia deseada en la palanca de control de movimiento. Consulte las opciones de montaje en Figura 1.

Apriete el perno a 22,6 Nm.

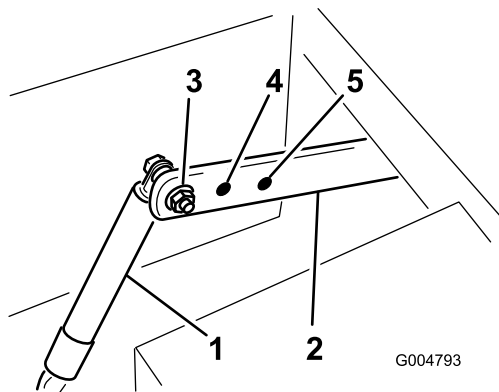


Figura 1

- | | |
|---------------------------------------|--|
| 1. Amortiguador | 4. Resistencia media, tacto medio |
| 2. Soporte de control de movimiento | 5. Menor resistencia, tacto más blando |
| 3. Mayor resistencia, tacto más firme | |