



Rear Roller Scraper Kit with Roller

Greensmaster Flex™ 18 and Flex™ 21

Rear Roller Scraper Kit

Riding Greensmaster DPA Cutting Reels

Part No. 112-9351

Part No. 112-9352

Part No. 112-9353

Installation Instructions

1. Place the cutting unit on a level surface.
2. Remove the (2) capscrews and nuts securing the roller clamps to each end of the cutting unit (Fig. 1). Remove the roller.

Note: On the Flex 18 and Flex 21, replace the roller with the roller/scrapper assembly included in the kit. Use the following instructions to verify that the scraper is properly adjusted.

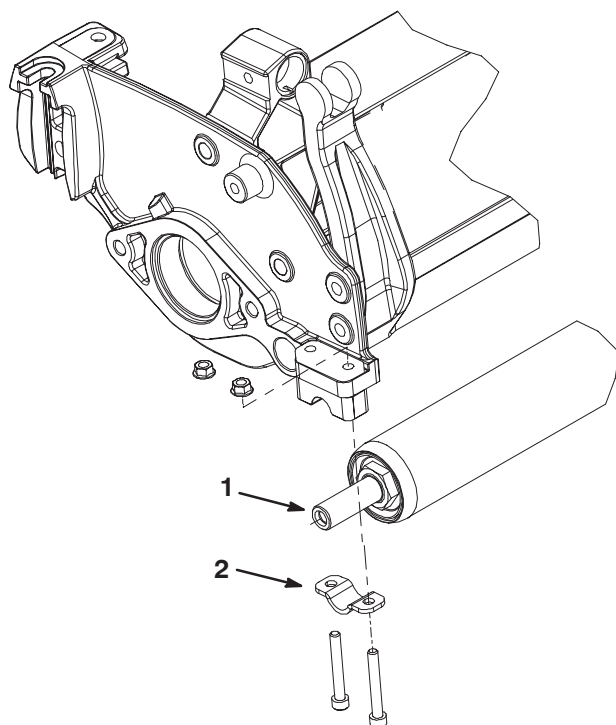


Figure 1

1. Rear roller 2. Roller clamp

3. Loosely install the roller scraper to each end of the roller with a clamp block, capscrew and nut. Position the components as shown in figure 2.
4. Loosely install the roller to the cutting unit with the capscrews, clamps and nuts previously removed (Fig. 2).

5. Center the roller on the cutting unit and tighten the roller clamp capscrews and nuts (Fig. 2).
6. Center the scraper on the roller.
7. Move the scraper in or out in the clamps until the clearance between the scraper bar and roller is .015 to .030. Make sure the scraper is parallel to the roller and the level surface.
8. Rotate the scraper until the bottom edge is approximately 1/4 inch from the ground.
9. Tighten all the capscrews and nuts.

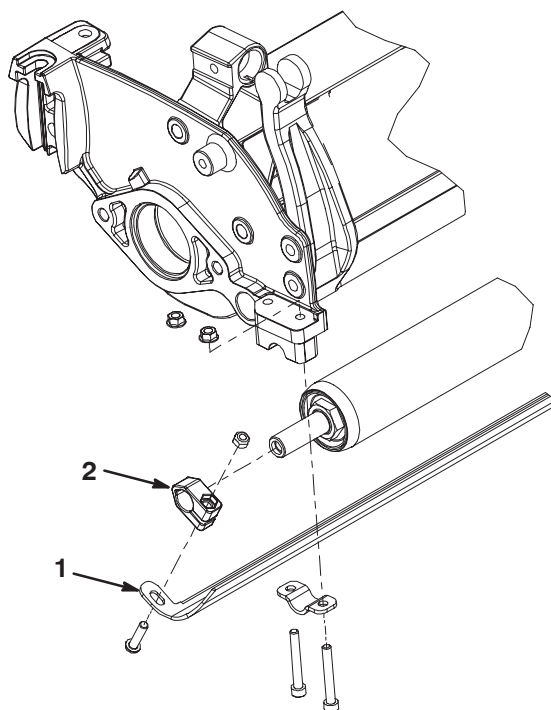


Figure 2

1. Roller scraper 2. Clamp block