Form No. 3357–915 Rev. C

Greasable Roller Kit

27” Rotary Cutting Unit for Groundsmaster® Traction Units

Part No. 112–5273
Part No. 112–5291

Installation Instructions

1. Remove the (2) screws securing each rear roller mount to the deck frame. Retain mounting screws for reuse.
2. Insert a roller mount onto each end of the roller shaft, positioning them as shown in figure 1.
3. Secure each roller mount to the deck frame with the (2) screws previously removed (Fig. 1).

Important Make sure the grease groove in each roller mount aligns with the grease hole in each end of the roller shaft. To help align the groove and hole, there is also an alignment mark on one end of the roller shaft.

4. Thread a grease fitting into the top of each roller mount (Fig. 1).
5. Mount a skid bracket to the bottom of each roller mount with a 3/8 screws.
6. Lubricate with No. 2 general purpose lithium base grease or molybdenum base grease, initially and after every 50 hours of operation. Wipe grease fitting clean after greasing.

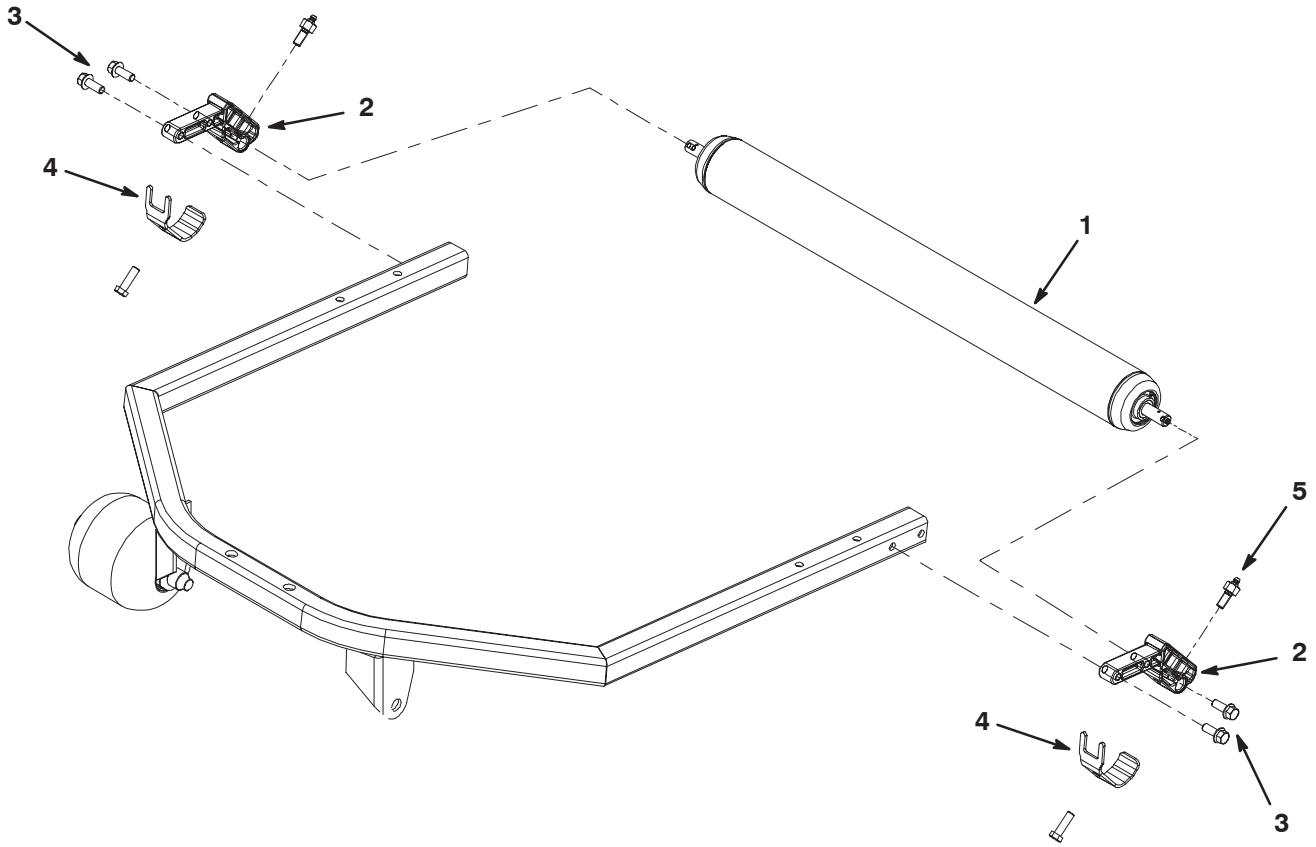


Figure 1

1. Roller
2. Roller mount (2)
3. Roller mount screws
4. Skid bracket
5. Grease fitting

© 2007 by The Toro Company
8111 Lyndale Avenue South
Bloomington, MN 55420-1196

All Rights Reserved
Printed in the USA