



Backrest Extension Kit

Grammer Seat for Toro® Commercial Traction Unit

Model No. 119-7718

Model No. 119-7719

Form No. 3365-301 Rev B

Installation Instructions

Installation

1. Position the machine on a level surface, lower the cutting unit(s), stop the engine, engage the parking brake and remove the key from the ignition.
2. Loosen the two screws securing the seat cushion to the seat back (Figure 1).

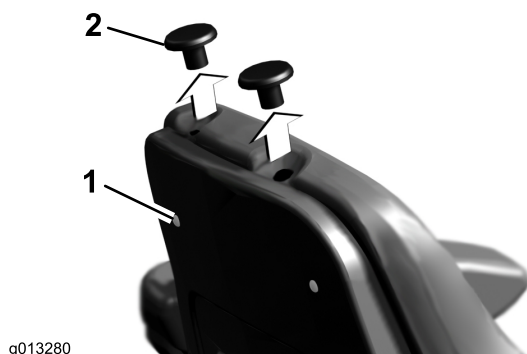


Figure 1

1. Screws (2)
2. Plugs (2)

3. Remove the two plugs from the holes in the top of the seat cushion (Figure 1). If the plugs cannot be easily removed from the top of the seat, loosen the two seat back screws some more.
4. Insert two rubber washers onto each backrest extension bushing (Figure 2).

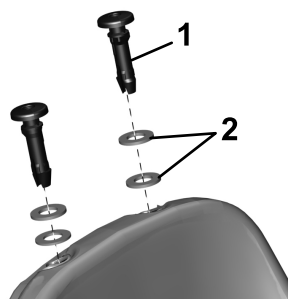


Figure 2

1. Backrest extension bushing (2)
2. Rubber washer (2 on each bushing)

5. Insert a backrest extension bushing into each hole on the top of the seat (Figure 2). Make sure the ratchet pins inside the bushings are positioned toward the center of the seat back (Figure 3).

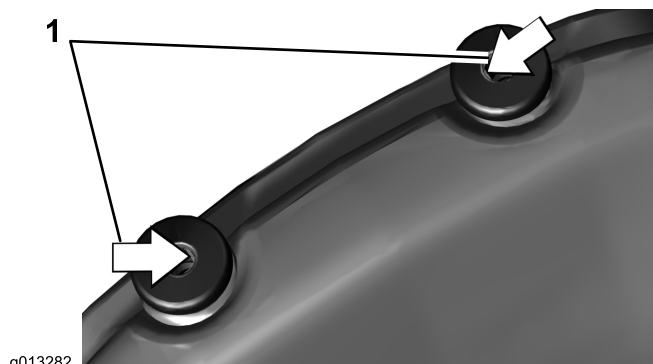


Figure 3

1. Bushing ratchet pins

6. Tighten the two screws securing the seat cushion to the seat back.
7. Insert the backrest extension tubes into the bushings and adjust to the desired height (Figure 4).

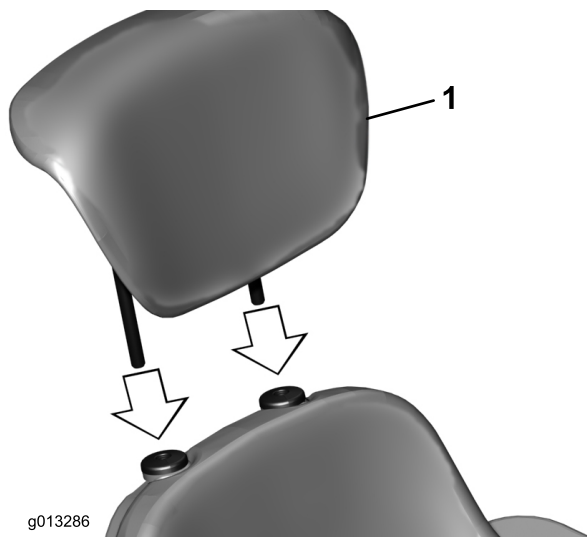


Figure 4

1. Backrest extension