ITALIAN - FORM NO. 3320-103

TORO®

MODEL AFFECTED: 1132 SNOWTHROWER
MODEL 38160-900001 & UP

OPERATOR'S MANUAL ADDENDUM

HEADLIGHT INSTALLATION

Remove upper capscrew, washers and locknut, securing escutcheon plate to right handle.

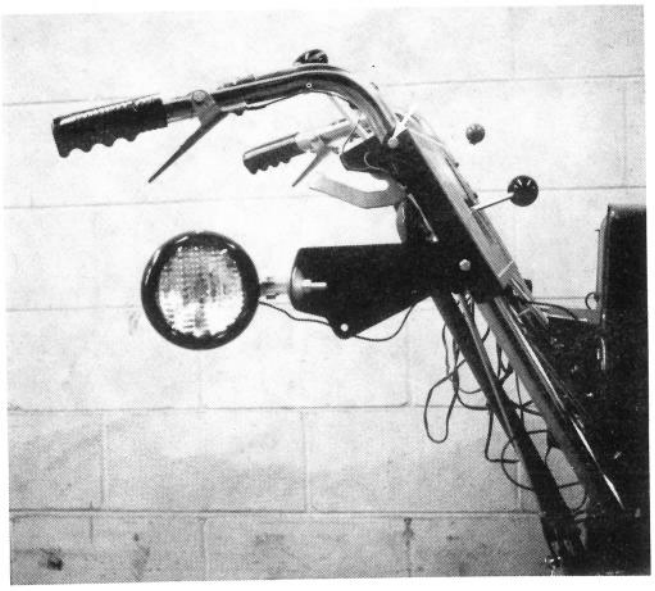

Pivot bracket and light assembly upward and re-secure to escutcheon plate and handle using fasteners removed in previous step.

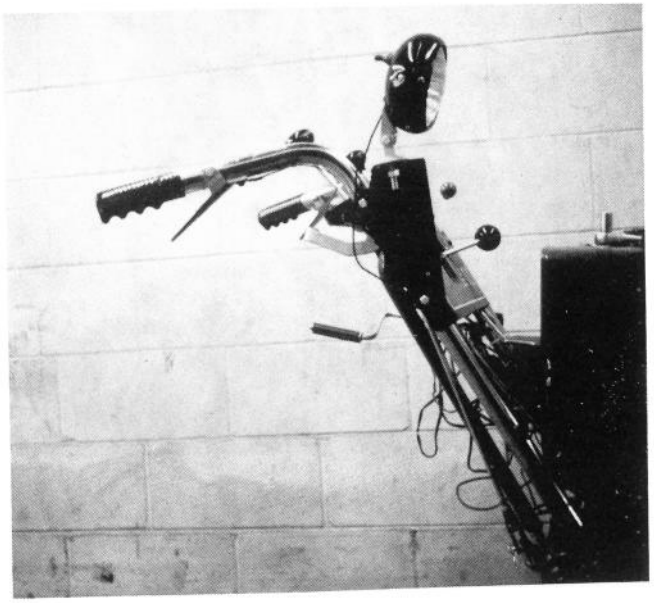

Plug black wire from light into black wire from wire harness.

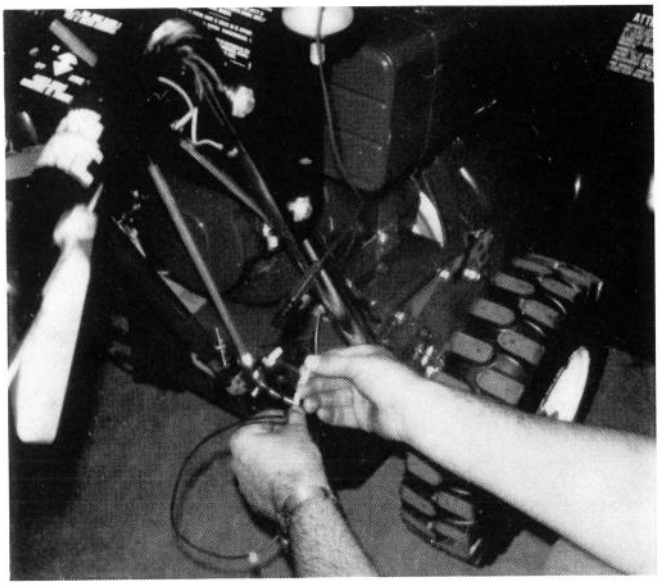

Using wire retainers, secure wire to handle.

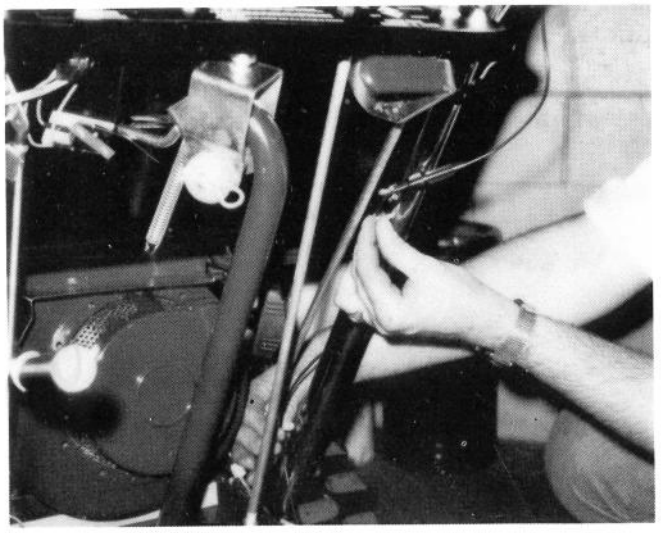

Note: If excess wire accumulates at lower part of handle, wrap wire around handle or tape to handle.

COPYRIGHT © ALL RIGHTS RESERVED
The Toro Company — 1978
MINNEAPOLIS, MN 55420 — U.S.A.

PRICE $1.00

TORO®

MODELLO AFFECTTATO: 1132 SGOMBRANEVE
MODELLO 38160-900001 E SU

GUIDA PER L'ACQUIRENTE APPENDICE

INSTALLALIONE DELLA LUCE DEI FARO

Rimuovete il tappo vitti esagnoli superiore, rondellas, e dadi di tenuta, segurando la stemma placea diestra della manovella.

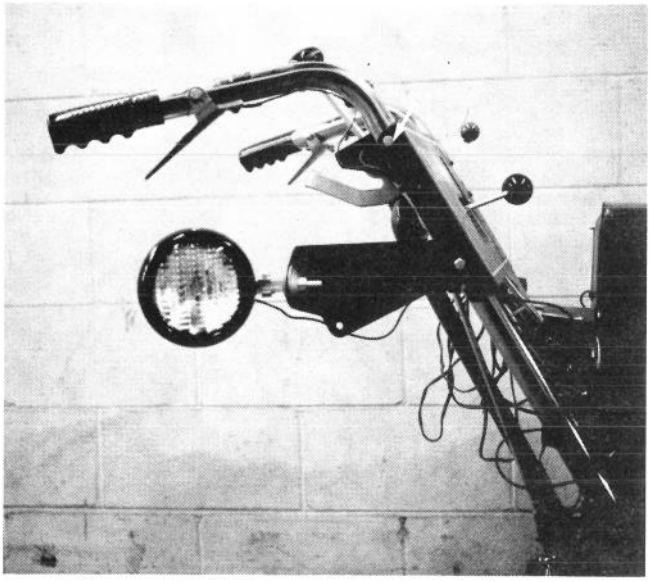

Giraré sú il braccio e riunione della luche piu sopra metteré al sicuró della piastra d'acciario e ansi la manovella, usando dei fermaglio, eliminate prima.

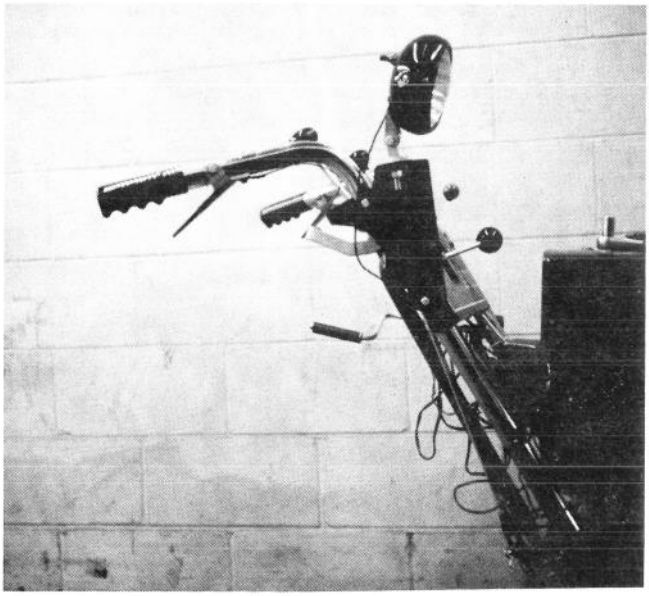

Assicuraré il filo nero della luce a il filo nero dei bardatura.

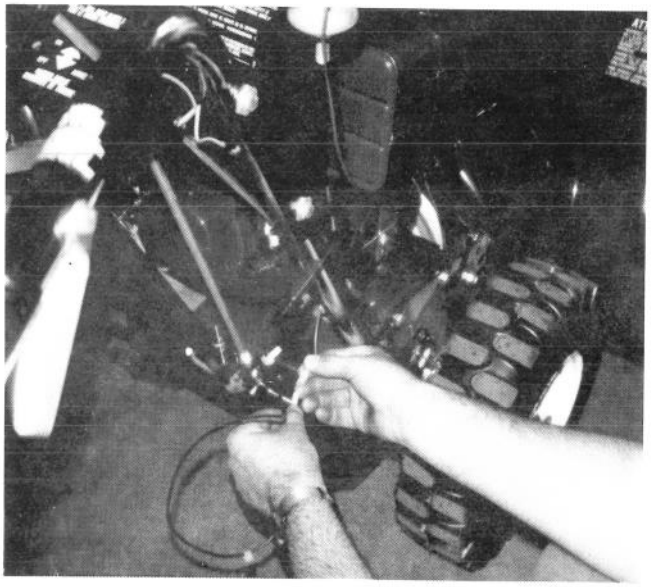

Usaré il filo del seguaci, aseguri filo della manovella.

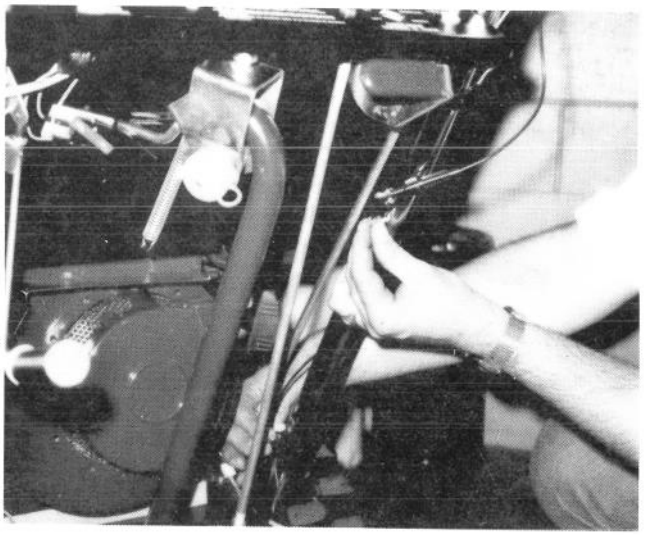

Nota: Si, il filo a piu eccesso, ammassaré la parte piu basso della manovella o metteré nastro.

Copia proprietà riservata a
Toro Company — 1978
Minneapolis, MN 55420 Stati Uniti

Prezzo $1.00