


Motif 48 - Parts List

Original Version: EN
Issue : 01.10.13
Codes: 433H
From Serial: 314000001 and up

Main Assembly

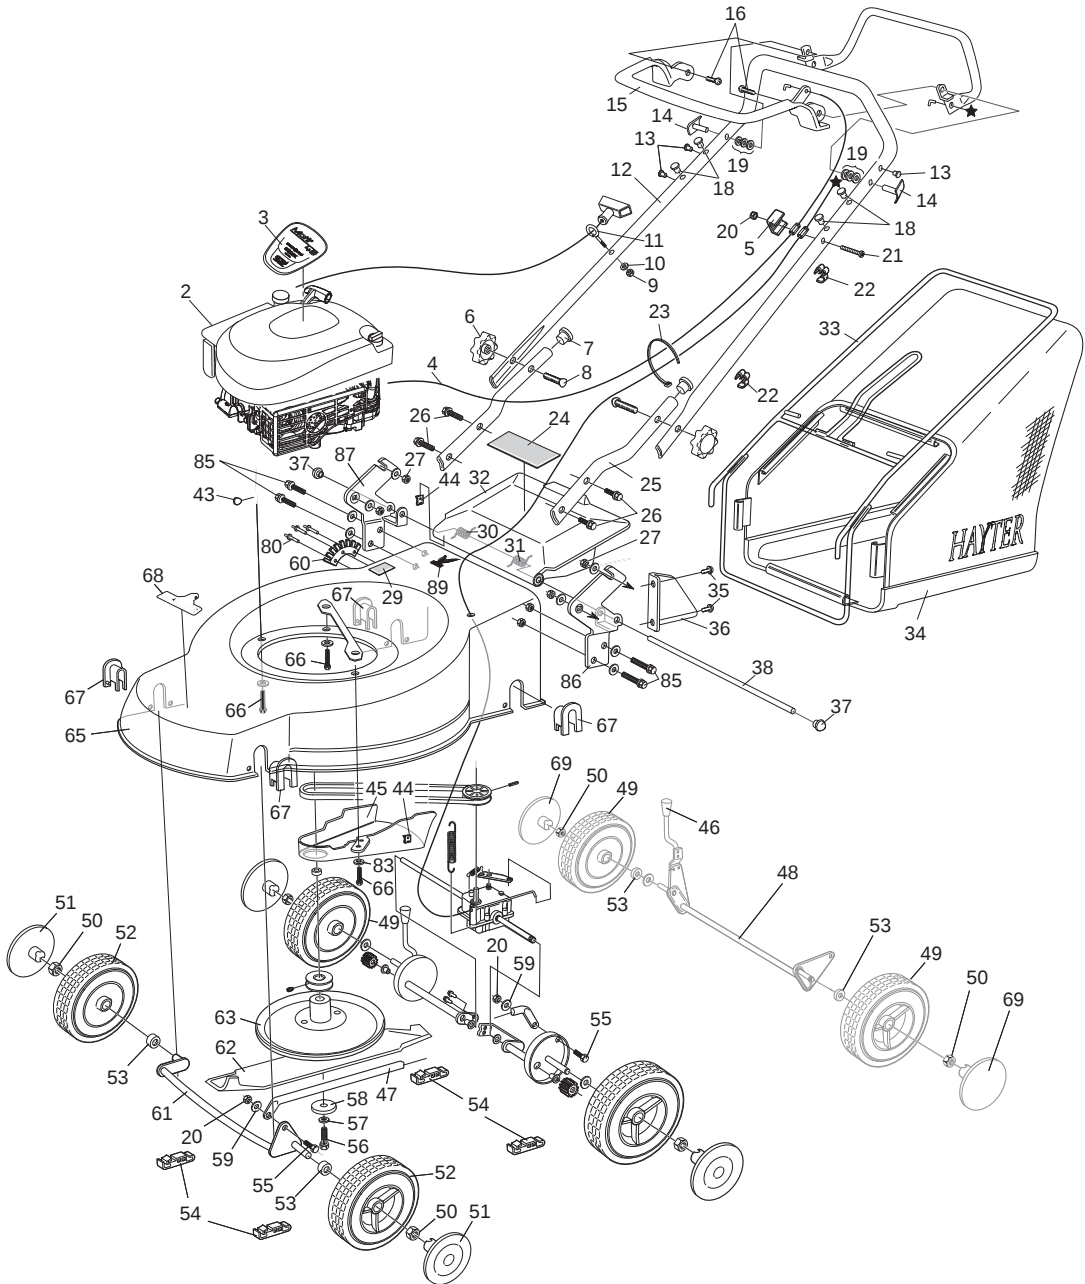


Item No	Description	Part No.	QTY	Notes	Item No	Description	Part No.	QTY	Notes
02	ENGINE B&S SERIES 650 XVB COVE	111-6624	1		38	DEFLECTOR PIN 6*385	433007	1	
03	DECAL ENGINE MOTIF 48(RS)	111-6687	1		43	KEY WOODRUFF 3/16"*5/8"	1662	1	
04	CABLE ENGINE BRAKE	111-3342	1		44	CLIP BELT COVER	100.000.801	2	
05	FITTING HANDLEBAR	411035	1		45	BELT COVER 48	100.000.800	1	
06	KNOB M8 HANDLEBAR	480088	2		46	KNOB HOC-GRIFF	100.000.828	1	
07	PLUG TUBE 7/8"*16g E	300160	2		47	CONNECTING ROD 48 PUSH	433011W	1	
08	BOLT HANDLEBAR M8*45	HY226024	2		48	AXLE REAR 48 PUSH W/A	433016W	1	
09	NUT M6 NYLOC 'P' TYPE GD 8	09544	1		49	WHEEL REAR 200 WAFFEL	100.000.401	2	
10	WASHER PLAIN M6*12*1.6	09472	1		50	M12 NYLOC EXTRA THIN	100.000.604	4	
11	GUIDE ROPE	305093	1		51	TRIM WHEEL 180 BLACK(RADCAPPE)	100.033.691	2	
12	UPPER HANDLEBAR	305145W	1		52	WHEEL FRONT 180 WAFFEL	100.022.836	2	
13	FASTENER DRIVE 6.5	341033	3		53	AXLE SPACER	100.000.792	4	
14	PIN PIVOT	340182	2		54	AXLE RETAINER	100.000.897	4	
15	LEVER ENGINE	340179	1		55	M6*6 SHOULDER SCREW	100.000.576	2	
16	SCREW DIA 6*20 PT PAN FLANGE	09687	2		56	BOLT UNF	09118	1	
18	FASTENER DRIVE	300144	4		57	WASHER SPRING 3/8 SC	09273	1	
19	WASHER NYLON 19*11*1.6	09688	6		58	DISTANCE PIECE CUTTERBAR	HY4014	1	
20	NUT M6 NYLOC 'T' TYPE	09438	4		59	WASHER M6	100.000.630	2	
21	BOLT M6*40	ZBH1F040U	1		60	PLATE RATCHET HOC	432020W	1	
22	GUIDE CABLE	410037	2		61	AXLE FRONT 48 W/A	433014W	1	
23	CABLE TIE	HY3966	1		62	CUTTERBAR 19"	480149	1	
24	DECAL - SAFETY PETROL	111-0083	1		63	FRICTION DISC W/A (BLACK)	397042W	1	
25	HANDLEBAR LOWER	432001W	2		65	DECK (GREEN)	111-0962-08	1	
26	SETSCREW M8*20	09368	4		66	SCREW TAPTITE UNC 3/8"*1 1/4"	09349	3	
27	NUT M8 NYL INSERT T TYPE	09441	4		67	AXLE SUPPORT	100.000.895	4	
29	LABEL HEIGHT OF CUT	320006	1		68	DECAL (HAYTER, LOGO 03)	410087	1	
30	SPRING TORSION REAR DEFL. RH	100.000.826	1		69	TRIM WHEEL 200 BLACK(RADCAPPE)	100.033.711	2	
31	SPRING TORSION REAR DEFL. LH	100.000.825	1		80	RIVET, POP .187DIA	MU710259	4	
32	REAR DEFLECTOR 48	100.000.077	1		83	WASHER 10.5 DIA * 30 O/D * 2.5	100.000.632	1	
33	FRAME GRASSBAG 48/53	433010W	1		85	SCREW TAPTITE M10*25 HEX W.HD	111-6759	4	
34	FABRIC GRASSBAG	433003	1		86	BRACKET HANDLEBAR LH	111-0964-03	1	
35	SCREW PAN HEAD M5*12 TAPTITE	10-11-029	2		87	BRACKET HANDLEBAR RH	111-0965-03	1	
36	PLATE DISCHARGE	432021W	1		89	DECAL - MADE IN BRITAIN	111-6625	1	
37	STARLUX END CAP 6MM	100.000.967	2						

Motif 48 - Declaration Of Conformity

EC DECLARATION OF CONFORMITY

Manufactured by: HAYTER LIMITED,
Address: Spellbrook, Bishop's Stortford, Herts. CM23 4BU. ENGLAND
declare that the lawnmower :



Model name:	Motif 48 Push
Type:	Pedestrian rotary
Model No:	CODE 433
Cutting width:	48 cm
Speed of rotation of the cutting device:	2750 rpm
Engine manufacturer:	Briggs & Stratton
Speed of rotation of engine:	2750 rpm
Serial No. Range:	314000001 and up

Complies with the provisions of Directive: 2006/42/EC Essential Health & Safety Requirements Relating to the Design & Construction of Machinery and Safety Components and the regulations transposed into national law.

Also Directive 2004/108/EEC Electromagnetic Compatibility and the regulations transposed into national law.

Also Directive 2000/14/EC Noise emission in the environment by equipment for use outdoors, as amended and the regulations transposed into national law.

Procedure applied for the conformity assessment: ANNEX VI, procedure 1.

Notified Body: Sound Research Laboratories Ltd, Holbrook House, Little Waldingfield, Sudbury, Suffolk.
CO10 0TH. ENGLAND

Notified body identification No: 1088

Measured sound power level:	95 dB(A)
Guaranteed sound power level:	96 dB(A)

Signed

S.A Maryniak
(Technical Director)

Date: 18.09.13
Declaration done and technical documentation kept at:
HAYTER LIMITED
Spellbrook, Bishop's Stortford,
Herts. CM23 4BU ENGLAND

VIBRATION INFORMATION

Hand / Arm Vibration Level at the Operator Position measured in accordance with European Standard EN 836:

Measured Vibration Level ahv =	433	6	ms ⁻²
Uncertainty of measurement K =		1.5	ms ⁻²

SOUND PRESSURE INFORMATION

Sound Pressure Level at the Operator Position measured in accordance with European Standard EN 836:

Measured Sound Pressure Level L _{PA} =	84.5	dB(A)
Uncertainty of measurement K =	2	dB(A)

Serial No.