



MODEL NO. 51535C-8900001 & UP
MODEL NO. 51545C-8900001 & UP

OPERATOR'S MANUAL

450 TX AIR RAKE
550 TBX RAKE-O-VAC®

SAFETY INSTRUCTIONS



To assure optimum performance, and to gain knowledge of the appliance, it is essential that you or any other operator of the appliance read and understand the contents of this manual before operating appliance. Pay particular attention to the instructions highlighted by the safety alert symbol. Failure to comply with the safety instructions may result in personal injury.

1. Read and understand Operator's Manual before using appliance. Be thoroughly familiar with proper use of the appliance.
2. Never allow children to operate the appliance. It is not a toy. Never allow adults to operate unit without first reading the Operator's Manual.
3. Always wear safety goggles or other suitable eye protection.
4. Never operate the appliance in wet or damp conditions.
5. Do not use in rain.
6. Keep area of operation clear of all persons, particularly small children and pets.
7. Dress properly — Do not wear loose clothing or jewelry. They can be caught in moving parts. Always wear substantial footwear and long pants.
8. Use the right appliance — Do not use the appliance for any job except that for which it was intended.
9. To reduce the risk of electric shock, use only an approved optional Toro Extension Cord, or equivalent cord suitable for outdoor use. Replace damaged extension cord immediately.
10. Extension cord — Properly connect extension cord to power supply cord to prevent disconnection of the cords (Fig. 6).
11. Avoid unintentional starting — Do not carry plugged-in appliance with finger on switch.
12. Don't abuse cord — never yank cord to disconnect from receptacle. Keep cord away from heat, oil and sharp edges. Replace damaged cords.
13. Never blow debris in the direction of bystanders.
14. Always be sure of your footing; keep a firm hold on the handle and walk, never run.
15. Stop the motor and unplug the supply cord whenever you leave the appliance, before cleaning the housing and when making any repairs or inspections.
16. When not in use, store your appliance in a dry place out of the reach of children.
17. Keep all fasteners tight to be sure the appliance is in safe working condition.
18. Never operate without proper guards or other protective safety devices in place.
19. Do not put hands or feet near rotating parts. Keep clear at all times.
20. If the appliance should start to vibrate abnormally, stop the motor and check immediately for the cause. Vibration is generally a warning of trouble.
21. Do not operate your appliance after it has been dropped or damaged. Return it to your nearest authorized service dealer for inspection and repair.
22. When servicing use only identical replacement parts. Replace or repair damaged cords.

ASSEMBLY INSTRUCTIONS

ATTACH OUTLET TUBES

1. Thread outlet tubes together with a twisting motion (Fig. 1).
2. Thread assembled tubes into blower outlet (Fig. 1).

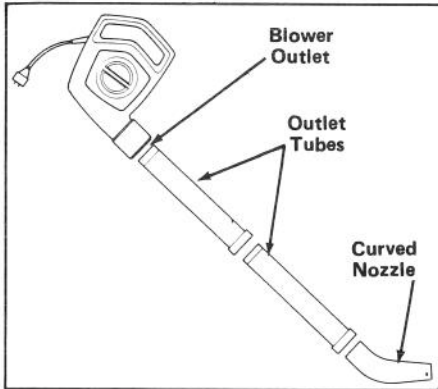


Fig.1

MOUNT VACUUM

(Optional on Model 51535 only)



CAUTION

Do not remove inlet cover when motor is operating. Motor impeller rotates for a few seconds after blower is turned off.

1. Turn off unit and unplug from electrical outlet.
2. Grasp inlet cover and rotate it counter-clockwise until locking tabs release. Remove cover (Fig. 2).

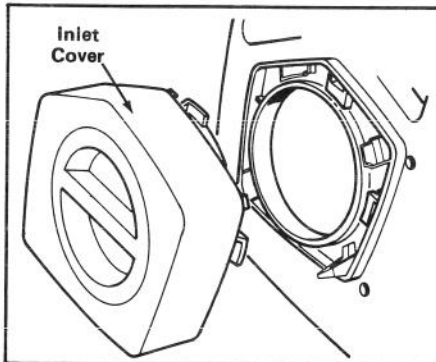


Fig. 2

3. Slide upper and lower tubes together as shown in Figure 3.

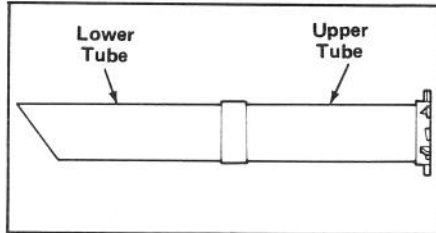


Fig. 3

4. Insert upper tube into blower inlet and rotate clockwise until tabs lock (Fig. 4). Angled end of lower tube should be positioned downward.

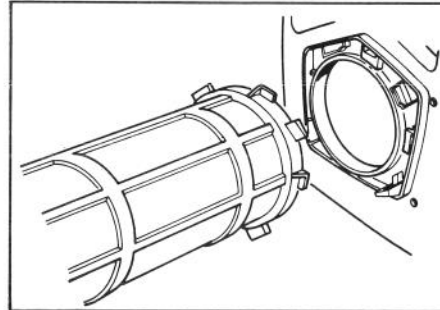


Fig. 4

5. Fit opening of bag over exhaust opening sleeve on blower. Pull strap tightly overlapping velcro tabs and secure (Fig. 5).

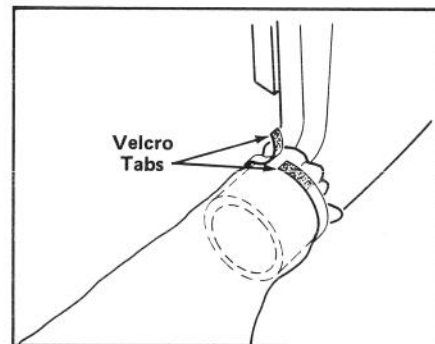


Fig. 5

BEFORE OPERATING

SECURING POWER SUPPLY CORD

NOTE: The proper extension cord is a requirement for safe and efficient use of your appliance. Use only a UL listed extension cord, recommended for outdoor use and with a maximum length of 100 feet (minimum 16 gauge).

1. Secure the power supply cord and a suitable extension cord as shown in figure 6.

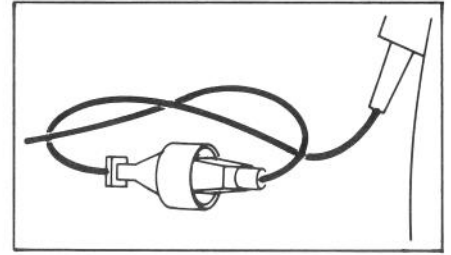


Fig. 6

OPERATING INSTRUCTIONS

CAUTION: Always wear safety goggles or other suitable eye protection, long pants and shoes while operating appliance.

mediate flow will allow you to easily direct debris from open doorways, screens, etc. Experience with the unit will indicate the amount of airflow necessary for each application.

BLOWER

Your blower will easily blow debris from patios, walkways, garages, lawns, bushes, etc. and many hard to reach places that debris can accumulate.

Most debris can be blown by using only the two blower tubes. Heavier debris in hard to reach places can be blown easier by using the curved nozzle. Lighter debris and larger areas can be blown easier by using the diffuser nozzle assembly (Model 51545 only).

Your blower features a variable inlet cover (Fig. 7) which allows you to adjust the volume of airflow by rotating the inlet adjustment knob. Low and inter-

(Model 51545 only)

For low and intermediate airflow applications, slide the two-speed switch to the low position and adjust the variable inlet cover for the desired flow. For high airflow applications, slide the two-speed switch to the high position and open the variable inlet cover completely.

VACUUM

(Optional on Model 51535 only)

Never run vacuum without vacuum bag attached as flying debris could cause injury. Always make sure bag zipper is closed when unit is in use.

WARNING: To reduce the risk of hazardous electrical shock, never use vacuum in rain or wet areas.

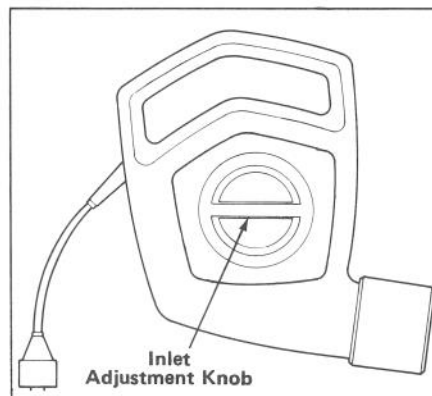


Fig. 7

1. Slide on/off switch to the "on" position. (For two speed units, performance is better when switch is in the high position).

2. Swing unit slowly back and forth over debris to be vacuumed. Do not force tube into pile of debris. Debris should not be stored in vacuum bag. Bag should be emptied after each use for more efficient operation. After about 3 uses bag should be thoroughly cleaned. Turn bag inside out and shake out dust and excess debris.

OPERATING INSTRUCTIONS

NOTE: To prevent debris and dust from falling out bag inlet when bag is being emptied, squeeze inlet and secure velcro tabs.

IMPORTANT: This unit is designed to pick up dry material, leaves, small twigs and bits of paper. Do not attempt to pick up stones, gravel, or broken glass as severe damage to fan blades may result.

MAINTENANCE

CLOGGING

If the unit should become clogged with debris the obstruction can usually be cleared by turning the unit off and then promptly compressing the bag while it is still inflated, thereby expelling air back out through the inlet tubes. This reverse airflow is usually sufficient to dislodge most obstructions.

If the restriction cannot be cleared by compressing the bag, then proceed as follows:

CAUTION

1. Turn off and unplug unit.
2. Remove tubes.
3. Carefully reach into opening and clear out debris.

BAG CLEANING

A dirty bag will obstruct the air flow, thereby reducing the performance of your vacuum. It is recommended that the bag be turned inside out and shaken out vigorously. After shaking, the

WARNING

The bag is made of material that will catch the majority of debris, such as small stones that may be thrown into it. However, under normal usage, this material is subject to deterioration and wear; therefore, check bags frequently. If bag is defective, replace it with a genuine TORO part.

bag should be returned to its original side out and reinstalled. This procedure should be performed on a regular basis. In addition, the bag should be washed, once a year.

IMPELLER WEAR

If a loss of performance is detected while operating blower, remove inlet cover and check impeller blades for wear. If blades are severely worn (Fig. 8), have impeller replaced by an authorized Toro service dealer.

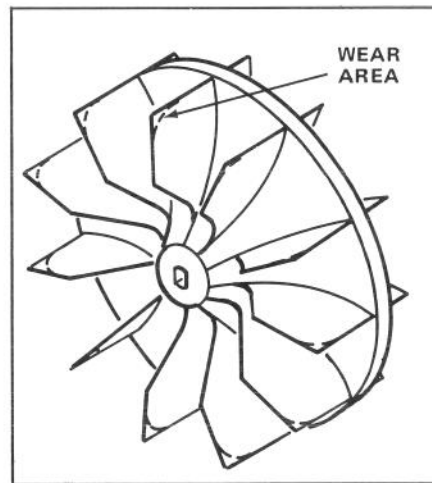


Fig. 8

CONVERSION TO BLOWER

To convert this unit from a vacuum back into a blower, simply remove vacuum bag and tubes. Replace inlet cover.

ACCESSORIES



RAKE-O-VAC BAGGING KIT
Model 51531C

PRODUCT IDENTIFICATION

A **MODEL AND SERIAL NUMBER** decal is on the blower housing. Always refer to specific numbers on this decal in correspondence and when replacement parts are needed.

TORO SERVICE SUPPORT

If help — concerning safety, set-up, operation and maintenance or troubleshooting — is ever needed, contact the local Authorized TORO Service Dealer or Distributor. Refer to the "Yellow Pages" for assistance. In addition to skilled service technicians, the dealer and distributor have factory approved accessories and replacement parts. Keep your TORO all TORO. Buy genuine TORO replacement parts and accessories.

