

# Hopper Latch Kit

## Dedicated-Bagging Riding Mower

Model No. 130-8488

### Installation Instructions

#### ⚠ WARNING

##### CALIFORNIA Proposition 65 Warning

This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

## Installation

### Loose Parts

Use the chart below to verify that all parts have been shipped.

Description	Qty.	Use
Latch	2	Install the latch.
Rivot	4	
Bolt	4	
Lock nut	4	
Washer	4	
Foam seal	1	Install the foam seal.

### Installing the Latch

1. Mark the locations for two holes on the left side of the hopper as shown in Figure 1.
2. Using a 7/32 inch drill bit, drill two holes into the hopper.
3. Repeat steps 1 and 2 for the right side of the hopper.


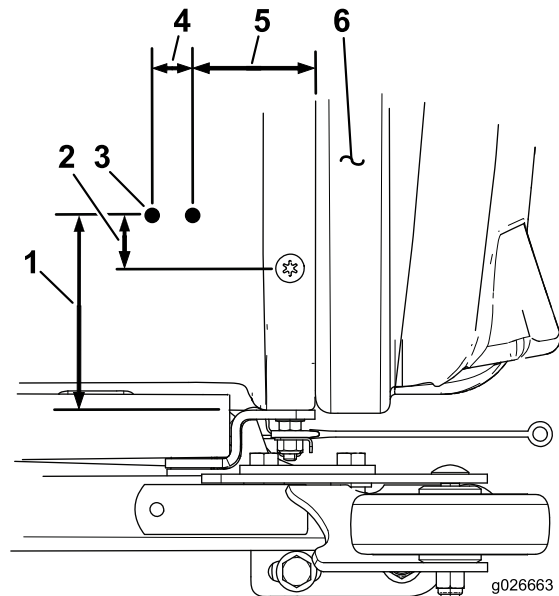


Figure 1

- |                           |                         |
|---------------------------|-------------------------|
| 1. 98.4 mm (3-7/8 inches) | 4. 22.2 mm (7/8 inch)   |
| 2. 25.4 mm (1 inch)       | 5. 53.9 mm (2-1/8 inch) |
| 3. Drill 7/32 inch holes  | 6. Left side of hopper  |




4. Mark the locations for two holes on the left side of the hopper door as shown in Figure 2.
5. Using a 13/64 inch drill bit, drill two holes into the hopper door.
6. Repeat steps 4 and 5 for the right side of the hopper door.

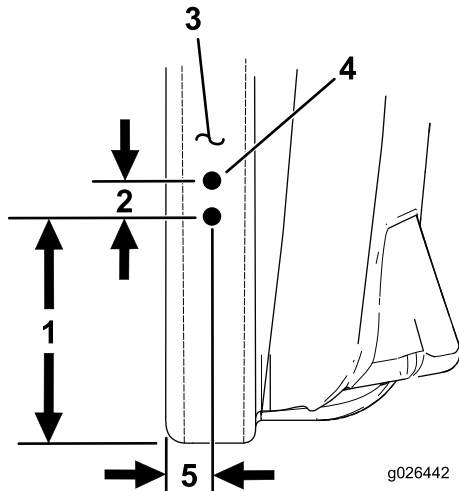

**Figure 2**

- |                             |                           |
|-----------------------------|---------------------------|
| 1. 95.3 mm (3-3/4 inches)   | 4. Drill 13/64 inch holes |
| 2. 11.1 mm (7/16 inch)      | 5. 19.1 mm (3/4 inch)     |
| 3. Left side of hopper door |                           |

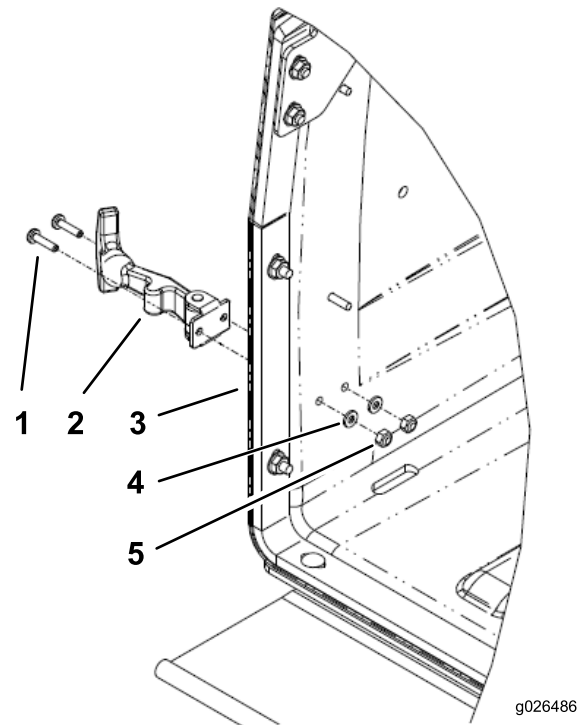


**Figure 3**

- |           |           |
|-----------|-----------|
| 1. Screw  | 4. Washer |
| 2. Latch  | 5. Nut    |
| 3. Hopper |           |

7. Install each latch bracket and handle using 2 screws, 2 washers, and 2 locknuts (Figure 3).

8. Install each latch keeper on to the hopper door using 2 rivets (Figure 4).

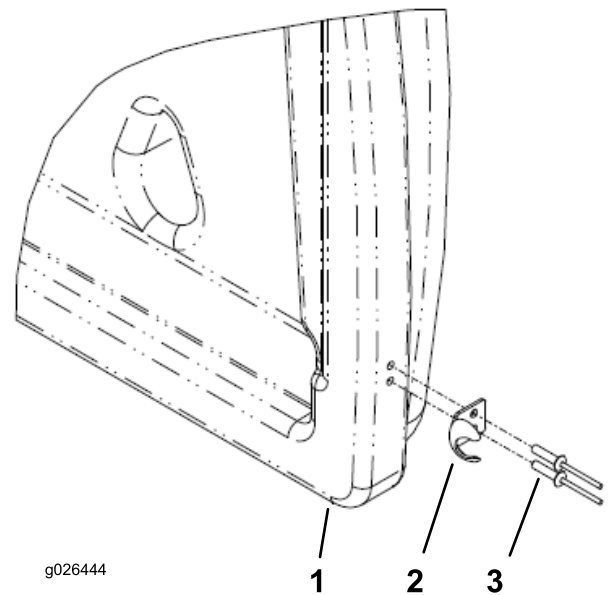


**Figure 4**

- |                 |           |
|-----------------|-----------|
| 1. Hopper door  | 3. Rivets |
| 2. Latch keeper |           |

# Installing the Foam Seal

1. Thoroughly clean the inside surfaces of the hopper door using soapy water (Figure 5).

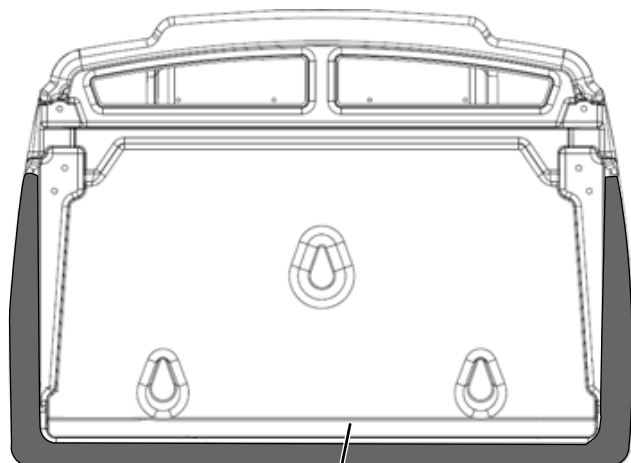


g026484

**1 2**  
**Figure 5**

1. Clean this area
  2. Hopper door
- 

2. Thoroughly dry the hopper door.
3. Cut the foam into 3 pieces as shown in Figure 6.
4. Peel paper backing from foam and apply to the outside edges of the surface that was cleaned in the previous step (Figure 6).

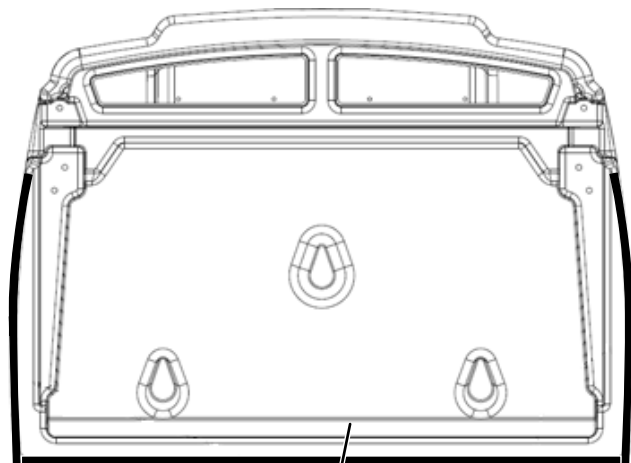

g026485

**1 2**  
**Figure 6**

1. Foam installed
  2. Hopper door
-

**Notes:**