

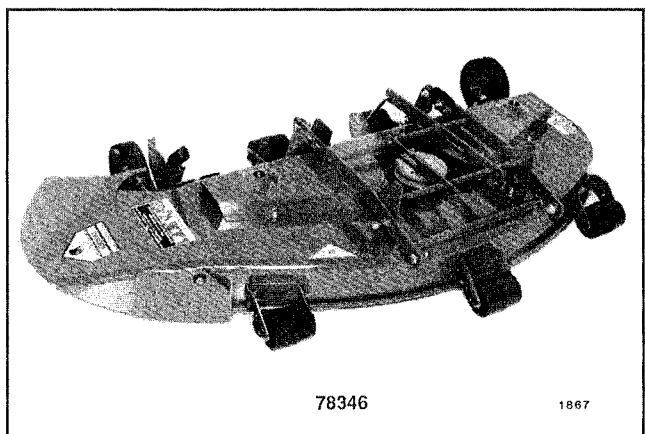


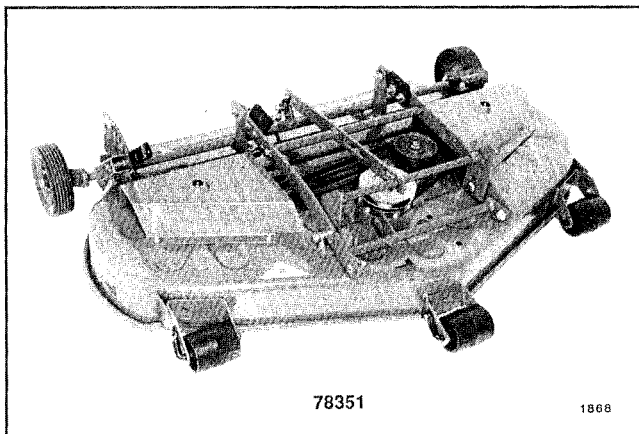

MODEL NO. 78300 - 4900001 & UP
78346 - 4900001 & UP
78351 - 4900001 & UP

INSTALLATION INSTRUCTIONS

WHEEL HORSE®
36 in.(92 cm) & 42 in.(107 cm) Low Cut Mower Decks - GT

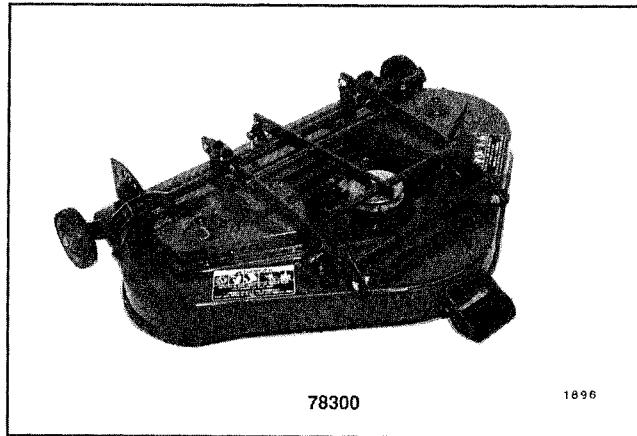

CONTENTS

	Page		Page
MODEL AND SERIAL NUMBER	1	TRANSPORT LEVEL STOP ADJUSTMENT ..	3
INSTALLATION	1-2	REMOVAL	4
ATTACH HEIGHT CONTROL LEVER	1	OPERATION	4
POSITION MOWER UNDER TRACTOR ..	1	MAINTENANCE AND STORAGE	4-5
ATTACH MOWER TO TRACTOR	1	LUBRICATION	4
INSTALL FRONT PULLEY SUPPORT	2	BLADE MAINTENANCE	5
INSTALL DRIVE BELT AND COVER	2	UNDERSIDE CLEANING	5
CHECKING MOWER LEVEL	2	REPLACEMENT BELTS	5
MOWER LEVEL	4	MOWER DRIVE BELT REPLACEMENT	5
TRACTOR LIFT BAR-TRUNNION AND		SPINDLE BELT REPLACEMENT	5
LIFT ROD ADJUSTMENT	4	GENERAL CARE AND STORAGE	5

SAFETY DECALS AND INSTRUCTIONS

Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or lost.



Right Side of Deck (78346)
Part Number 66-1340



Discharge Chute (78346)
Part Number 54-9220



Each Side of Deck
Left Side of Deck (78346)
Part Number 76-4070



Rear of Deck
Part Number 43-8480

MODEL AND SERIAL NUMBER

A Model and Serial Number identifies your Toro Wheel Horse attachment. These numbers should always be referred to when consulting with your dealer or factory concerning service, replacement parts, or questions you may have. For your reference, record numbers from Model and Serial Number plate on your attachment.

MODEL _____

SERIAL NO. _____

INSTALLATION

ATTACH HEIGHT CONTROL LEVER

Height control lever must be attached to Rear Discharge 42 in. (107 cm) Mower, as described below. All other Mowers are shipped completely assembled.

Raise rear of mower and support deck on both sides, using a double thickness of 2 x 4 wood blocks. Remove two bolts and nuts securing lift quadrant to right rear corner of mower deck (Fig. 1). Remove clamp holding gage wheel support rod. Install height control lever and spring as shown in Figure 1. Slip welded pin, on height control lever, into guide hole in gage wheel support. Position quadrant to hold height control lever in place and replace clamp, bolts and nuts. Tighten nuts securely and remove 2 x 4 blocks.

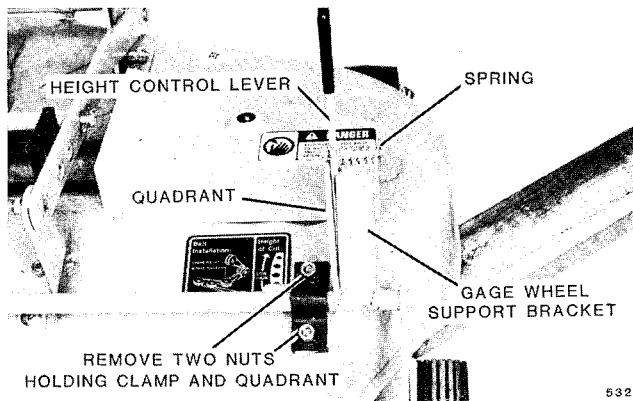


FIG. 1. Install Height Control Lever

POSITION MOWER UNDER TRACTOR

Place mower along right side of tractor. Position height control lever in lowest position (Fig. 2).

Turn front wheels of tractor fully left. Raise tractor attachment lift.

IMPORTANT

Before installation, check that all mower blade nuts are tight:

Blade Nut Torque 80-100 ft. lbs. (12-140 Nm)

Check that mower spindles have been lubricated. Use a pressure grease gun and #2 multi-purpose lithium grease. Grease fittings are on top of spindles on three-blade mowers and on base of spindle housings on two-blade mower.

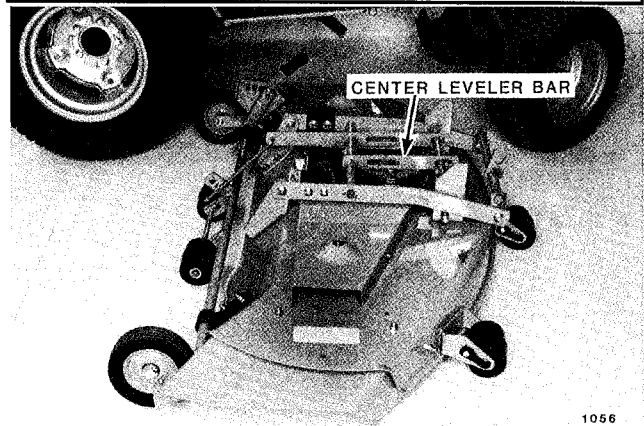


FIG. 2. Position Mower to Right of Tractor

Slide mower under tractor until mower center leveler bar is directly under right side of tractor frame.

ATTACH MOWER TO TRACTOR

Lower tractor attachment lift. Align lift bar and pin (attached to tractor) with slot in mower leveler bar (Figs. 2 & 3).

Push mower in until it is centered under tractor.

Open mid Attach-A-Matic hitch by pushing release button and pulling latch forward. (Fig. 4).

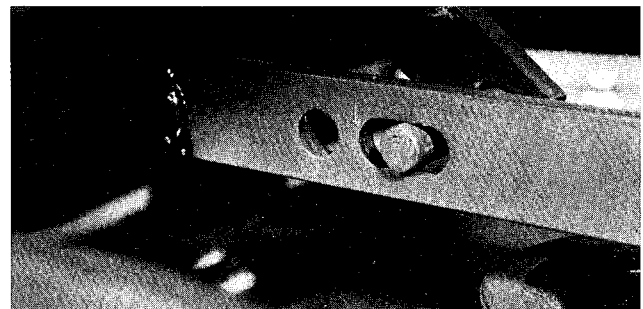


FIG. 3. Align the Pin with the Slot

Adjust mower hitch shaft so fork faces upward. Adjust mower so welded spacers are positioned between tractor hitch plates (Fig. 5).

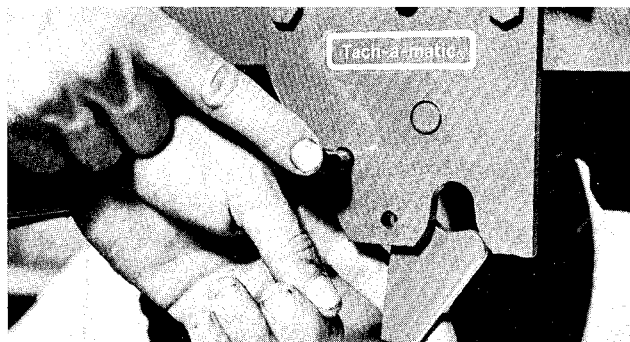


FIG. 4. Open the Mid-Attach-A-Matic Hitch

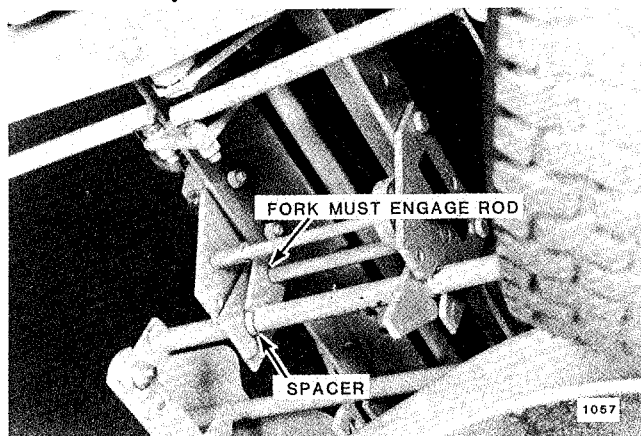


FIG. 5. Align Fork with Shaft

Lift mower with tractor attachment lift. NOTE: When using a manual attachment lift, be sure lift handle "locks" in raised position.

Close Attach-A-Matic hitch by moving latch rearward.

INSTALL FRONT PULLEY SUPPORT



FIG. 6. Open Front Attach-A-Matic Hitch

Open front Attach-A-Matic hitch by pushing release button and pulling forward on latch handle (Fig. 6).

Insert shaft of pulley support assembly into hitch slots and push latch handle rearward to lock latch (Fig. 7).

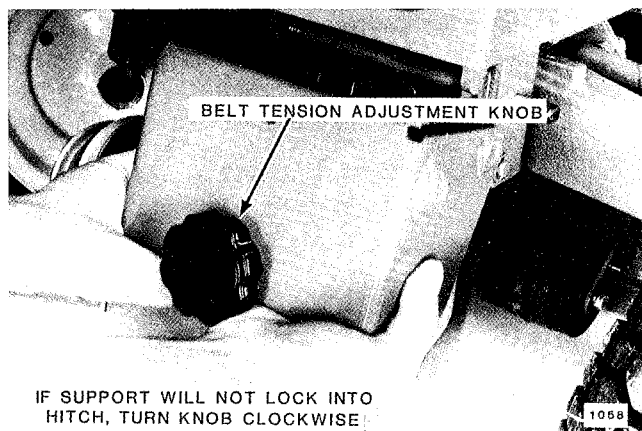


FIG. 7. Install Pulley Support

INSTALL DRIVE BELT AND COVER

Turn belt tension adjustment knob all the way clockwise (Fig. 7).

Install drive belt in groove of mower pulley and position belt strands around idler pulleys, with inside strand in "V" pulley and outside strand making a back bend around flat idler (Fig. 8). Place drive belt on inside groove of PTO pulley (Fig. 9).

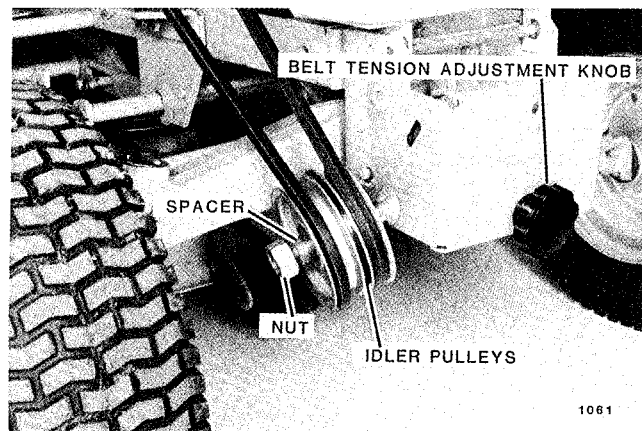


FIG. 8. Mower Front Idler Pulleys

Hold pulleys in against thrust collar and adjust drive belt tension by turning adjusting knob counterclockwise until top strand of drive belt can be depressed approximately 1 inch (2.5 cm) under moderate finger pressure at a mid-point between pulleys (Figs. 8 & 9).

Remove idler pulley and cover nut; make sure spacer remains on shaft (Fig. 8). Install cover with pilot pin in slot of support (Fig. 10). Reinstall cover nut and tighten.

CHECKING MOWER LEVEL

For optimum efficiency, level of mower should be

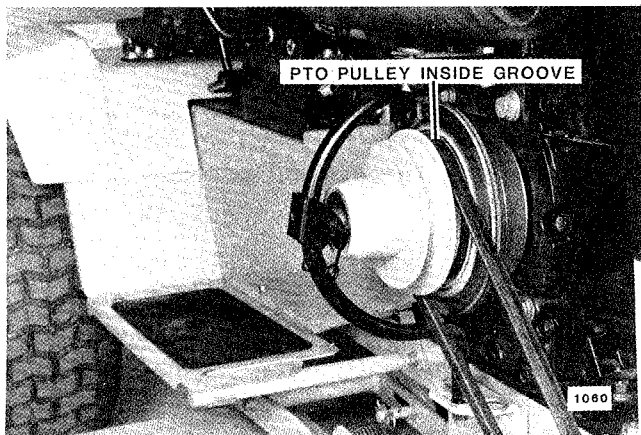


FIG. 9. Mower PTO Pulley

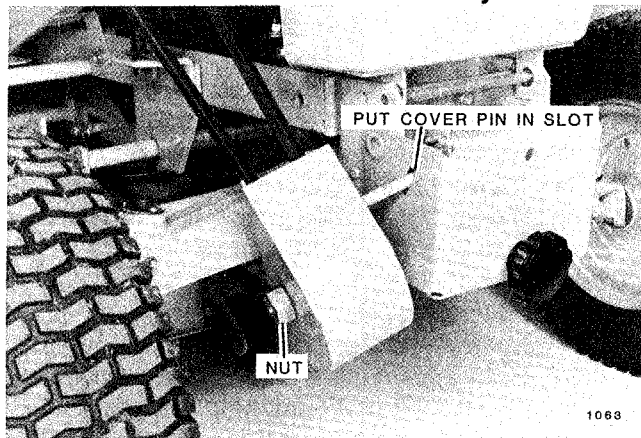


FIG. 10. Install Pulley Support Cover

checked at time of initial installation and periodically as a check to see if alignment is maintained.

MOWER LEVEL

Position tractor on a level surface. Adjust all four tires to 12 lbs. pressure. Place mower height control lever in middle cutting position.

Turn mower blades front-to-back. Adjust distance from surface to blade tips equal to 1/8 inch front low (Figs. 11, 12, 13 and 15).

Under some unusual mowing conditions, mower may leave a "streak" of uncut grass, which can be caused by any of the following conditons:

1. Engine being operated at less than full throttle.
2. Dull blades or underside of mower deck clogged with matted grass.
3. Ground speed too high for conditions-adjust to 2 mph (3.2 km/h), or less if necessary.
4. Streaking only on turns indicates turns are being made too sharply.

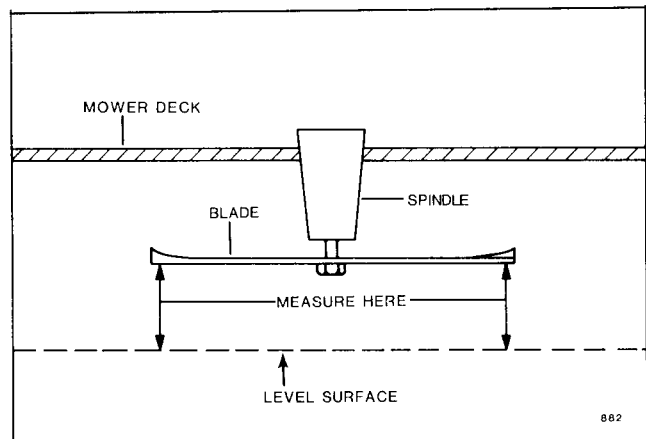


FIG. 11. Mower Level Measurement

5. If blades have been sharpened a number of times, they may be too short to "overlap" each other, and must be replaced.

If streaking persists after above possibilities have been eliminated as cause, adjust mower until deck is level, then turn adjustment nut "in" one complete turn, to shorten level adjustment rod and slightly raise front of mower.

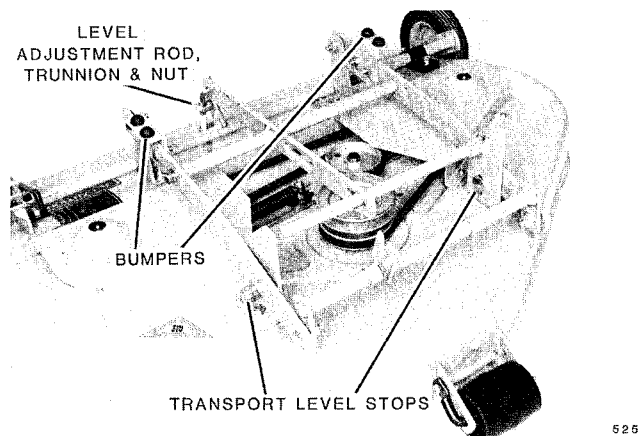


FIG. 12. 36 in. (92 cm) Mower Adjustment

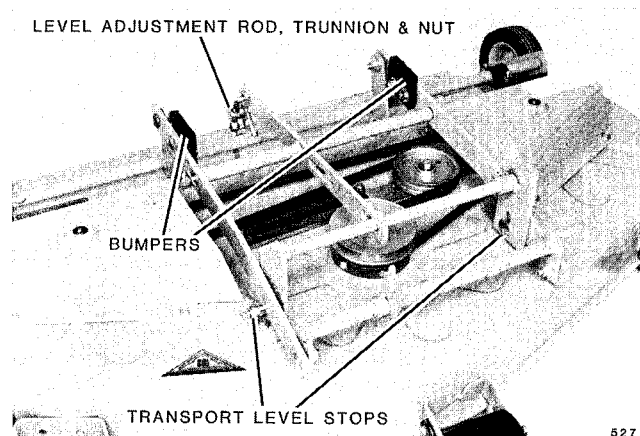


FIG. 13. 42 in. (107 cm) Rear Discharge Mower Adjustments

TRACTOR LIFT BAR-TRUNNION AND LIFT ROD ADJUSTMENT

This adjustment involves parts located on tractor (Fig. 14). Trunnion on lift chain should be adjusted so that bumpers on draft bars of mower suspension come in contact with tractor footrests when mower is fully raised, with trunnion stud in rear hole of tractor lift lever.

TRANSPORT LEVEL STOP ADJUSTMENT

For normal operation mower level stops should be adjusted so that carriage bolt heads are set at bottom of bracket slots. If mower is not level in fully raised position, level stops may be adjusted by moving them in bracket slots as required. (Fig. 12, 13 and 15).

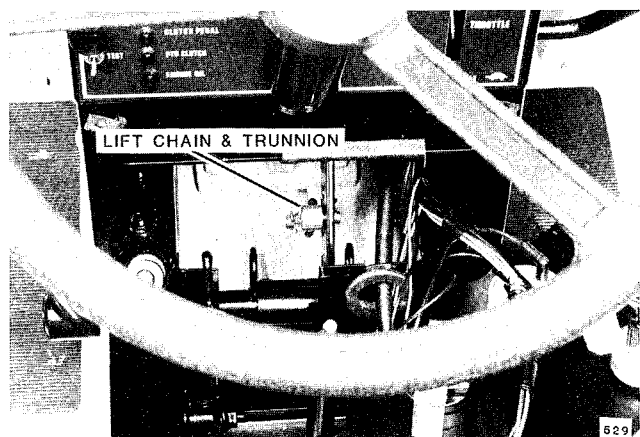


FIG. 14. Tractor Lift Bar Trunnion and Lift Rod Adjustment

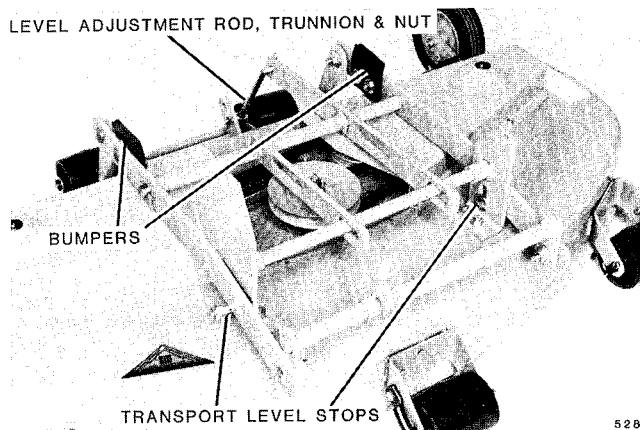


FIG. 15. 42 in. (107 cm) Side Discharge Mower Adjustments

REMOVAL

Set mower gage wheels in lowest cutting position and lower mower with tractor lift. Turn front wheels all the way left.

Turn drive belt tension adjustment knob clockwise all the way and remove belt from mower.

Push Attach-A-Matic lock release button in and open latch, releasing mower hitch shaft.

Slide mower right until lift bar pin comes out of slot in leveler bar.

Raise tractor lift and slide mower out from under right side of tractor.

Remove drive belt from PTO clutch pulley. Remove pulley support assembly by pushing front hitch lock release button in and opening latch. Drive belt need not be removed from pulley support assembly.

OPERATION

IMPORTANT: Every time mower is installed, check for proper operation of PTO clutch and brake. Adjustment of PTO is covered in Operator's Manual. First time mower is used, or after installing a new mower drive belt, recheck belt tension after first 20 minutes of operation (allow belt to cool before checking tension).

1. Disengage tractor PTO clutch and start engine. Lift mower with tractor lift to remove weight of mower from gage wheels. **Note:** Never stand on mower.

2. Move mower height control lever to hole on quadrant corresponding to desired cutting height. This can be set for 1 to 3 in. (2.6 to 7.8 cm) in 1/2 in. (1.2 cm) intervals. Recommended cutting height is 2-3 in. (5-7.6 cm) for most applications.

3. Lower mower and set engine speed to full throttle. Engage PTO clutch. Regulate ground speed with transmission to 2-3.5 mph (3.2-5.6 km/h)* for best cutting results on average lawns.

Uneven cutting often results from excessive ground speed. To correct, reduce ground speed with transmission while maintaining full throttle setting.

4. To mow extra tall grass, raise mower to its highest position for a first cutting and use a slow ground speed. Then cut to normal height.

! DANGER !

Keep all shields and mower discharge chute in place. Never attempt to clear discharge areas or mower blades, or make any adjustments or repairs, without first disengaging PTO clutch and removing ignition key.

*Average walking speed is 2.5 mph (4 km/h).

MAINTENANCE AND STORAGE

LUBRICATION

Mower spindle bearings should be lubricated at 50 operating hour intervals. Use a pressure type grease gun and #2 multi-purpose lithium grease to lubricate spindle bearings. Four to six pumps of a hand type

grease gun will usually fill each spindle after 50 hours use. Grease zerks are conveniently located at top of spindle shafts on three-blade mowers. Lubricate mower gage wheels every 25 hours.

Lubricate pivoting arms and levers at 25 hour intervals with light machine oil applied directly to wear surfaces. Anti-scalp rollers should NOT be lubricated.

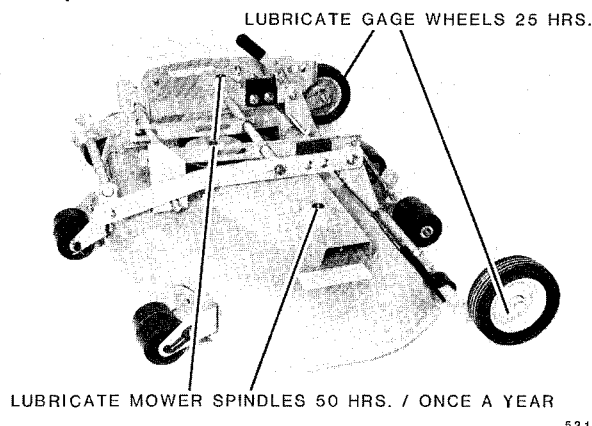


FIG. 16. Three Blade Mower Lubrication Fittings

BLADE MAINTENANCE

 CAUTION 
Sharp edges of mower blades can cut you during blade maintenance or adjustment. Use suitable covering over cutting edges of blade to prevent bodily harm.

To obtain optimum mowing results, mower blades should be kept sharp and well balanced. To sharpen blades, remove mower from tractor and invert mower. Remove blade attaching nuts and washers from end of spindles and remove blades. A short piece of 2 x 4 lumber may be placed between side of mower deck and blade to "lock" it in position or use wrench between blade and spindle when loosening attaching hardware.

File or grind blades evenly. Take care to retain angle of original cutting edge. Blade balance can be checked on an inexpensive blade balancer, available at most hardware stores.

Reinstall blades with lift area (turned up section) facing mower deck. Tighten blade attaching nuts to a torque of 80-100 ft. lbs. (112-140 Nm).

UNDERSIDE CLEANING

It is of vital importance to clean underside of mower deck frequently. Accumulation of matted clippings seriously impairs mower's ability to "lift" grass blades into cutting position and discharge clippings evenly. Matted

grass clogging underside of mower is often times a cause of uneven cutting.

REPLACEMENT BELTS

Be sure to purchase genuine Wheel Horse belts for replacement purposes as these belts are designed specifically for each application.

MOWER DRIVE BELT REPLACEMENT (Refer to Figs. 7 thru 10)

Turn belt adjustment knob all the way clockwise.

Remove belt cover retaining nut and remove cover being careful not to lose pulley cover spacer. Reinstall nut finger tight to avoid possibility of pulleys and spacers coming off.

Remove belt from PTO, mower and idler pulleys and examine condition of pulleys making sure pulley grooves and bearings are in good condition.

Install replacement belt and adjust tension as outlined under "Install Drive Belt and Cover" Section in this manual.

SPINDLE BELT REPLACEMENT

Remove mower from tractor.

Remove two side belt covers and note routing of belt. Remove belt. Check to be sure all pulleys work freely. Install a new belt in accordance with belt diagram located on mower. Replace both belt covers.

GENERAL CARE AND STORAGE

Top of mower deck should be washed with a garden hose after each use. A mild automotive detergent may be used to remove stubborn dirt. After washing, allow mower to dry, then start tractor and engage mower for approximately 1 minute to remove excess water from belt and pulleys.

Touch up painted surfaces with a coat of "Wheel Horse Red", available from your authorized Wheel Horse dealer in aerosol cans.

Store mower in a clean, dry place or protect it with a weather-proof cover when stored outdoors.



Consumer
Products

THE TORO TOTAL COVERAGE GUARANTEE

A Full Two-Year Warranty (Limited Warranty for Commercial Use)

What Is Covered By This Express Warranty?

The Toro Company promises to repair any TORO Product used for residential purposes if defective in materials or workmanship for a period of two years from the date of purchase. The cost of parts and labor are included, but the customer pays the transportation costs.

Transportation within a 15 mile radius of the servicing dealer is covered under this warranty for two-stage snowthrowers, walk behind debris equipment and all TORO Wheel Horse riding products. Walk power mowers, single stage snowthrowers, and other products not specifically covered, are excluded from the transportation coverage provided by this warranty.

What Products Are Covered By This Warranty?

This warranty applies to all gasoline powered Consumer Products (including TORO Wheel Horse riding products). ProLine riding products, wide area walk behind mowers and 21" Commercial mowers without blade stop controls are covered by separate warranty statements.

How About Commercial Use?

TORO Consumer Products used for commercial, institutional or rental use are covered by a limited warranty for the following time periods from the date of purchase:

Products	Warranty Period
• Garden Tractors	
Chassis	1 year limited warranty
Engine	2 year limited warranty
• 21" Commercial Duty Walk Mower with blade stop controls	1 year limited warranty
• Lawn Tractors, Yard Tractors, Rear Engine Riders, 3.0 and 3.5 HP Edgers, Straight Shaft Trimmers, and Backpack Blowers	90 day limited warranty
• All Others	45 day limited warranty

How Do You Get Warranty Service?

Should you feel your TORO product contains a defect in material or workmanship, contact the dealer who sold you the product or any Authorized TORO Service Dealer or TORO Master Service Dealer. The Yellow Pages of your telephone directory is a good reference source. The dealer will either arrange service at his/her dealership or recommend another Authorized Service Dealer who may be more convenient. You may need proof of purchase (copy of registration card, sales receipt, etc.) for warranty validation.

If for any reason you are dissatisfied with the Service Dealer's analysis of the defect in materials or workmanship or if you need a referral to a TORO Service Dealer, please feel free to contact us at the following address:

Toro Customer Service Department
8111 Lyndale Avenue South
Bloomington, MN 55420-1196
612-888-8801

What Must You Do To Keep The Warranty In Effect?

You must maintain your TORO Product by following the maintenance procedures described in the operator's manual. Such routine maintenance, whether performed by a dealer or by you, is at your expense.

What Does This Warranty Not Cover? and

How Does Your State Law Relate To This Warranty?

There is no other express warranty except the TORO Starting Guarantee on GTS Engines. This express warranty does not cover:

- Cost of regular maintenance service or parts, such as filters, fuel, lubricants, tune-up parts, blade sharpening, brake and clutch adjustments.
- Any product or part which has been altered or misused or required replacement or repair due to normal wear, accidents, or lack of proper maintenance.
- Repairs necessary due to improper fuel, contaminants in the fuel system, or failure to properly prepare the fuel system prior to any period of non-use over three months.
- Pickup and delivery charges for distances beyond a 15 mile radius from an Authorized TORO Service Dealer (covered products only).

All repairs covered by this warranty must be performed by an Authorized TORO Service Dealer using Toro approved replacement parts.

Repair by an Authorized TORO Service Dealer is your sole remedy under this warranty.

The Toro Company is not liable for indirect, incidental or consequential damages in connection with the use of the TORO Products covered by this warranty, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under this warranty. Some states do not allow exclusions of incidental or consequential damages, so the above exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

COUNTRIES OTHER THAN THE UNITED STATES OR CANADA

Customers who have purchased TORO products exported from the United States or Canada should contact their TORO Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the TORO importer. If all other remedies fail, you may contact us at The Toro Company.