

TORO®

MODEL NO. 56132

**OPERATOR'S
MANUAL
ADDENDUM****825 RECYCLER® RIDER**

Due to a design change, the metal tab on top of the grass deflector is no longer welded in place. When installing the plastic discharge cover, the loose metal tab must also be installed. Please place these instructions with your Operator's Manual for future reference.

INSTALLING DISCHARGE COVER (Fig. 1)**WARNING**

Turn engine off and wait for all moving parts to stop. Remove spark plug wire from spark plug.

1. Lift grass deflector and position plastic discharge cover over long bolt.

2. Place metal tab on long bolt as shown in Figure 1.

3. Lower grass deflector and make sure edge of deflector is secured under metal tab.

**WARNING**

The metal tab must be used to fasten the grass deflector to the plastic discharge cover. If the grass deflector is not fastened securely to the discharge cover, the discharge cover could come loose during operation and discharged material could cause personal injury.

NOTE: If the plastic discharge cover is ever removed in order to side discharge or bag, be sure to save the metal tab with the plastic discharge cover for possible future reinstallation.

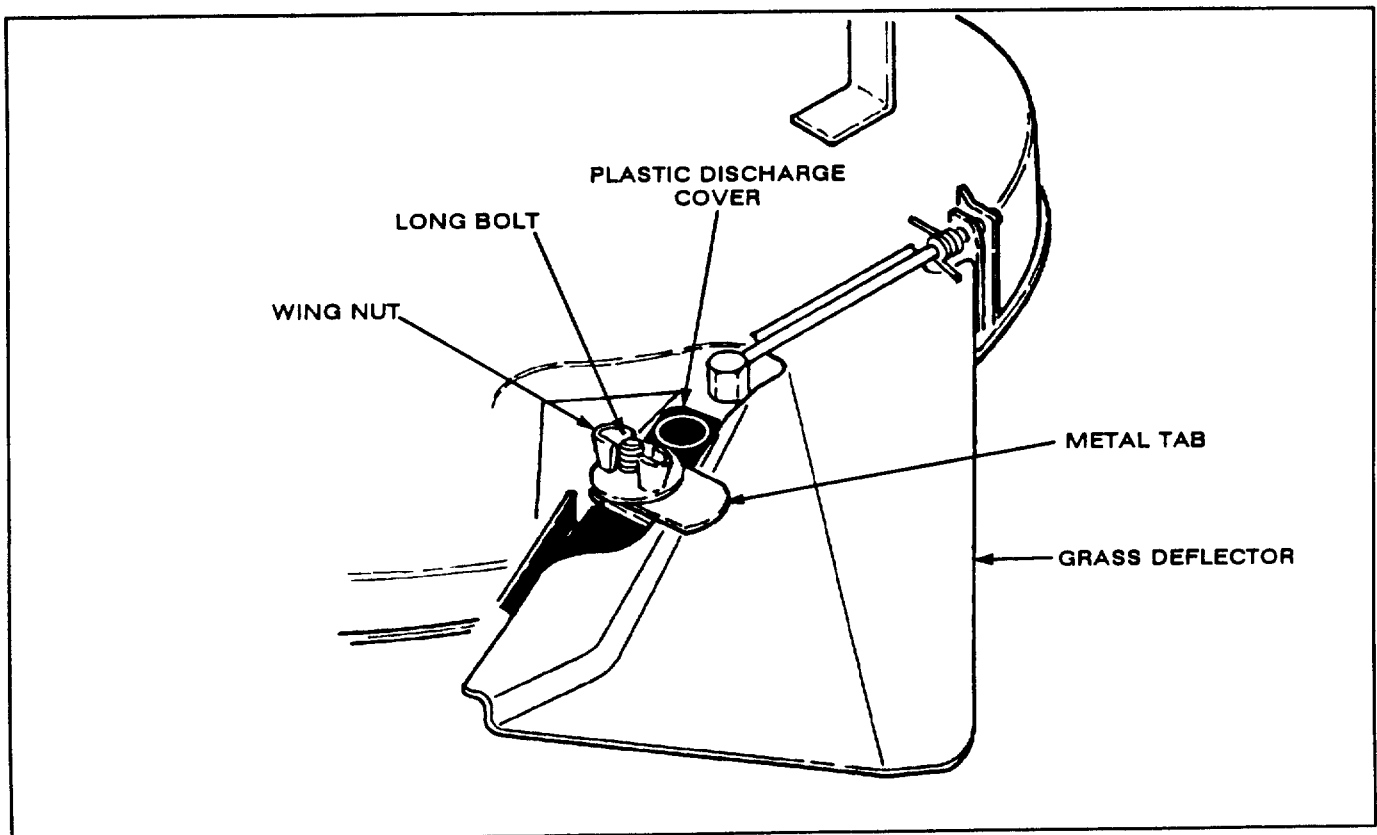


Figure 1