

LAWN-BOY.

GRASS SHIELD KIT

FOR SILVER SERIES SELF-PROPELLED MOWERS

PART NO. 93-7395

INSTALLATION INSTRUCTIONS

1. Tip mower on its right side.

Note: Determine left and right sides of mower by standing behind the handle in the operator's position.

2. Remove two (2) engine mounting screws and discard them (Fig. 1). On 4-cycle models, remove the belt guide (Fig. 2).

3. Slide grass shield into position shown in Figure 2. On 4-cycle models, reinstall the belt guide under the grass shield.

Note: Do not hook tabs on grass shield onto edge of deck opening.


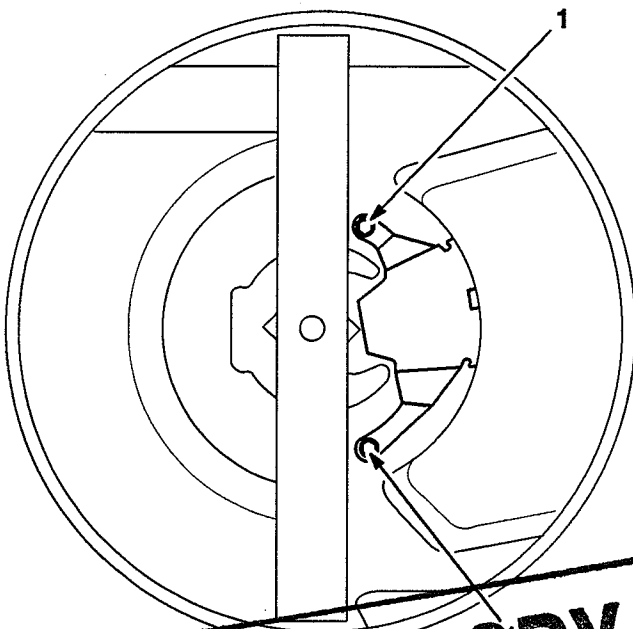


Figure 1

1. Engine mounting screw (2)

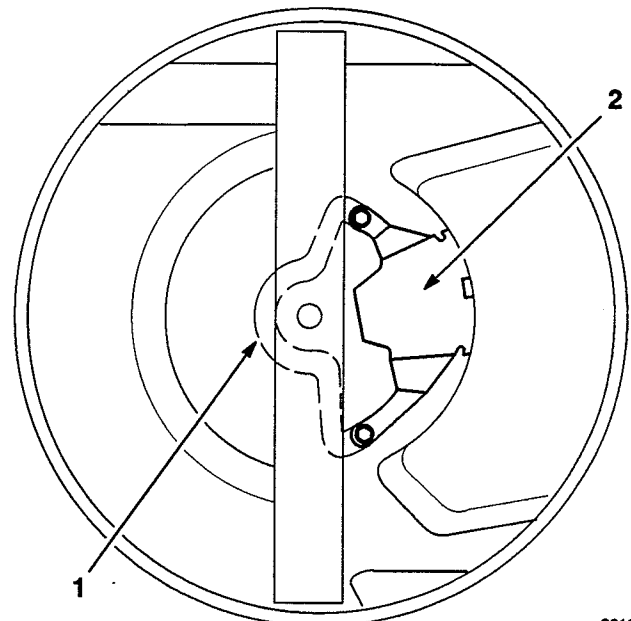

4-Cycle Model

Figure 2

1. Belt guide

2. Grass shield

4. Using two (2) screws provided in kit, install grass shield. Torque screws to 350-400 in-lbs.

ONLY COPY

NOT REMOVE

Instructions