



CE UPDATE KIT

264-6E YGT Model No. 72062

PART NO. 93-9250

INSTALLATION INSTRUCTIONS


Loose Parts

Note: Use the chart below to identify parts used for assembly.

DESCRIPTION	QTY.	USE
Thread adhesive (93-9273)	1	Install on throttle high idle screw

Adjust High Idle RPM

1. Loosen the lock nut (Fig. 1).
2. Apply several drops of thread adhesive to screw between lock nut and control plate (Fig. 1).
3. Start engine: refer to tractor Operator's Manual, and move throttle to fast position. Using an accurate tachometer, adjust engine high idle to 2800 RPM.
4. Tighten lock nut and check engine high idle RPM setting (Fig. 1).
5. Apply several additional drops of thread adhesive to screw threads above lock nut (Fig. 1).

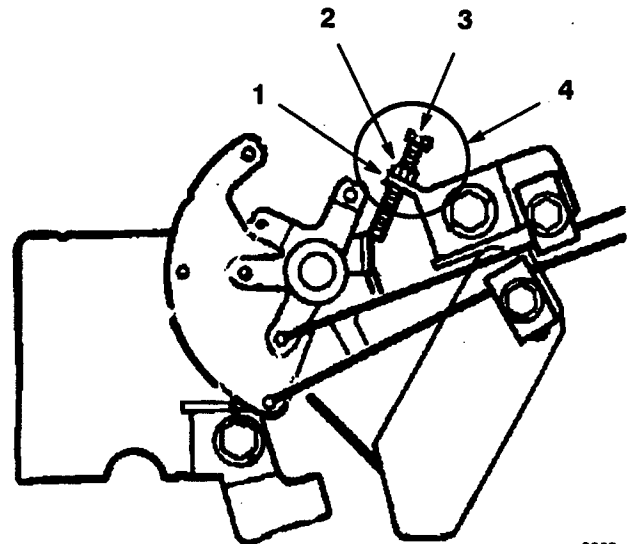

2082

Figure 1

- | | |
|------------------|--------------------------|
| 1. Control plate | 3. High idle adjustment |
| 2. Lock nut | 4. Apply thread adhesive |