

**CE UPDATE KIT****38" Mower YGT Model No. 78216****PART NO. 93-9253****INSTALLATION
INSTRUCTIONS****Loose Parts**

Note: Use the chart below to identify parts used for assembly.

DESCRIPTION	QTY.	USE
Discharge chute	1	Replace existing discharge chute

Installing Discharge Chute

1. Remove existing discharge chute by removing nut on long stand-off and sliding rod out (Fig. 1).
Note: Save hardware for installing new discharge chute.
2. Slide rod, non-rib end, through rear discharge chute bracket.
3. Place spring, with end wires down, between new discharge chute brackets, and slide rod through second discharge chute bracket.
4. Insert rod at front of discharge chute into short stand-off on deck. Secure rear end of rod to deck with long stand-off and nut (Fig. 1).

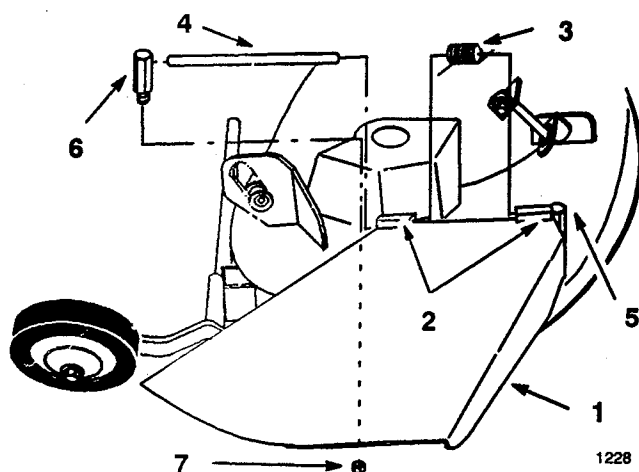


Figure 1

- | | |
|--------------------|--------------------|
| 1. Discharge chute | 5. Short stand-off |
| 2. Bracket | 6. Long stand-off |
| 3. Spring | 7. Nut |
| 4. Rod | |

IMPORTANT: Discharge chute must be spring loaded in the down position. Lift chute up to test that it snaps to the full down position.

DANGER

POTENTIAL HAZARD

- Without the grass deflector, discharge cover, or complete grass catcher assembly mounted in place, you and others are exposed to blade contact and thrown debris.

WHAT CAN HAPPEN

- Contact with rotating mower blade(s) and thrown debris will cause injury or death.

HOW TO AVOID THE HAZARD

- **NEVER** remove the grass deflector from the mower because the grass deflector routes material down toward the turf. If the grass deflector is ever damaged, replace it immediately.
- Never put your hands or feet under the mower.
- Never try to clear discharge area or mower blades unless you move the power take off (PTO) to "OFF" and rotate the ignition key to "OFF." Also remove the key and pull the wire off the spark plug(s).