



# 24V Battery Charger

Form No. 3371-424 Rev A

Model No. 88503

Model No. 88504

Model No. 88505

## Operator's Manual

### Charging the Battery Pack

1. Turn the battery upside down and line up the battery terminal with the slot in the charger (Figure 1 and Figure 2).

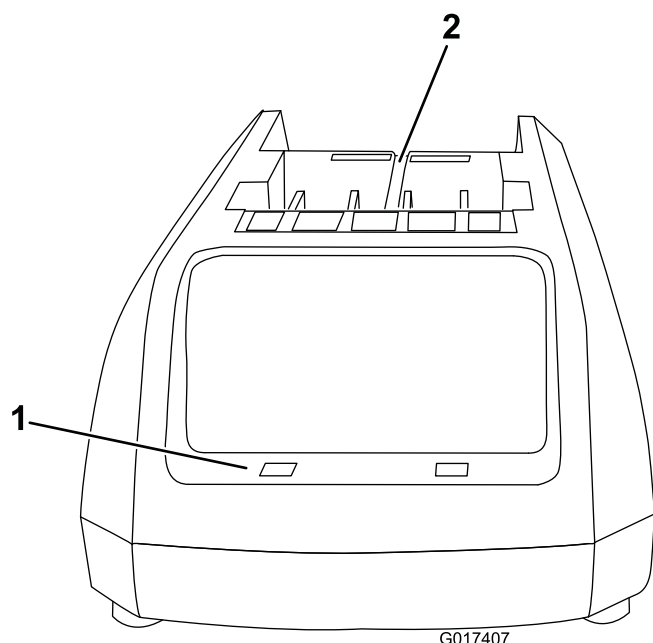


Figure 1

1. LED indicators
2. Insert battery here

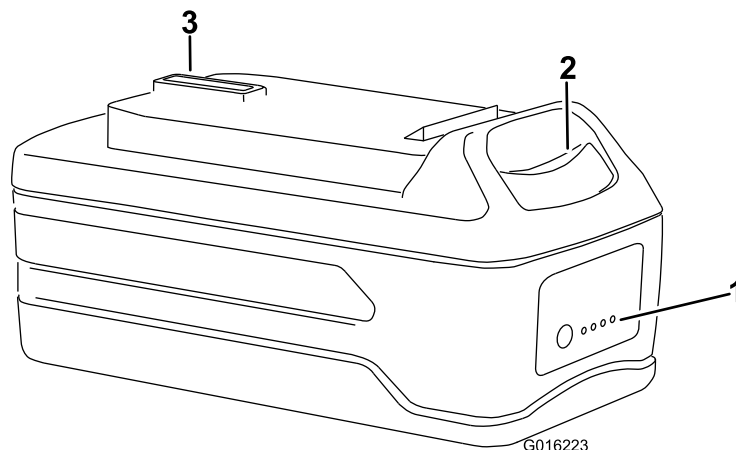



Figure 2

1. LED indicators (level of charge)
  2. Release button
  3. Battery terminal
2. Slide the battery into the charger until it clicks into place.
  3. To remove the battery, press down on the release button and slide the battery backwards out of the charger.
  4. Refer to the table below to interpret the LED indicators on the battery charger.

LED COLOR		
Left	Right	Indicates:
Red	Red	Battery is charging
Red	Green	Fully charged
Red	Orange	Battery is too warm: Remove for approximately 30 minutes
Red	Green	No battery present
Red (blinking)	Red (blinking)	Defective battery

# Inserting the Battery into the Trimmer

1. Align the tongue of the battery pack with the cavity in the handle housing (Figure 3).

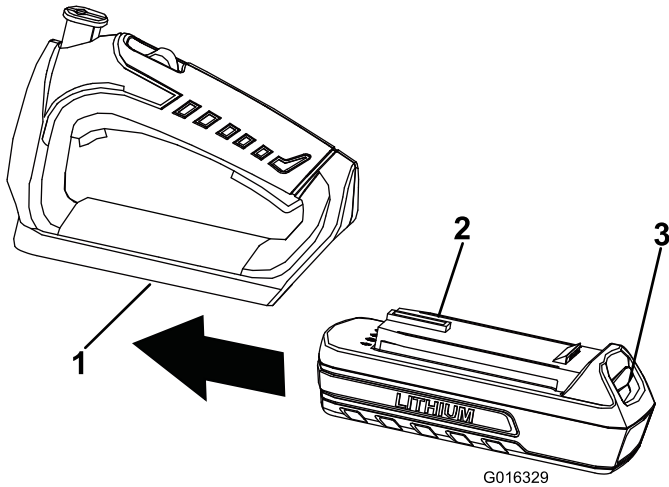

**Figure 3**

Hedge trimmer handle shown

- |           |          |
|-----------|----------|
| 1. Cavity | 3. Latch |
| 2. Tongue |          |

2. Grasp the trimmer handle.
3. Push the battery pack into the handle until the latch locks into place.

**Important:** The battery pack is not fully charged when it is purchased. Before using the trimmer for the first time, place the battery pack in the charger and charge it until the LED indicators turn green. Make sure to read all safety precautions. With regular use, it will need shorter charging time. If storing for a prolonged period of time, remove the battery. When ready to use again, charge the battery pack until the LED indicators turn green.

## Battery Pack Preparation For Recycling

### **⚠ WARNING**

Upon removal, cover the battery pack's terminals with heavy-duty adhesive tape. Do not attempt to destroy or disassemble the battery pack or remove any of its components. Lithium-ion batteries must be recycled or disposed of properly at the nearest battery recycling facility.