


# Z MASTER® Z500 PRO SERIES

The original, heavy-duty TURBO FORCE® zero-turn rider comes packed with superior power and industry-leading performance.



**33% thicker** | **75% stronger**  
than ordinary 10-gauge commercial steel used in 7/10 decks

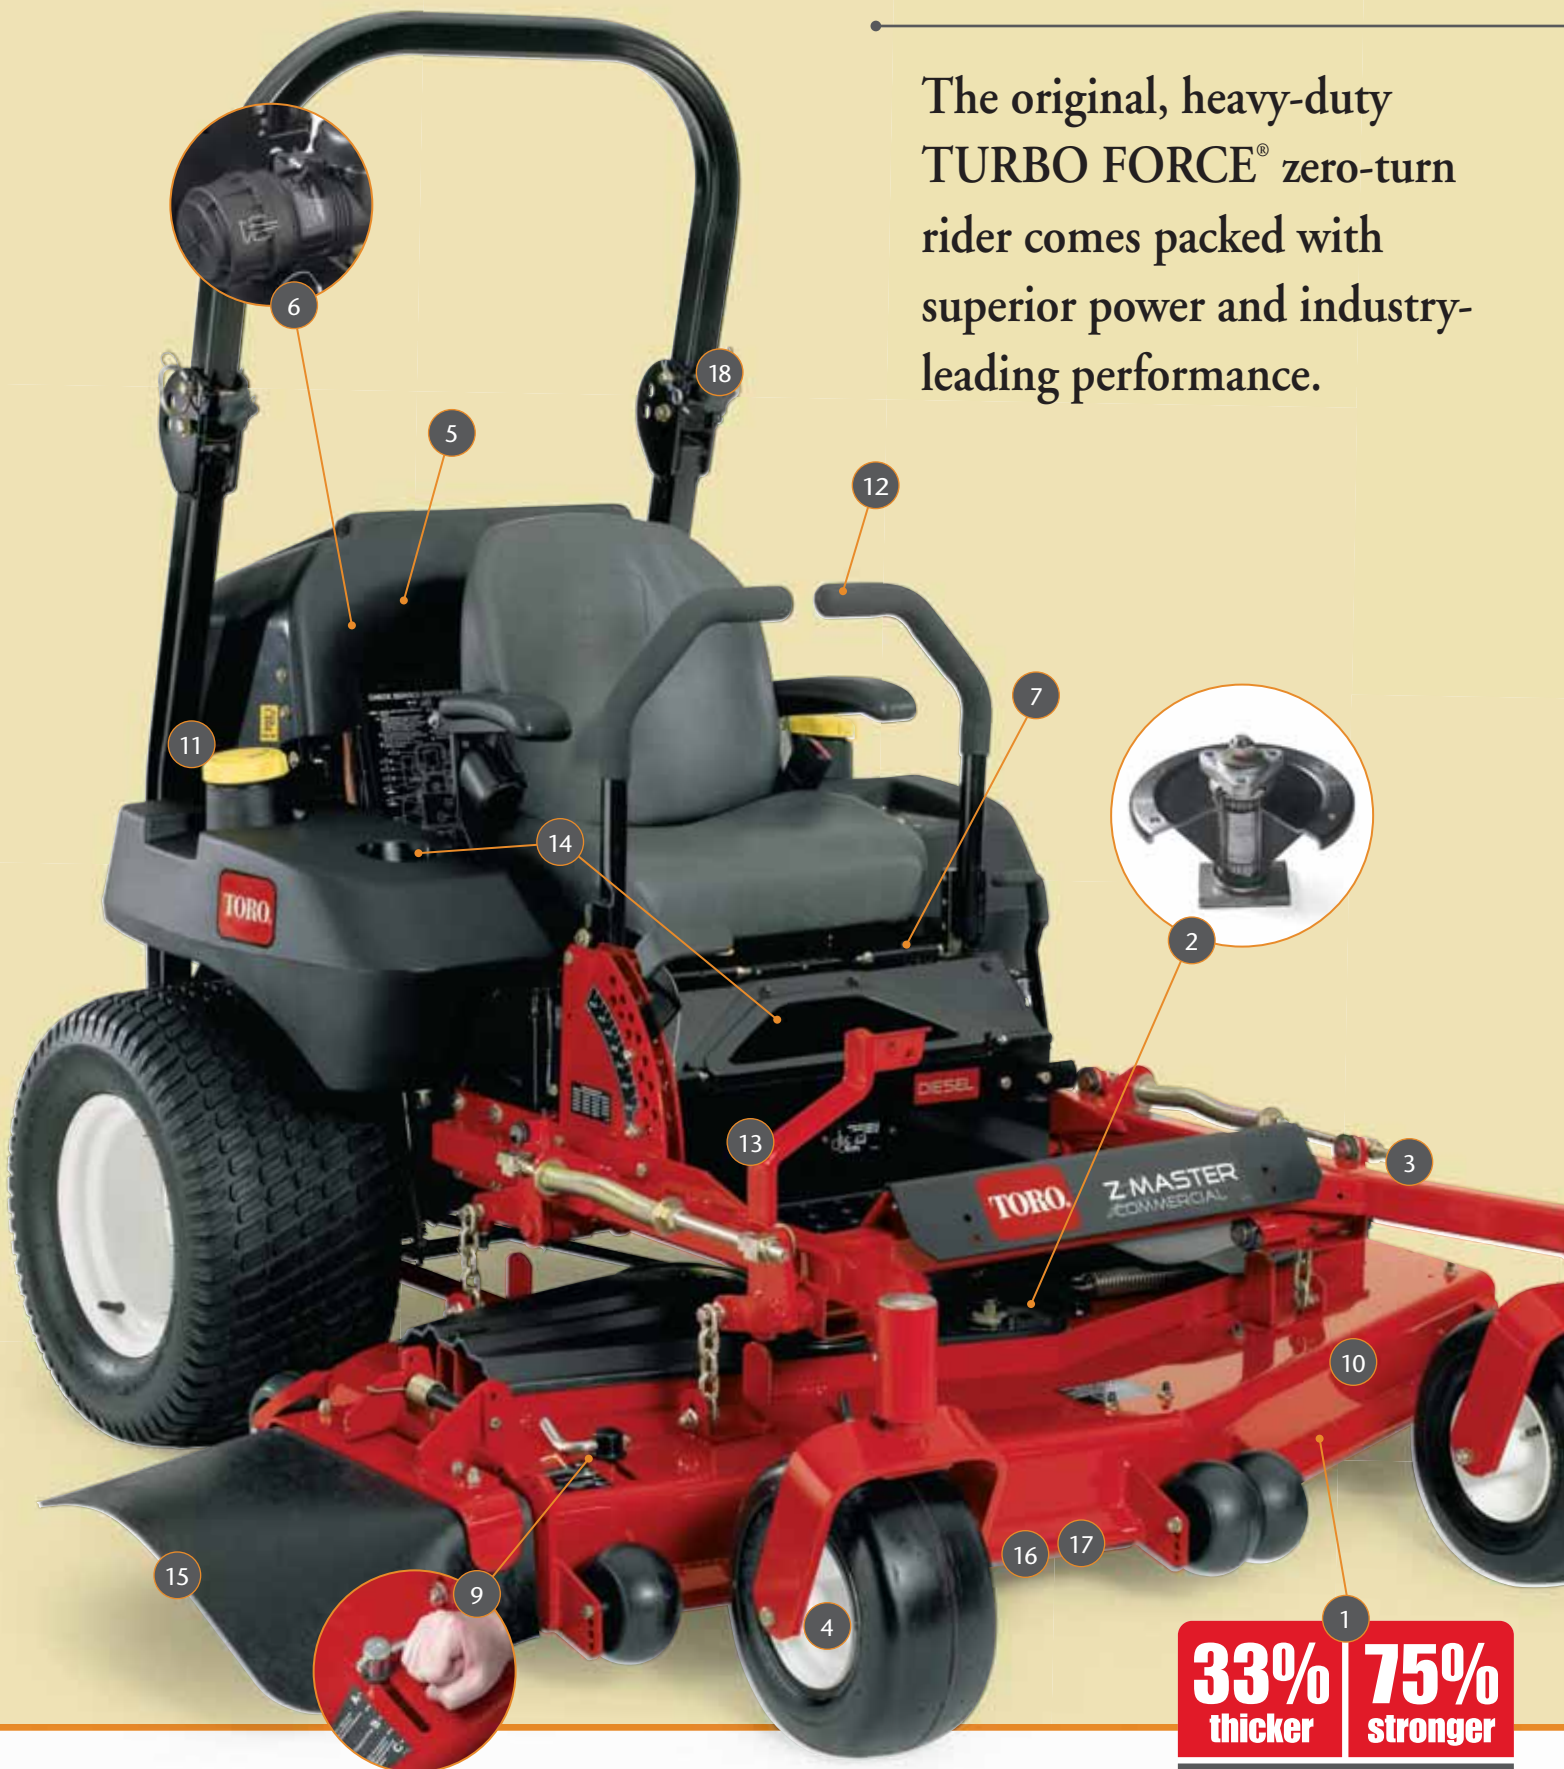

**NEW FOR 2008**

All diesel-powered Toro Z Master mowers are approved to utilize up to 20% biodiesel (B20) fuel blends.

**Z500 SERIES MODELS**

- 27 hp Kohler®, gas
- Fabricated, 7-gauge steel deck
- 52" and 60" cutting widths
- 10 cc pumps

**Z550 SERIES MODELS**

- 28 hp Kawasaki® and 27 hp Kohler, gas
- TURBO FORCE® 7-gauge steel deck
- 52", 60" and 72" cutting widths
- 12 cc pumps

**Z580 SERIES MODELS**

- 29 hp Kawasaki digital fuel injection, gas
- Liquid-cooled
- TURBO FORCE 7-gauge steel deck
- 60" and 72" cutting widths
- 16 cc pumps

**Z580-D SERIES MODELS**

- 25 hp Kubota, diesel, biodiesel-ready
- Liquid-cooled
- TURBO FORCE 7-gauge steel deck
- 52", 60" and 72" cutting widths
- 16 cc pumps

**Z590-D SERIES MODELS**

- 27 hp Daihatsu®, diesel, biodiesel ready
- Liquid-cooled
- TURBO FORCE 7-gauge steel deck
- 60" and 72" cutting widths
- 21 cc pumps

**DURABILITY**

- 1 Rugged, 7-gauge high-strength steel deck construction with damage-resistant bull-nose bumper  
*(bull-nose on TURBO FORCE® models only)*
- 2 Robust 9-3/8" cast iron spindle housings and solid 1" steel spindle shafts with tapered roller bearings  
*(tapered roller bearings on TURBO FORCE models only)*
- 3 Extra strong 2" x 2" x 3/16" tubular steel carrier frame
- 4 Heavy-duty caster wheel assemblies with tapered roller bearings

**RELIABILITY**

- 5 Commercial-grade twin cylinder engines (diesel: 3-cylinder)
- 6 Heavy-duty canister air filtration system
- 7 Proven, commercial-grade hydrostatic drive systems
- 8 Semi-pneumatic flat-free caster tires  
*(TURBO FORCE models only)*

**PRODUCTIVITY**

- 9 Patented TURBO FORCE adjustable discharge baffle  
*(TURBO FORCE models only)*
- 10 High-capacity, 5-1/2" deep deck design
- 11 Twin tanks, 12-gallon fuel capacity
- 12 Comfortable, extra-large, 1-5/8" diameter adjustable control levers

- 13 Convenient foot pedal deck lift  
*(optional accessory on Z500 models)*
- 14 Easy-access cup holder and storage compartment

**AFTER-CUT APPEARANCE**

- 15 Maximum dispersion rubber discharge chute
- 16 Super-fast blade tip speed; 18,500+ ft/min
- 17 High-lift, flex-resistant 1/4"-thick, heat-treated steel blades

**SAFETY**

- 18 Three-position, folding ROPS (OSHA approved)
- 19 Tested to ANSI B71.4 safety standards

