
©2017—The Toro® Company, 8111 Lyndale Avenue South, Bloomington, MN 55420

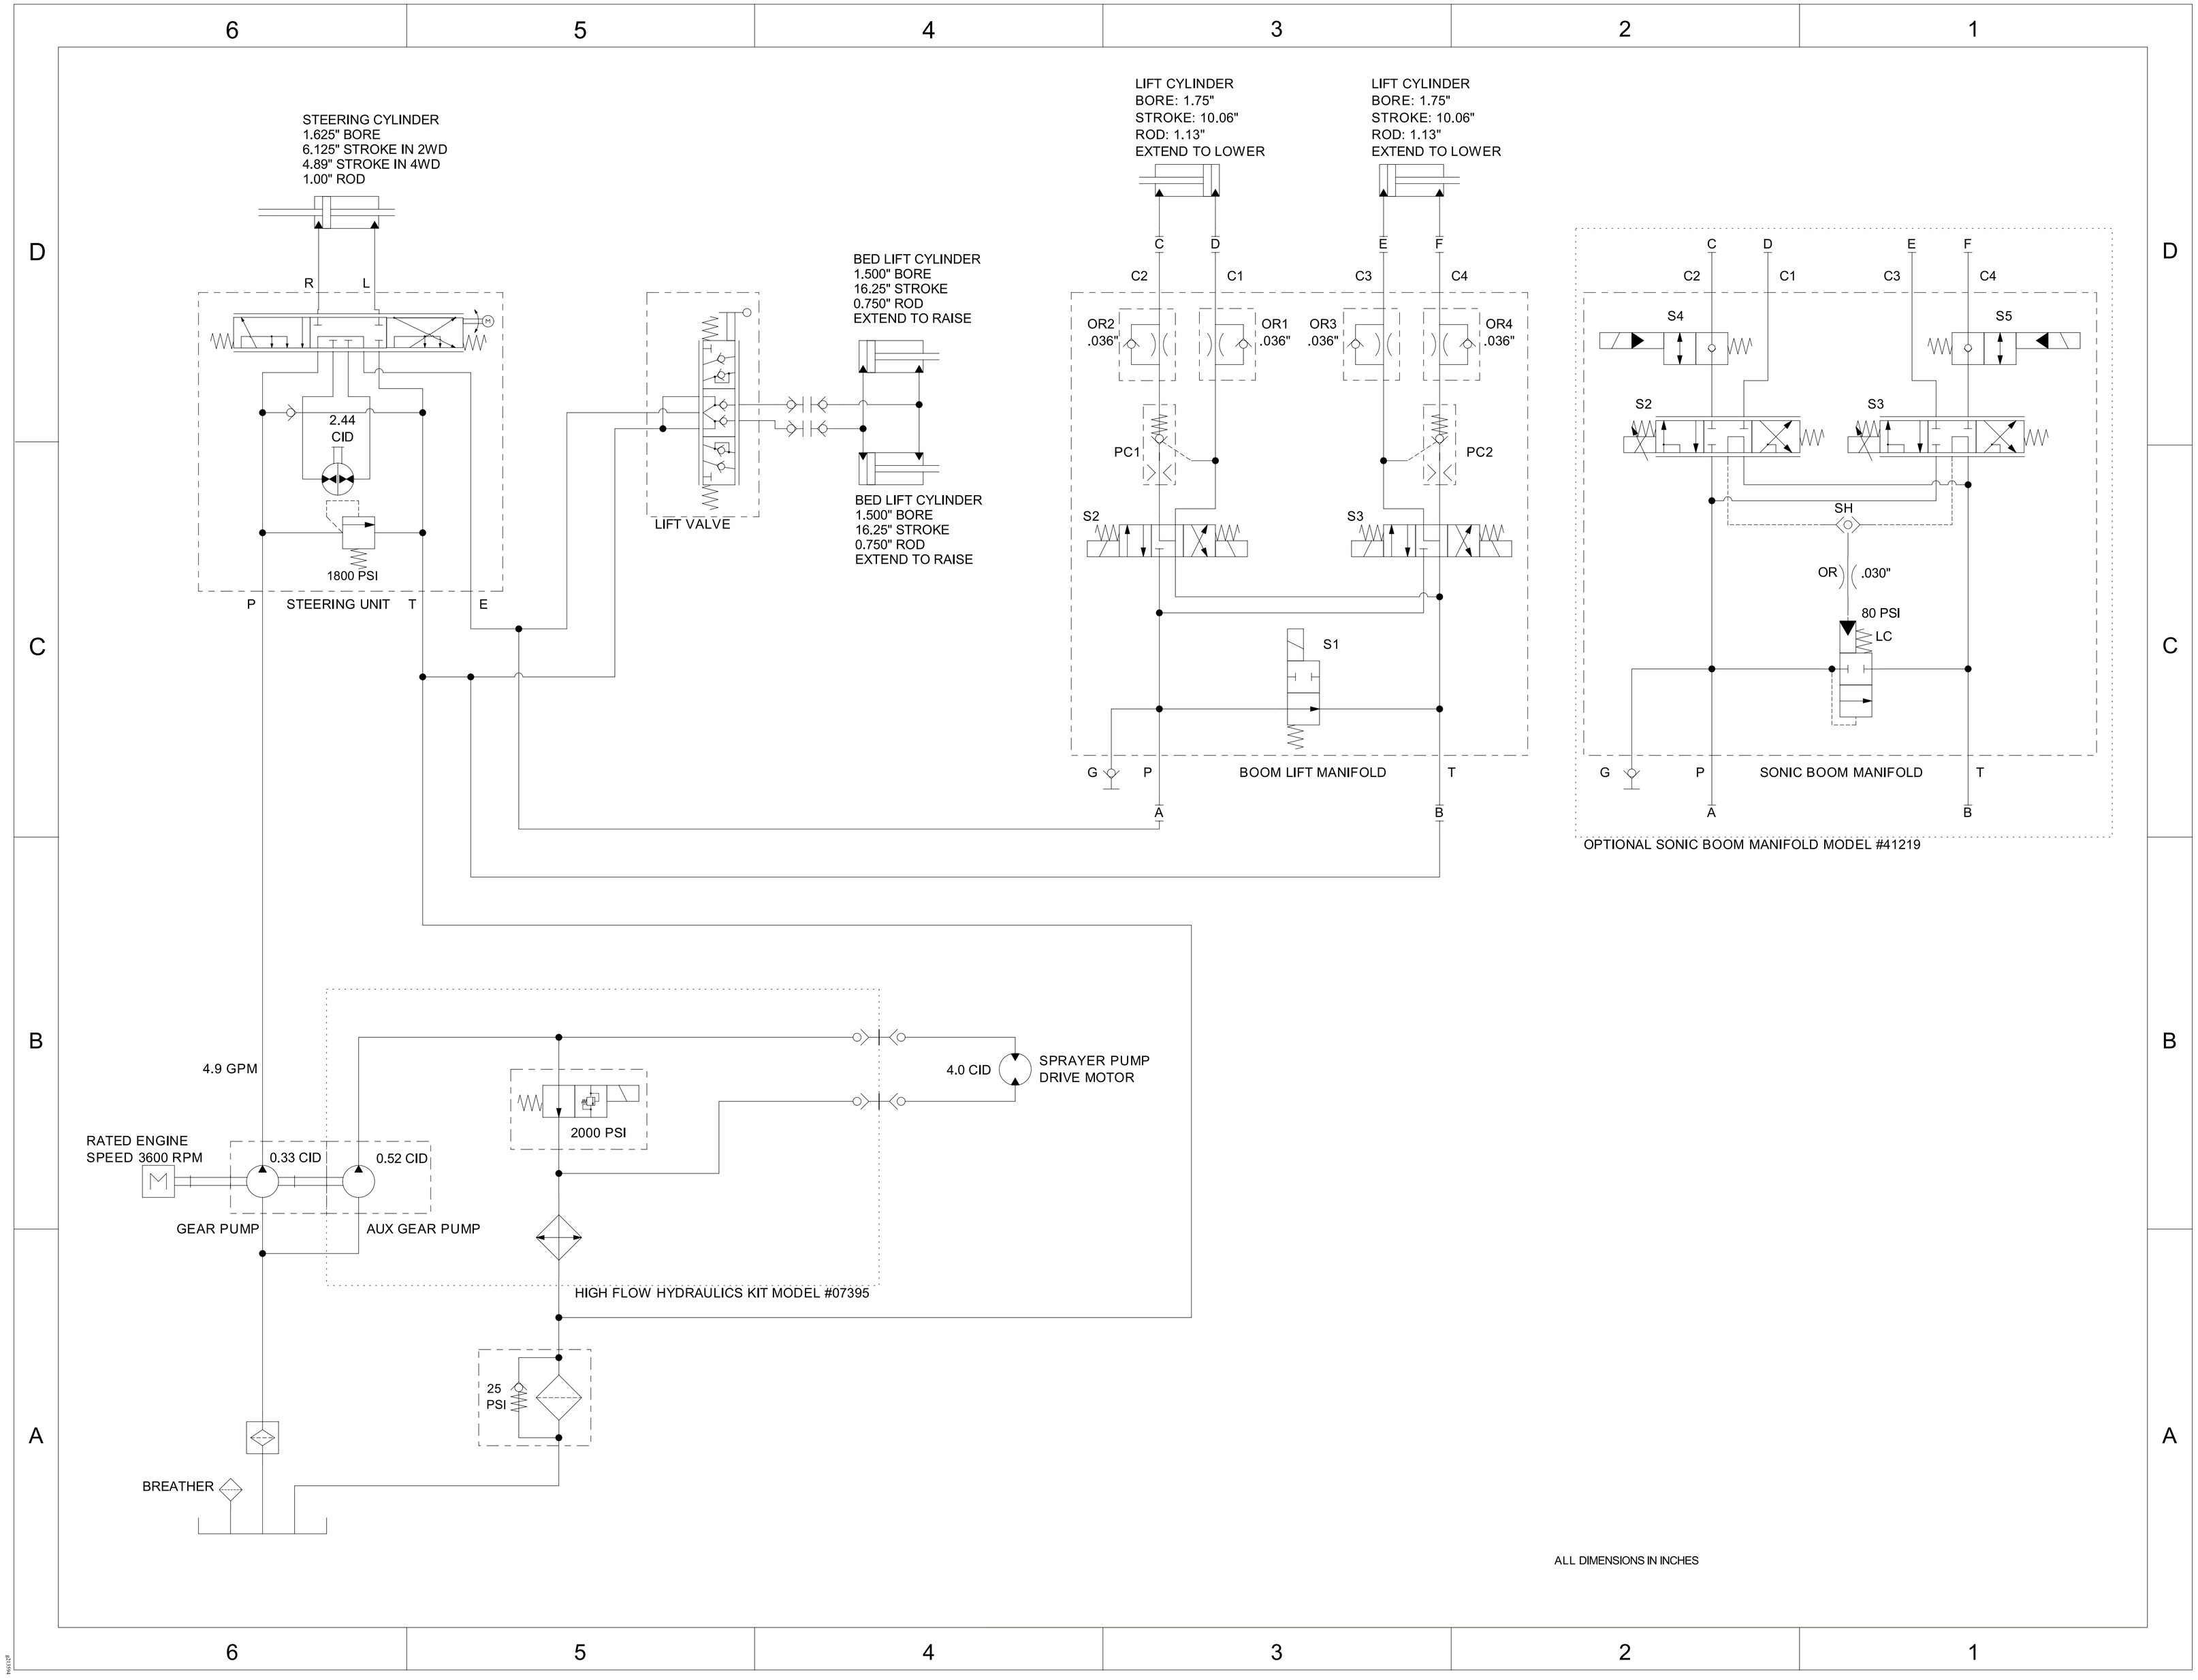

Form No. 3415-670 Rev A

©2017—The Toro® Company, 8111 Lyndale Avenue South, Bloomington, MN 55420

STEERING CYLINDER
1.625" BORE
6.125" STROKE IN 2WD
4.89" STROKE IN 4WD
1.00" ROD

R L

2.44 CID

1800 PSI

P STEERING UNIT T E

LIFT VALVE

BED LIFT CYLINDERS
1.500" BORE
16.25" STROKE
0.750" ROD
EXTEND TO RAISE

BED LIFT CYLINDERS
1.500" BORE
16.25" STROKE
0.750" ROD
EXTEND TO RAISE

LIFT CYLINDER
BORE: 1.75"
STROKE: 10.06"
ROD: 1.13"
EXTEND TO LOWER

LIFT CYLINDER
BORE: 1.75"
STROKE: 10.06"
ROD: 1.13"
EXTEND TO LOWER

C D E F
C2 C1 C3 C4
OR2 .036" OR1 .036" OR3 .036" OR4 .036"
PC1 PC2
S2 S3
S1
G P BOOM LIFT MANIFOLD T
A B

C D E F
C2 C1 C3 C4
S4 S5
S2 S3
SH
OR .030"
80 PSI
LC
G P SONIC BOOM MANIFOLD T
A B

OPTIONAL SONIC BOOM MANIFOLD MODEL #41219

4.9 GPM

RATED ENGINE
SPEED 3600 RPM

0.33 CID
GEAR PUMP

25 PSI

BREATHER

TRANSAXLE

ALL DIMENSIONS IN INCHES