Form No. 3418-828 Rev A

TORO®

Count on it.

Operator's Manual

# Groundsmaster® 7210 Series Traction Unit

**Model No. 30695—Serial No. 401390001 and Up**

Register at www.Toro.com.
Original Instructions (EN)

*3418-828* A

**⚠ WARNING**

**CALIFORNIA**
**Proposition 65 Warning**

**This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.**

**Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.**

It is a violation of California Public Resource Code Section 4442 or 4443 to use or operate the engine on any forest-covered, brush-covered, or grass-covered land unless the engine is equipped with a spark arrester, as defined in Section 4442, maintained in effective working order or the engine is constructed, equipped, and maintained for the prevention of fire.

The enclosed engine owner's manual is supplied for information regarding the US Environmental Protection Agency (EPA) and the California Emission Control Regulation of emission systems, maintenance, and warranty. Replacements may be ordered through the engine manufacturer.


# Introduction

This machine is a ride-on, rotary-blade lawn mower intended to be used by professional, hired operators in commercial applications. It is primarily designed for cutting grass on well-maintained lawns in parks, sports fields, and on commercial grounds.

***Important:*** **To maximize the safety, performance, and proper operation of this machine, carefully read and fully understand the contents of this *Operator's Manual*. Failing to follow these operating instructions or to receive proper training may result in injury. For more information on safe operating practices, including safety tips and training materials, go to www.Toro.com.**

Whenever you need service, genuine Toro parts, or additional information, contact an Authorized Service Dealer or Toro Customer Service and have the model and serial numbers of your product ready. Figure 1 identifies the location of the model and serial numbers on the product. Write the numbers in the space provided.

***Important:*** **With your mobile device, you can scan the QR code on the serial number decal (if equipped) to access warranty, parts, and other product information.**

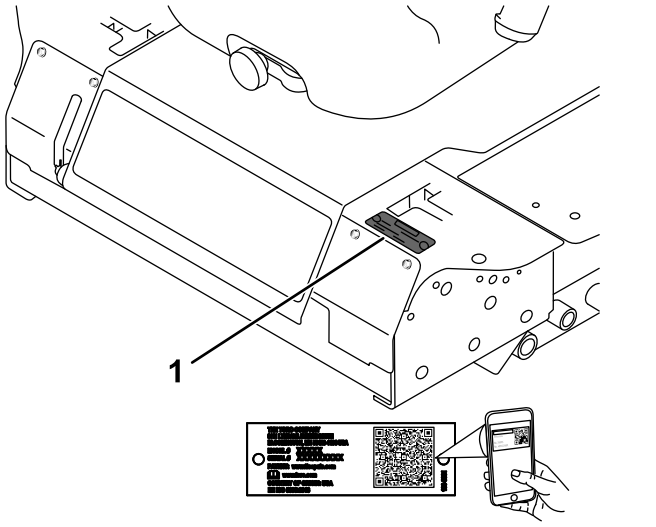


g241316

**Figure 1**

1. Model and serial number location

**Model No.** _____

**Serial No.** _____

This manual identifies potential hazards and has safety messages identified by the safety-alert symbol (Figure 2), which signals a hazard that may cause serious injury or death if you do not follow the recommended precautions.



g000502

**Figure 2**

1. Safety-alert symbol

This manual also uses 2 words to highlight information. **Important** calls attention to special mechanical information and **Note** emphasizes general information worthy of special attention.

© 2018—The Toro® Company
8111 Lyndale Avenue South
Bloomington, MN 55420



Contact us at www.Toro.com.
Printed in the USA
All Rights Reserved

# Contents


Safety ..... 4
General Safety ..... 4
Engine-Emission Certification ..... 4
Safety and Instructional Decals ..... 4
Setup ..... 7
1 Raising the Roll Bar ..... 7
2 Installing the Mower Deck ..... 7
3 Adjusting the Left, Front Caster Wheel ..... 7
4 Checking the Tire Pressure ..... 7
5 Checking the Fluid Levels ..... 7
Product Overview ..... 8
Controls ..... 8
Specifications ..... 13
Attachments/Accessories ..... 14
Before Operation ..... 14
Before Operation Safety ..... 14
Adding Fuel ..... 15
Adjusting the Roll Bar ..... 16
Adjusting the Height of Cut ..... 18
Using the Safety-Interlock System ..... 18
Positioning the Seat ..... 19
Changing the Seat Suspension ..... 20
Unlatching the Seat ..... 20
During Operation ..... 20
During Operation Safety ..... 20
Operating the Parking Brake ..... 22
Starting the Engine ..... 22
Driving the Machine ..... 23
Shutting Off the Engine ..... 24
Operating the Mower ..... 25
Cutting Grass with the Machine ..... 26
Diesel Particulate Filter Regeneration ..... 26
Operating Tips ..... 39
After Operation ..... 39
After Operation Safety ..... 39
Pushing the Machine ..... 39
Transporting the Machine ..... 40
Loading the Machine ..... 41
Maintenance ..... 42
Recommended Maintenance Schedule(s) ..... 42
Daily Maintenance Checklist ..... 43
Pre-Maintenance Procedures ..... 44
Maintenance Safety ..... 44
Lubrication ..... 44
Greasing the Bearings and Bushings ..... 44
Servicing the Mower-Deck Gearbox Lubricant ..... 44
Engine Maintenance ..... 46
Engine Safety ..... 46
Checking the Air Cleaner ..... 46
Servicing the Air Cleaner ..... 46
Servicing the Engine Oil ..... 47
Servicing the Diesel-Oxidation Catalyst (DOC) and the Soot Filter ..... 48
Fuel System Maintenance ..... 49
Servicing the Engine Fuel Filter ..... 49
Servicing the Water Separator ..... 49
Cleaning the Fuel Tank ..... 50
Checking the Fuel Lines and Connections ..... 50
Electrical System Maintenance ..... 50
Electrical System Safety ..... 50
Servicing the Battery ..... 50
Storing the Battery ..... 51
Checking the Fuses ..... 51
Drive System Maintenance ..... 52
Checking the Tire Pressure ..... 52
Replacing the Caster Wheels and Bearings ..... 52
Cooling System Maintenance ..... 53
Cooling System Safety ..... 53
Checking the Cooling System ..... 53
Cleaning the Radiator ..... 53
Brake Maintenance ..... 54
Adjusting the Parking-Brake Interlock Switch ..... 54
Belt Maintenance ..... 55
Checking the Alternator-Belt Tension ..... 55
Controls System Maintenance ..... 55
Adjusting the Control-Lever Neutral-Interlock Switch ..... 55
Adjusting the Control-Lever Neutral Return ..... 56
Adjusting the Traction Drive for Neutral ..... 57
Adjusting the Maximum Ground Speed ..... 58
Adjusting the Tracking ..... 59
Hydraulic System Maintenance ..... 60
Hydraulic System Safety ..... 60
Checking the Hydraulic System ..... 60
Changing the Hydraulic Fluid and Filter ..... 61
Cleaning ..... 62
Cleaning Under the Mower ..... 62
Waste Disposal ..... 62
Storage ..... 62
Machine ..... 62
Engine ..... 63

# Safety

This machine has been designed in accordance with ANSI B71.4-2017.

## General Safety

This product is capable of amputating hands and feet and of throwing objects. Always follow all safety instructions to avoid serious personal injury.

Using this product for purposes other than its intended use could prove dangerous to you and bystanders.

- Read and understand the contents of this *Operator's Manual* before starting the engine.
- Use your full attention while operating the machine. Do not engage in any activity that causes distractions; otherwise, injury or property damage may occur.
- Do not put your hands or feet near moving components of the machine.
- Do not operate the machine without all guards and other safety protective devices in place and working on the machine.
- Keep clear of any discharge opening. Keep bystanders and pets a safe distance away from the machine.
- Keep children out of the operating area. Never allow children to operate the machine.
- Stop the machine, shut off the engine, remove the key, and wait for all moving parts to stop before servicing, fueling, or unclogging the machine.

Improperly using or maintaining this machine can result in injury. To reduce the potential for injury, comply with these safety instructions and always pay attention to the safety-alert symbol, which means Caution, Warning, or Danger—personal safety instruction. Failure to comply with these instructions may result in personal injury or death.

You can find additional safety information where needed throughout this *Operator's Manual*.

## Engine-Emission Certification

The engine in this machine is EPA Tier 4 Final and EU Stage 3b emissions compliant.

## Safety and Instructional Decals

Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or missing.




decalbatterysymbols

**Battery Symbols**

Some or all of these symbols are on your battery.

1. Explosion hazard
2. No fire, open flame, or smoking.
3. Caustic liquid/chemical burn hazard
4. Wear eye protection
5. Read the *Operator's Manual.*
6. Keep bystanders a safe distance from the battery.
7. Wear eye protection; explosive gases can cause blindness and other injuries.
8. Battery acid can cause blindness or severe burns.
9. Flush eyes immediately with water and get medical help fast.
10. Contains lead; do not discard.




decal93-6687

**93-6687**


1. Do not step here.




decal93-6697

**93-6697**


1. Read the *Operator's Manual*.
2. Add SAE 80w-90 (API GL-5) oil every 50 hours.

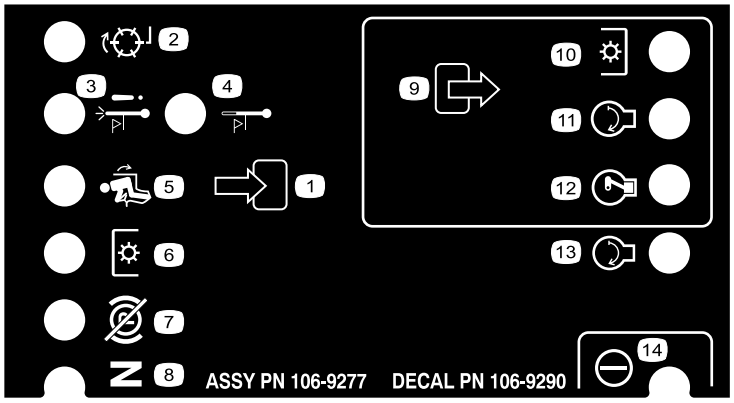


decal106-9290

**106-9290**


1. Inputs
2. Not active
3. High temperature shutdown
4. High temperature warning
5. In seat
6. Power takeoff (PTO)
7. Parking brake off
8. Neutral
9. Outputs
10. Power takeoff (PTO)
11. Start
12. Energize to run (ETR)
13. Start
14. Power

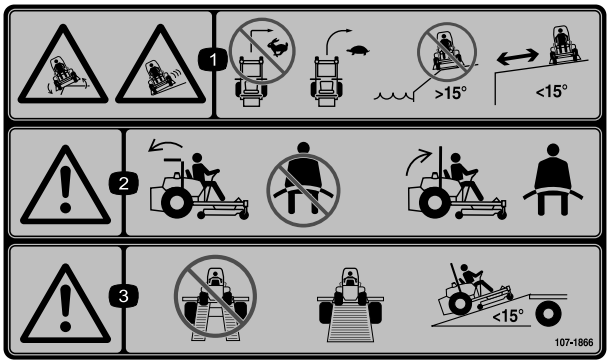


decal107-1866

**107-1866**


1. Tipping hazard and sliding or loss of control hazard, drop-offs—do not turn sharply while traveling fast, instead, slow down and turn gradually; do not operate the machine near drop-offs, slopes greater than 15 degrees, or water; keep a safe distance from drop-offs.
2. Warning—if the roll bar is lowered, do not wear the seat belt; if the roll bar is raised, wear the seat belt.
3. Warning—do not use split ramps; use a full ramps when transporting machine; only use ramps with inclines less than 15 degrees.

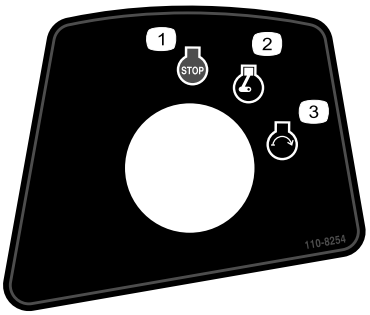


decal110-8254

**110-8254**

1. Engine–Stop
2. Engine—Run
3. Engine—Start

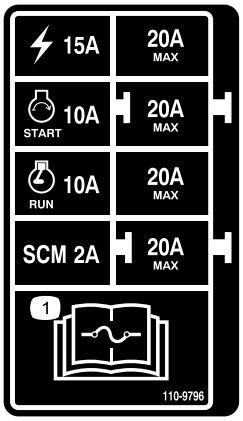


decal110-9796

**110-9796**


1. Read the *Operator's Manual* for information on fuses.




decal117-3276

**117-3276**


1. Engine coolant under pressure
2. Explosion hazard—read the *Operator's Manual*.
3. Warning—do not touch the hot surface.
4. Warning—read the *Operator's Manual*.

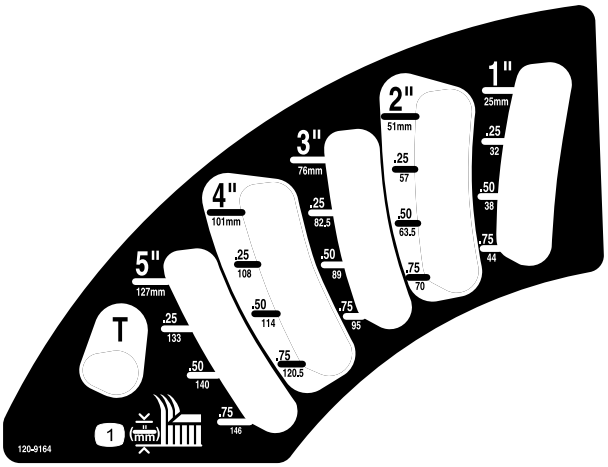


decal120-9164

**120–9164**


1. Height-of-cut settings

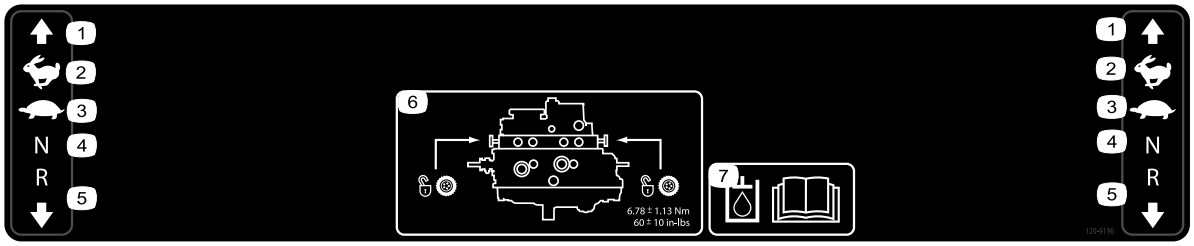


decal120-9196

**120-9196**

1. Forward
2. Fast
3. Slow
4. Neutral
5. Reverse
6. Tow valve location; torque the tow valves to 5.65 to 7.91 N·m (50 to 70 in-lb).
7. Read the *Operator's Manual* for more information on the hydraulic fluid.

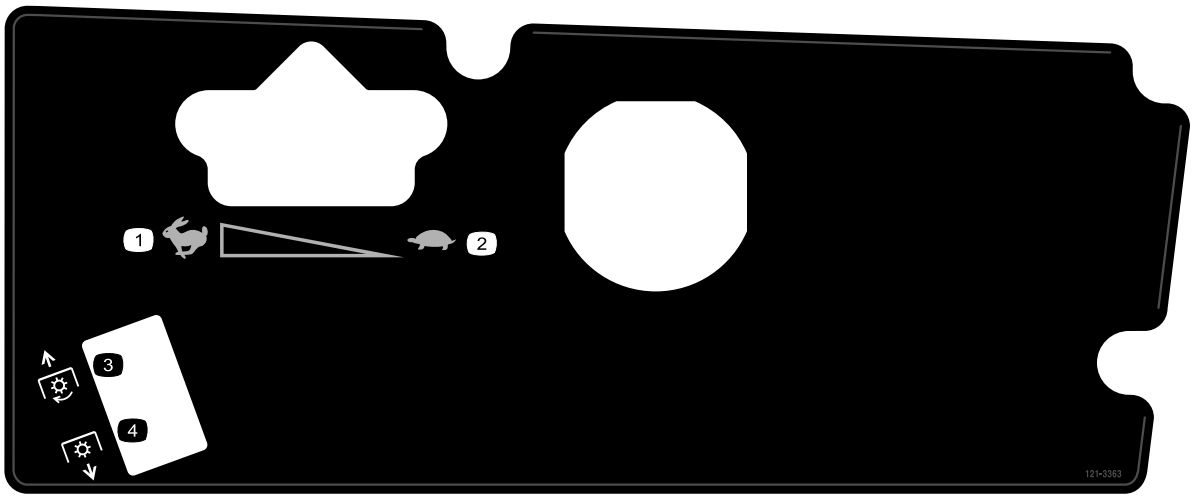


decal121-3363

**121–3363**

1. Fast
2. Slow
3. Engage PTO
4. Disengage PTO

**⚠WARNING:** This product can expose you to chemicals including diesel engine exhaust, which is known to the State of California to cause cancer, and carbon monoxide, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov. For more information, please visit www.toro.com/CAProp65.

**CALIFORNIA SPARK ARRESTER WARNING**

Operation of this equipment may create sparks that can start fires around dry vegetation. A spark arrester may be required. The operator should contact local fire agencies for laws or regulations relating to fire prevention requirements.

133-5618

decal133-5618

**133-5618**

# Setup

## Loose Parts

Use the chart below to verify that all parts have been shipped.

| Procedure | Description | Qty. | Use |
|---|---|---|---|
| 1 | No parts required | – | Raise the ROPS. |
| 2 | Mower deck Installation Instructions | 1 | Install the mower deck. |
| 3 | No parts required | – | Adjust the left, front caster wheel. |
| 4 | No parts required | – | Check the tire pressure. |
| 5 | No parts required | – | Check the hydraulic fluid, engine oil, and coolant levels. |

1

## Raising the Roll Bar

**No Parts Required**

### Procedure

Raise the roll bar; refer to Raising the Roll Bar (page 17).

2

## Installing the Mower Deck

**Parts needed for this procedure:**

| | |
|---|---|
| 1 | Mower deck *Installation Instructions* |

### Procedure

Install the mower deck using the *Installation Instructions* for that mower deck.

3

## Adjusting the Left, Front Caster Wheel

**No Parts Required**

### Procedure

Adjust the left, front caster wheel to the outside position for 72-inch mower decks and to the inside position for 60-inch and 62-inch mower decks.

4

## Checking the Tire Pressure

**No Parts Required**

### Procedure

The tires are overinflated for shipping. Release some air to reduce the pressure. The correct air pressure is 103 kPa (15 psi) in the rear tires and 172 kPa (25 psi) in the caster wheels.

# 5


# Checking the Fluid Levels

**No Parts Required**

## Procedure

1. Check the hydraulic-fluid level before starting the engine, refer to Hydraulic System Maintenance (page 60).
2. Check the engine-oil level before starting the engine, refer to Checking the Engine-Oil Level (page 47).
3. Check the cooling system before starting the engine; refer to Checking the Cooling System (page 53).


# Product Overview

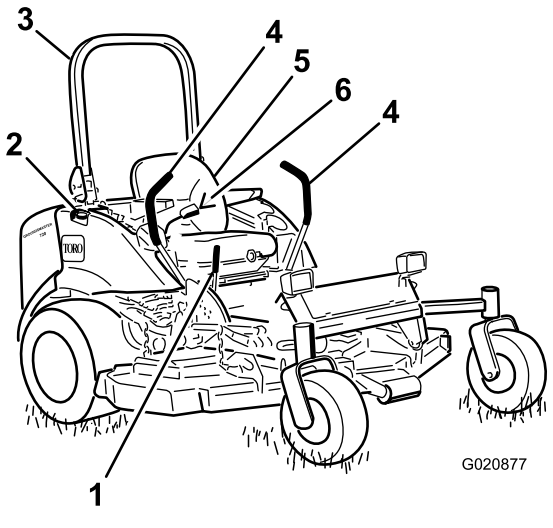


g020877

**Figure 3**

1. Parking brake lever
2. Fuel cap (both sides)
3. Roll bar
4. Motion control lever
5. Seat
6. Seat belt

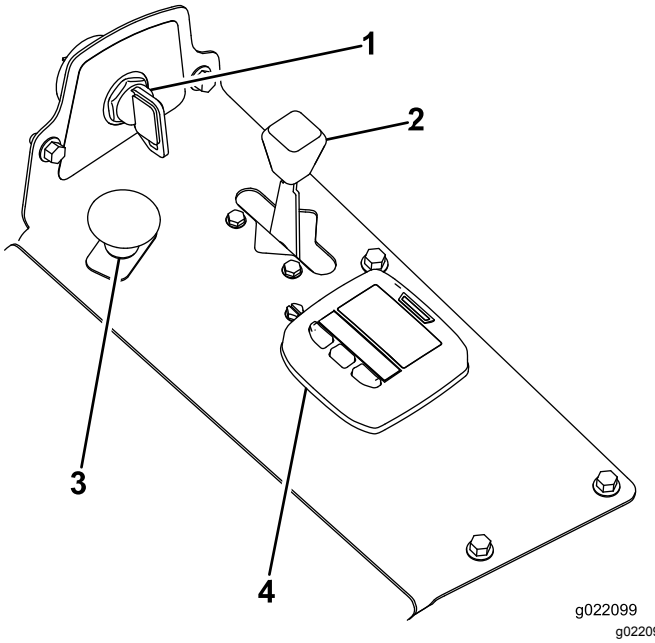


g022099

g022099

**Figure 4**

1. Ignition switch
2. Throttle lever
3. Power-takeoff (PTO) Switch
4. InfoCenter

# Controls

Become familiar with all the controls before you start the engine and operate the machine (Figure 3 and Figure 4).

## Motion-Control Levers

The motion-control levers control the forward and rearward motions as well as the turning of the machine. Refer to Driving the Machine (page 23).

## Parking-Brake Lever

Whenever you shut off the engine, engage the parking brake to prevent accidental movement of the machine. To engage the parking brake, pull the parking-brake lever rearward and up (Figure 5). To release the parking brake, push the parking-brake lever forward and down.

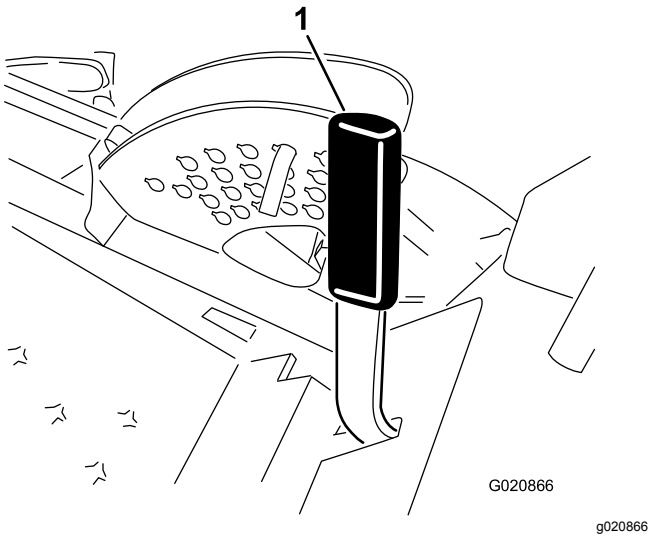



**Figure 5**

1. Parking-brake lever

## Ignition Switch

The ignition switch has 3 positions: OFF, ON/PREHEAT, and START.

## Throttle Lever

The throttle lever controls the speed of the engine, the speed of the blades, and, in conjunction with motion-control levers, the ground speed of the machine. Moving the throttle lever forward toward the FAST position increases the engine speed. Moving it rearward toward the SLOW position decreases the engine speed. Always run the machine with the throttle in the FAST position when cutting grass.

## Power-Takeoff (PTO) Switch

The power-takeoff (PTO) switch starts and stops the mower blades.

## Using the InfoCenter LCD Display

The InfoCenter LCD display shows information about your machine such as the operating status, various diagnostics and other information about the machine (Figure 6). There is a splash screen and main information screen of the InfoCenter. You can switch between the splash screen and main information screen, at any time, by pressing any of the InfoCenter buttons and then selecting the appropriate directional arrow.

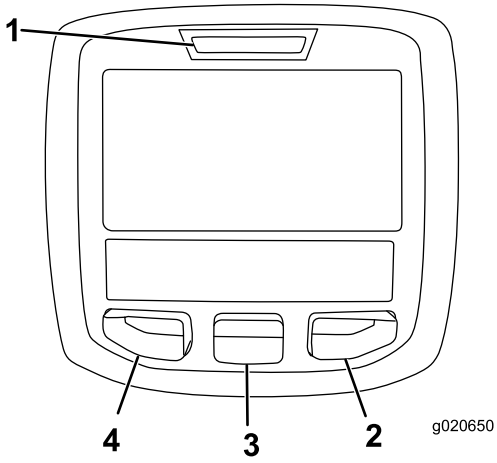




**Figure 6**

1. Indicator light
2. Right button
3. Middle button
4. Left button


- Left Button, Menu Access/Back Button—press this button to access the InfoCenter menus. You can use it to back out of any menu you are currently using.
- Middle Button—use this button to scroll down menus.
- Right Button—use this button to open a menu where a right arrow indicates additional content.

**Note:** The purpose of each button may change depending on what is required at the time. Each button is labeled with an icon displaying its current function.

### InfoCenter Icon Description

| | |
|---|---|
| **SERVICE DUE** | Indicates when scheduled service should be performed |
| **RPM** | Engine RPM/status—indicates the engine RPM |
|  | Hour meter |
|  | Info icon |
|  | Stationary regeneration required |
|  | Glow plugs are active |
|  | Operator must sit in seat |
|  | Parking Brake Indicator—indicates when the parking brake is on |
|  | Coolant Temperature-indicates the engine coolant temperature in either °C or °F |
|  | Temperature (hot) |
|  | Denied or not allowed |
|  | Engine start |
|  | Stop or shutdown |
|  | Engine |
|  | Key switch |
| PIN | PIN code |
| CAN | CAN bus |
|  | InfoCenter |
| Bad | Bad or failed |
|  | Bulb |
| HI | High: over allowed range |
| LO | Low: under allowed range |
| HI /LO | Out of range |
|  | Switch |

### InfoCenter Icon Description (cont'd.)

| | |
|---|---|
|  | Operator must release switch |
|  | Operator should change to indicated state |
| Symbols are often combined to form sentences. Some examples are shown below | |
|  | Engine start denied |
|  | Engine shutdown |
|  | Engine coolant too hot |
|  or | Sit down or set parking brake |

## Using the Menus

To access the InfoCenter menu system, press the menu access button while at the main screen. This brings you to the main menu. Refer to the following tables for a synopsis of the options available from the menus:

| **Main Menu** | |
|---|---|
| **Menu Item** | **Description** |
| Faults | The Faults menu contains a list of the recent machine faults. Refer to the Service Manual or your Authorized Toro Distributor for more information on the Faults menu and the information contained there. |
| Service | The Service menu contains information on the machine such as hours of use and other similar numbers. |
| Settings | The Settings menu allows you to customize and modify configuration variables on the InfoCenter display. |
| About | The About menu lists the model number, serial number, and software version of your machine. |

| Service | |
|---|---|
| **Menu Item** | **Description** |
| Hours | Lists the total number of hours that the machine, engine and fan have been on, as well as the number of hours the machine has been transported and has overheated. |

| Settings | |
|---|---|
| **Menu Item** | **Description** |
| Units | Controls the units used on the InfoCenter. The menu choices are English or Metric |
| Language | Controls the language used on the InfoCenter*. |
| LCD Backlight | Controls the brightness of the LCD display. |
| LCD Contrast | Controls the contrast of the LCD display. |
| Protected Menus | Allows a person authorized by your company with the PIN code to access protected menus. |

* Only "operator-faced" text is translated. Faults, Service, and Diagnostics screens are "service-faced." Titles will be in the selected language, but menu items are in English.

| About | |
|---|---|
| **Menu Item** | **Description** |
| Model | Lists the model number of the machine. |
| SN | Lists the serial number of the machine. |
| Machine Controller Revision | Lists the software revision of the master controller. |
| InfoCenter Revision | Lists the software revision of the InfoCenter. |
| CAN Bus | Lists the machine communication bus status. |

# Protected Menus

There is 1 operating function that is accessed within the Service Menu of the InfoCenter: Regeneration request; refer to Diesel Particulate Filter Regeneration (page 26). This function is in the Protected Menu.

# Accessing Protected Menus

**Note:** The factory default PIN code for you machine is either 0000 or 1234.

If you changed the PIN code and forgot the code, contact your authorized Toro distributor for assistance.

1. From the MAIN MENU, use the center button to scroll down to the SETTINGS MENU and press the right button (Figure 7).





**Figure 7**

2. In the SETTINGS MENU, use the center button to scroll down to the PROTECTED MENU and press the right button (Figure 8A).

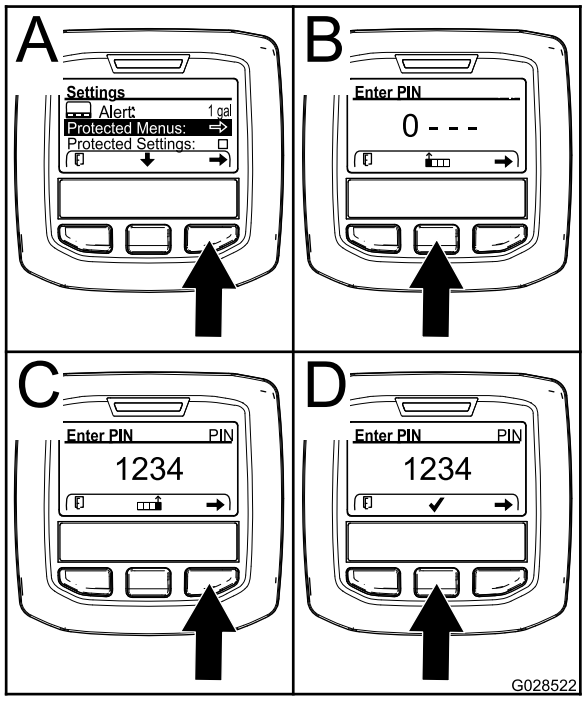



**Figure 8**

3. To enter the PIN code, press the center button until the correct first digit appears, then press the right button to move on to the next digit (Figure 8B and Figure 8C). Repeat this step until the last digit is entered and press the right button once more.
4. Press the middle button to enter the PIN code (Figure 8D).

   Wait until the red indicator light of the InfoCenter illuminates.

   **Note:** If the InfoCenter accepts the PIN code and the protected menu is unlocked, the word “PIN” displays in the upper right corner of the screen.

**Note:** Rotate the key switch to the OFF position and then to the ON position locks the protected menu.

You can view and change the settings in the Protected Menu. Once you access the Protected Menu, scroll down to Protect Settings option. Use the right button to change the setting. Setting the Protect Settings to OFF allows you to view and change the settings in the Protected Menu without entering the PIN code. Setting the Protect Settings to ON hides the protected options and requires you to enter the PIN code to change the setting in the Protected Menu. After you set the PIN code, rotate the key switch OFF and back to the ON position to enable and save this feature.

# Specifications

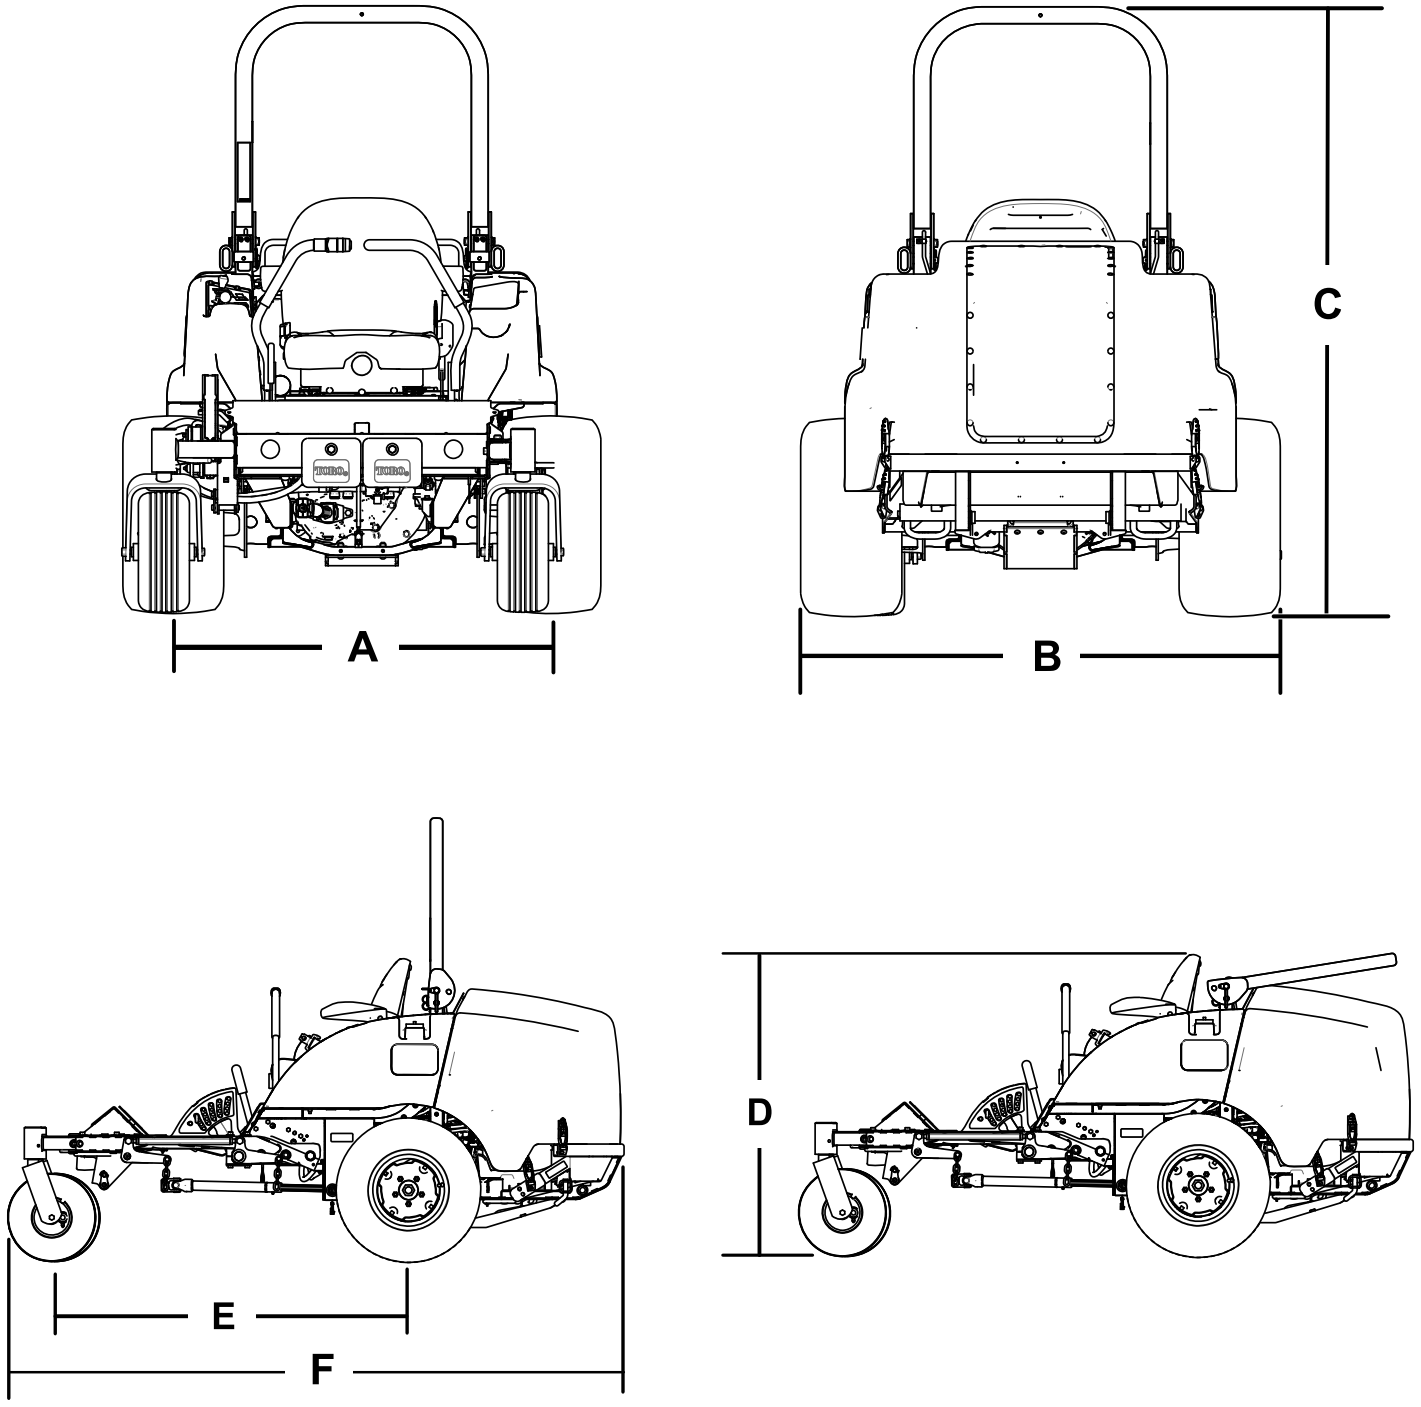



**Figure 9**

| Description | Figure 9 reference | Dimension or Weight |
|---|---|---|
| Height with roll bar up | C | 183 cm (72 inches) |
| Height with roll bar down | D | 125 cm (49 inches) |
| Overall length | F | 253 cm (99-1/2 inches) |
| Overall width | B | 145 cm (57 inches) |
| Wheel base | E | 145 cm (57-1/4 inches) |
| Wheel tread (tire center to center) rear | A | 114 cm (45 inches) |

| | | | |
|---|---|---|---|
| Ground clearance | | | 10 cm (4 inches) |
| Weight, with 72-inch Side-Discharge Mower (30354 or 30481) | | | 1052 kg (2,320 lb) |
| Weight, with 60-inch Side-Discharge Mower (30456) | | | 1036 kg (2,284 lb) |
| Weight, with 72-inch Base Mower Deck (30353) | | | 1012 kg (2,231 lb) |
| Weight, with 62-inch Base Mower Deck (30457) | | | 990 kg (2,183 lb) |
| Weight with the 100-inch Rear-Discharge Mower (31101) | | | 1200 kg (2,646 lb) |

**Note:** Specifications and design are subject to change without notice.

## Attachments/Accessories

A selection of Toro approved attachments and accessories is available for use with the machine to enhance and expand its capabilities. Contact your Authorized Service Dealer or Distributor or go to www.Toro.com for a list of all approved attachments and accessories.

To best protect your investment and maintain optimal performance of your Toro equipment, count on Toro genuine parts. When it comes to reliability, Toro delivers replacement parts designed to the exact engineering specification of our equipment. For peace of mind, insist on Toro genuine parts.

# Operation

**Note:** Determine the left and right sides of the machine from the normal operating position.

# *Before Operation*

## Before Operation Safety

### General Safety

- Never allow children or untrained people to operate or service the machine. Local regulations may restrict the age of the operator. The owner is responsible for training all operators and mechanics.
- Become familiar with the safe operation of the equipment, operator controls, and safety signs.
- Know how to stop the machine and shut off the engine quickly.
- Check that operator-presence controls, safety switches, and shields are attached and functioning properly. Do not operate the machine unless they are functioning properly.
- Before mowing, always inspect the machine to ensure that the blades, blade bolts, and cutting assemblies are in good working condition. Replace worn or damaged blades and bolts in sets to preserve balance.
- Inspect the area where you will use the machine and remove all objects that the machine could throw.

### Fuel Safety

- Use extreme care in handling fuel. It is flammable and its vapors are explosive.
- Extinguish all cigarettes, cigars, pipes, and other sources of ignition.
- Use only an approved fuel container.
- Do not remove the fuel cap or fill the fuel tank while the engine is running or hot.
- Do not add or drain fuel in an enclosed space.

- Do not store the machine or fuel container where there is an open flame, spark, or pilot light, such as on a water heater or other appliance.
- If you spill fuel, do not attempt to start the engine; avoid creating any source of ignition until the fuel vapors have dissipated.

# Adding Fuel

## Fuel Specification

***Important:*** **Use only ultra-low sulphur diesel fuel. Fuel with higher rates of sulfur degrades the diesel oxidation catalyst (DOC), which causes operational problems and shortens the service life of engine components.**

**Failure to observe the following cautions may damage the engine.**

- Never use kerosene or gasoline instead of diesel fuel.
- Never mix kerosene or used engine oil with the diesel fuel.
- Never keep fuel in containers with zinc plating on the inside.
- Do not use fuel additives.

### Petroleum Diesel

**Cetane rating:** 45 or higher

**Sulfur content:** Ultra-low sulfur (<15 ppm)

### Fuel Table

| Diesel fuel specification | Location |
|---|---|
| ASTM D975<br>No. 1-D S15<br>No. 2-D S15 | USA |
| EN 590 | European Union |
| ISO 8217 DMX | International |
| JIS K2204 Grade No. 2 | Japan |
| KSM-2610 | Korea |

- Use only clean, fresh diesel fuel or biodiesel fuels.
- Purchase fuel in quantities that can be used within 180 days to ensure fuel freshness.

Use summer-grade diesel fuel (No. 2-D) at temperatures above -7°C (20°F) and winter-grade fuel (No. 1-D or No. 1-D/2-D blend) below that temperature.

**Note:** Use of winter-grade fuel at lower temperatures provides lower flash point and cold flow characteristics which eases starting and reduces fuel filter plugging.

Using summer-grade fuel above -7°C (20°F) contributes toward longer fuel pump life and increased power compared to winter-grade fuel.

### Using Biodiesel

This machine can also use a biodiesel-blended fuel of up to B20 (20% biodiesel, 80% petrodiesel).

**Sulfur content:** Ultra-low sulfur (<15 ppm)

**Biodiesel fuel specification:** ASTM D6751 or EN14214

**Blended fuel specification:** ASTM D975, EN590, or JIS K2204

***Important:*** **The petroleum diesel portion must be ultra-low sulfur.**

Observe the following precautions:

- Biodiesel blends may damage painted surfaces.
- Use B5 (biodiesel content of 5%) or lesser blends in cold weather.
- Monitor seals, hoses, gaskets in contact with fuel as they may degrade over time.
- Fuel filter plugging may occur for a time after you convert to biodiesel blends.
- For more information on biodiesel, contact your authorized Toro distributor.

## Fuel Tank Capacity


43.5 L (11.5 US gallons)

## Filling the Fuel Tank

***Important:*** **The fuel tanks are connected, but the fuel does not transfer quickly from one tank to the other. It is important when filling that you park on a level surface. If you park on a hill, you may inadvertently overfill the tanks.**

***Important:*** **Do not overfill the fuel tanks.**

***Important:*** **Do not open the fuel tanks when parked on a hill. The fuel could spill out.**

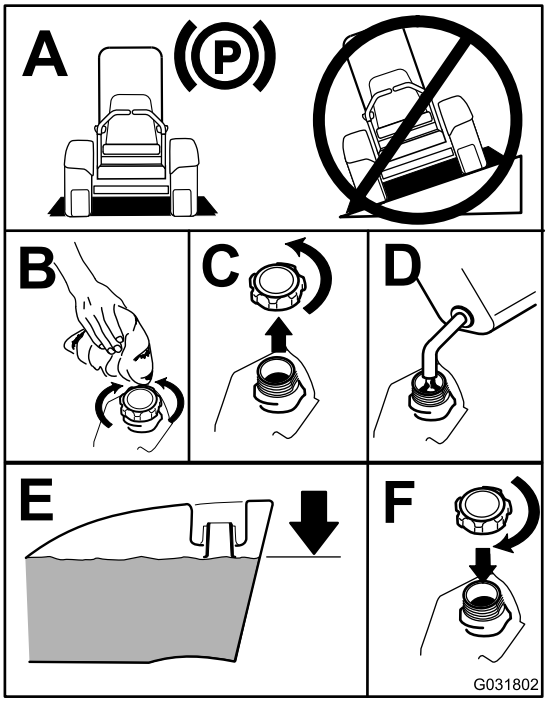


g031802

**Figure 10**

---

**Note:** If possible, fill the fuel tanks after each use. This minimizes buildup of condensation inside the fuel tank.

# Adjusting the Roll Bar

**⚠ WARNING**

**To avoid injury or death from rollover, keep the roll bar in the raised locked position and use the seat belt.**

**Ensure that the seat is secured with the seat latch.**

**⚠ WARNING**

**There is no rollover protection when the roll bar is in the down position.**


- **Do not operate the machine on uneven ground or on a hill side with the roll bar in the down position.**
- **Lower the roll bar only when absolutely necessary.**
- **Do not wear the seat belt when the roll bar is in the down position.**
- **Drive slowly and carefully.**
- **Raise the roll bar as soon as clearance permits.**
- **Check carefully for overhead clearances (i.e., branches, doorways, electrical wires) before driving under any objects and do not contact them.**

***Important:*** **Always use the seat belt when the roll bar is in the raised and locked position. Do not use the seat belt when the roll bar is in the lowered position.**


## Lowering the Roll Bar

Lower the roll bar as shown in Figure 12.

**Note:** Push the bar forward to relieve pressure on the pins.




g031636

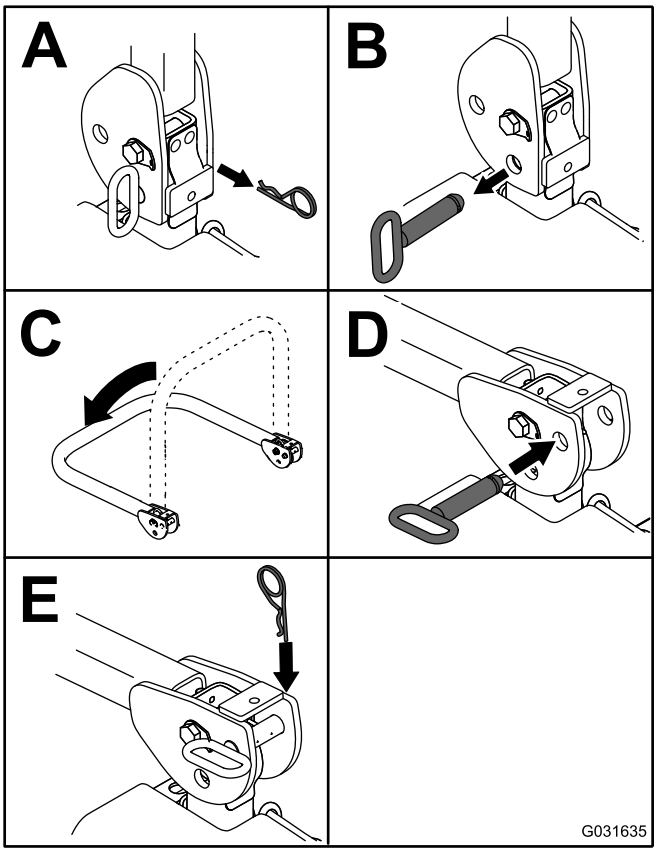



g031635

**Figure 11**


**Note:** Secure the roll bar so that it does not damage the hood.

## Raising the Roll Bar

Raise the roll bar as shown in Figure 11.




g031636

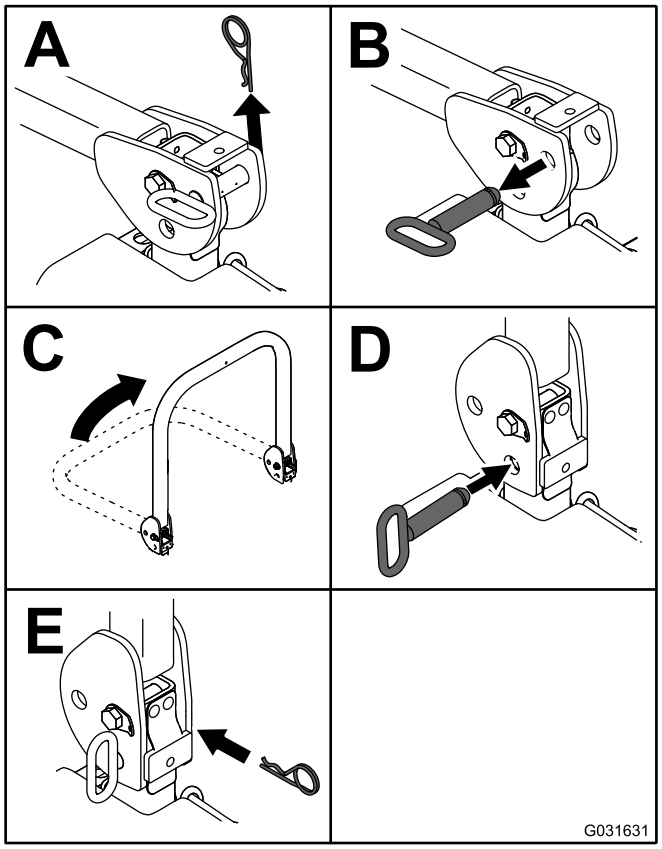


g031631

**Figure 12**

***Important:*** **Always use the seat belt when the roll bar is in the raised and locked position. Do not use the seat belt when the roll bar is in the lowered position.**

# Adjusting the Height of Cut

You can adjust the height of cut from 2.5 to 15.8 cm (1 to 6 inches) in 6 mm (1/4 inch) increments by relocating the stop pin into different hole locations.

1. With the engine running, push the deck-lift switch up until the mower deck is fully raised and **release the switch immediately** (Figure 24).
2. Rotate the stop pin until the roll pin in it lines up with the slots in the holes in the height-of-cut bracket and remove it (Figure 13).
3. Select a hole in the height-of-cut bracket corresponding to the height of cut desired, insert the pin, and rotate it down to lock it in place (Figure 13).

   **Note:** There are 4 rows of hole positions (Figure 13). The top row gives you the height of cut listed above the pin. The second row down gives you the height listed plus 6 mm (1/4 inch). The third row down gives you the height listed plus 12 mm (1/2 inch). The bottom row gives you the height listed plus 18 mm (3/4 inch). For the 15.8 cm (6 inch) position, there is only 1 hole, located in the second row. This does not add 6 mm (1/4 inch) to the 15.8 cm (6 inch) position.

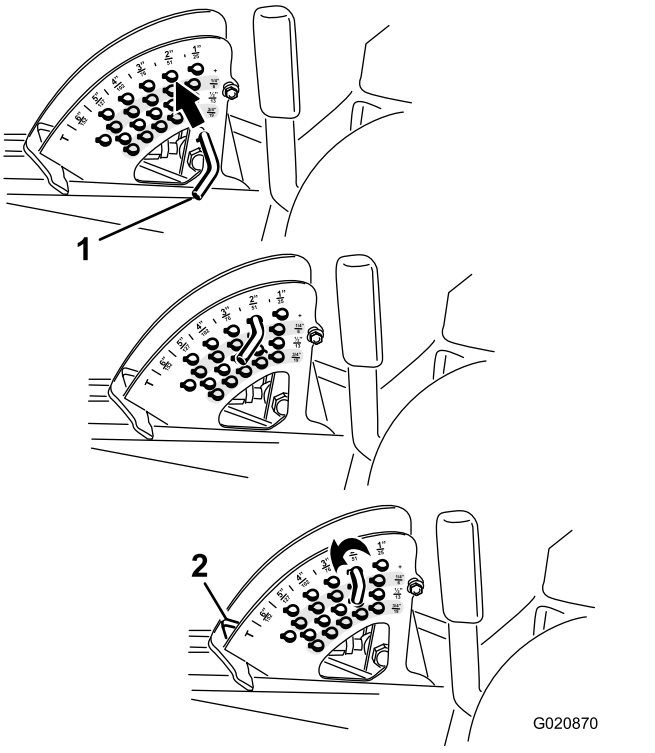



**Figure 13**

1. Stop pin
2. Height-of-cut stop

4. Adjust the anti-scalp rollers and skids as required.

# Using the Safety-Interlock System

**⚠ CAUTION**

**If the safety-interlock switches are disconnected or damaged, the machine could operate unexpectedly, causing personal injury.**

- **Do not tamper with the interlock switches.**
- **Check the operation of the interlock switches daily and replace any damaged switches before operating the machine.**

## Understanding the Safety-Interlock System

The safety-interlock system prevents the engine from starting unless:

- You are sitting on the seat or the parking brake is engaged.
- The power takeoff (PTO) is disengaged.
- The motion-control levers are in the NEUTRAL-LOCK position.
- The engine temperature is below the maximum operating temperature.

The safety-interlock system also shuts off the engine when you move the traction controls from the NEUTRAL-LOCK position with the parking brake engaged. If you rise from the seat when the PTO is engaged, there is a 1-second delay and then the engine shuts off.

## Testing the Safety-Interlock System

**Service Interval:** Before each use or daily

Test the safety-interlock system before you use the machine each time. If the safety system does not operate as described below, have an Authorized Service Dealer repair the safety system immediately.

1. Sit on the seat, engage the parking brake, and move the PTO to the ON position. Try starting the engine; the engine should not crank.
2. Sit on the seat, engage the parking brake, and move the PTO to the OFF position. Move either motion-control lever out of the NEUTRAL-LOCK position. Try starting the engine; the engine should not crank. Repeat for other motion-control lever.
3. Sit on the seat, engage the parking brake, move the PTO switch to the OFF position, and move the motion-control levers to the NEUTRAL-LOCK

position. Start the engine. While the engine is running, release the parking brake, engage the PTO, and rise slightly from the seat; the engine should shut off within 2 seconds.

4. Without an operator on the seat, engage the parking brake, move the PTO switch to the OFF position, and move the motion-control levers to the NEUTRAL-LOCK position. Start the engine. While the engine is running, center either motion control; the engine should shut off within 2 seconds. Repeat for the other motion-control lever.
5. Without an operator on the seat, disengage the parking brake, move the PTO switch to the OFF position, and move the motion-control levers to the NEUTRAL-LOCK position. Try starting the engine; the engine should not crank.

## Using the SCM to Diagnose System Problems

The machine is equipped with a standard control module (SCM) monitoring system that tracks the function of various key systems. The SCM is located under the right control panel. Access it through the side panel cover (Figure 14). To open the side panel cover, release the 2 latches and pull out on it.

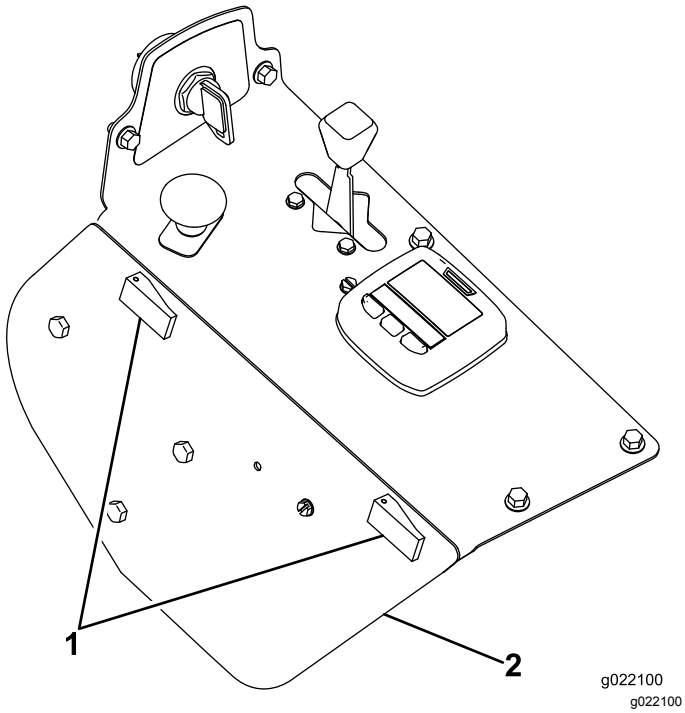



Figure 14

1. Side panel cover
2. Latches

On the face of the SCM are 11 LEDs that illuminate to indicate various system conditions. You can use 7 of these lights for system diagnosis. Refer to Figure 15 for a description of what each light means. For details on using the rest of the SCM functions, refer to the *Service Manual*, available through your Authorized Toro Distributor.

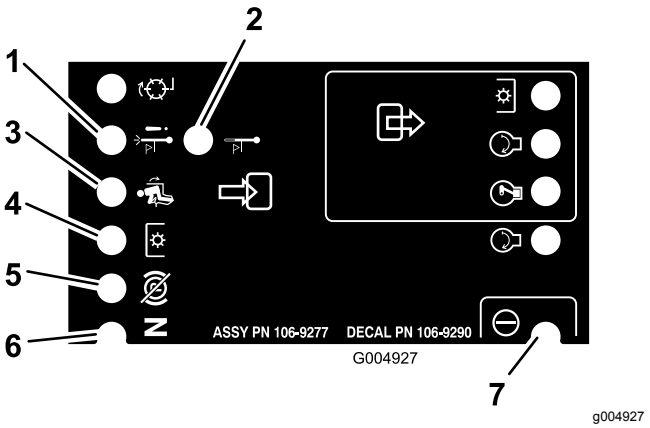



Figure 15

1. High temperature shutdown—the engine temperature has exceeded safe levels and the engine has been shut down. Check the cooling system.
2. High temperature warning—the engine temperature is approaching unsafe levels and the mower deck has been shut down. Check the cooling system.
3. Operator is in the seat.
4. The PTO is on.
5. The parking brake is not engaged.
6. Controls are in neutral.
7. The SCM is receiving power and is operational.

# Positioning the Seat

The seat moves forward and backward. Position the seat where you have the best control of the machine and are most comfortable.

To adjust, move the lever sideways to unlock the seat (Figure 16).


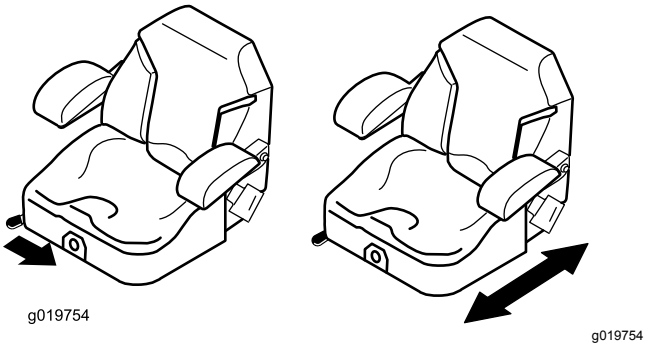



Figure 16

# Changing the Seat Suspension

The seat is adjustable to provide a smooth and comfortable ride. Position the seat where you are most comfortable.

To adjust it, turn the knob in front either direction to provide the best comfort (Figure 17).

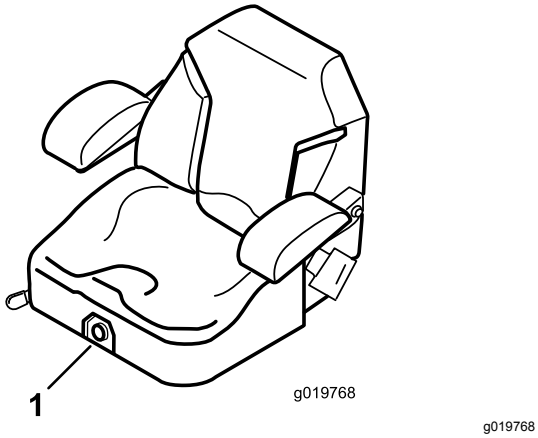


g019768


**Figure 17**

1. Seat-suspension knob

# Unlatching the Seat

To access the hydraulic and other systems under the seat, unlatch the seat and swing it forward.

1. Use the seat position adjustment lever to slide the seat all the way forward.
2. Pull the seat latch forward and lift up to unlatch the seat (Figure 18).

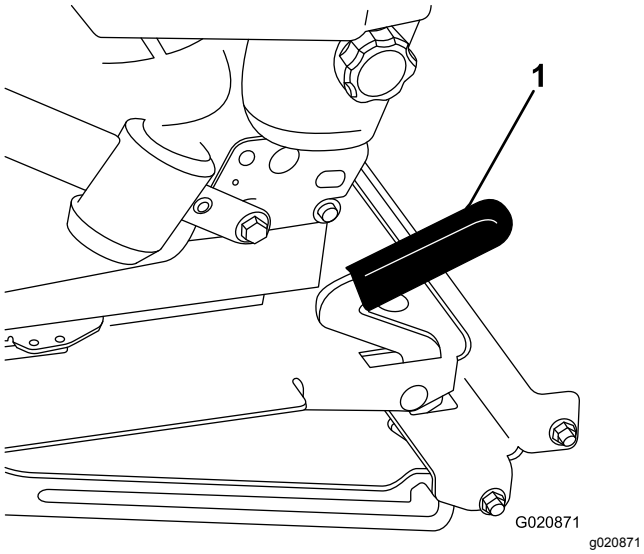


g020871

**Figure 18**

1. Seat latch

# *During Operation*

# During Operation Safety

## General Safety

- The owner/operator can prevent and is responsible for accidents that may cause personal injury or property damage.
- Wear appropriate clothing, including eye protection; long pants; substantial, slip-resistant footwear; and hearing protection. Tie back long hair and do not wear loose jewelry.
- Do not operate the machine while ill, tired, or under the influence of alcohol or drugs.
- Never carry passengers on the machine and keep bystanders and pets away from the machine during operation.
- Operate the machine only in good visibility to avoid holes or hidden hazards.
- Before you start the engine, ensure that all drives are in neutral, the parking brake is engaged, and you are in the operating position.
- Keep your hands and feet away from rotating parts. Keep clear of the discharge opening at all times.
- Look behind and down before backing up to be sure of a clear path.
- Use care when approaching blind corners, shrubs, trees, or other objects that may obscure your vision.
- Stop the blades whenever you are not mowing.
- Stop the machine, remove the key, and wait for all moving parts to stop before inspecting the attachment after striking an object or if there is an abnormal vibration in the machine. Make all necessary repairs before resuming operation.
- Slow down and use caution when making turns and crossing roads and sidewalks with the machine. Always yield the right-of-way.
- Disengage the drive to the cutting unit, shut off the engine, remove the key, and wait for all moving parts to stop before adjusting the height of cut (unless you can adjust it from the operating position).
- Never run an engine in an area where exhaust gasses are enclosed.
- Never leave a running machine unattended.
- Before leaving the operating position (including to empty the catchers or to unclog the chute), do the following:
  - Park the machine on level ground.

  - Disengage the power takeoff and lower the attachments.
  - Engage the parking brake.
  - Shut off the engine and remove the key.
  - Wait for all moving parts to stop.
- Do not operate the machine when there is the risk of lightning.
- Do not use the machine as a towing vehicle.
- Use accessories, attachments, and replacement parts approved by The Toro® Company only.

# Rollover Protection System (ROPS) Safety

- **Do not** remove the ROPS from the machine.
- Ensure that the seat belt is attached and that you can release it quickly in an emergency.
- Check carefully for overhead obstructions and do not contact them.
- Keep the ROPS in safe operating condition by thoroughly inspecting it periodically for damage and keeping all the mounting fasteners tight.
- Replace damaged ROPS components. Do not repair or alter them.

### Machines with a Foldable Roll Bar

- Always use the seat belt with the roll bar in the raised position.
- The ROPS is an integral safety device. Keep a folding roll bar in the raised and locked position, and use the seat belt when operating the machine with the roll bar in the raised position.
- Lower a folding roll bar temporarily only when necessary. Do not wear the seat belt when the roll bar is folded down.
- Be aware that there is no rollover protection when a folded roll bar is in the down position.
- Check the area that you will be mowing and never fold down a folding roll bar in areas where there are slopes, drop-offs, or water.

# Slope Safety

Slopes are a major factor related to loss of control and rollover accidents, which can result in severe injury or death. You are responsible for safe slope operation. Operating the machine on any slope requires extra caution.

- Evaluate the site conditions to determine if the slope is safe for machine operation including surveying the site. Always use common sense and good judgment when performing this survey.
- Review the slope instructions listed below for operating the machine on slopes and review the conditions in which you would operate the machine to determine whether you can operate it in the conditions on that day and at that site. Changes in the terrain can result in a change in slope operation for the machine.
- Avoid starting, stopping, or turning the machine on slopes. Avoid making sudden changes in speed or direction. Make turns slowly and gradually.
- Do not operate a machine under any conditions where traction, steering, or stability is in question.
- Remove or mark obstructions such as ditches, holes, ruts, bumps, rocks, or other hidden hazards.

Tall grass can hide obstructions. Uneven terrain could overturn the machine.

- Be aware that operating the machine on wet grass, across slopes, or downhill may cause the machine to lose traction. Loss of traction to the drive wheels may result in sliding and a loss of braking and steering.
- Use extreme caution when operating the machine near drop-offs, ditches, embankments, water hazards, or other hazards. The machine could suddenly roll over if a wheel goes over the edge or the edge caves in. Establish a safety area between the machine and any hazard.
- Identify hazards at the base of the slope. If there are hazards, mow the slope with a pedestrian-controlled machine.
- If possible, keep the cutting unit(s) lowered to the ground while operating on slopes. Raising the cutting unit(s) while operating on slopes can cause the machine to become unstable.
- Use extreme caution while operating the machine with grass-collection systems or other attachments. These can change the stability of the machine and cause a loss of control.

# Operating the Parking Brake


Always engage the parking brake when you stop the machine or leave it unattended.

## Engaging the Parking Brake

**⚠ WARNING**

**The parking brake may not hold the machine parked on a slope and could cause personal injury or property damage.**


**Do not park the machine on slopes unless the wheels are chocked or blocked.**

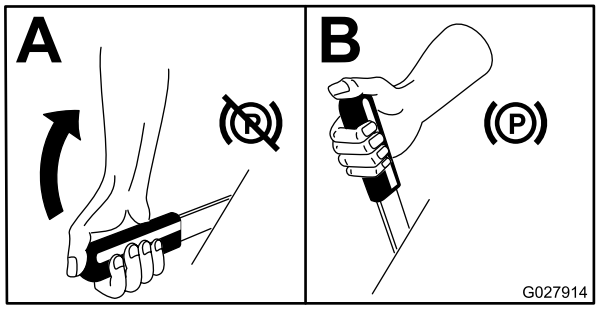

g027914

**Figure 19**

## Releasing the Parking Brake

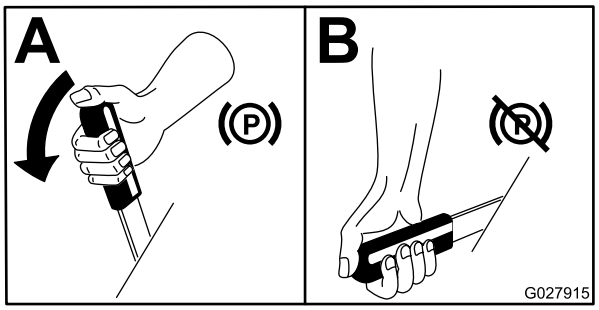

g027915

**Figure 20**

# Starting the Engine

**Note:** The glow plug light illuminates for 6 seconds when you turn the ignition key to the RUN position. Turn the ignition to the START position after the light goes out.

***Important:*** **Use starting cycles of no more than 15 seconds per minute to avoid overheating the starter motor.**

***Important:*** **Operate the machine with the throttle lever in the SLOW position in both the forward and reverse directions for 1 to 2 minutes after changing the engine oil, overhauling either the engine, transmission, or wheel motor, and when you start the engine for the first time. Operate the lift lever and PTO lever to ensure that they operate properly. Shut the engine off, check fluid levels, and check for oil leaks, loose parts, and any other noticeable malfunctions.**

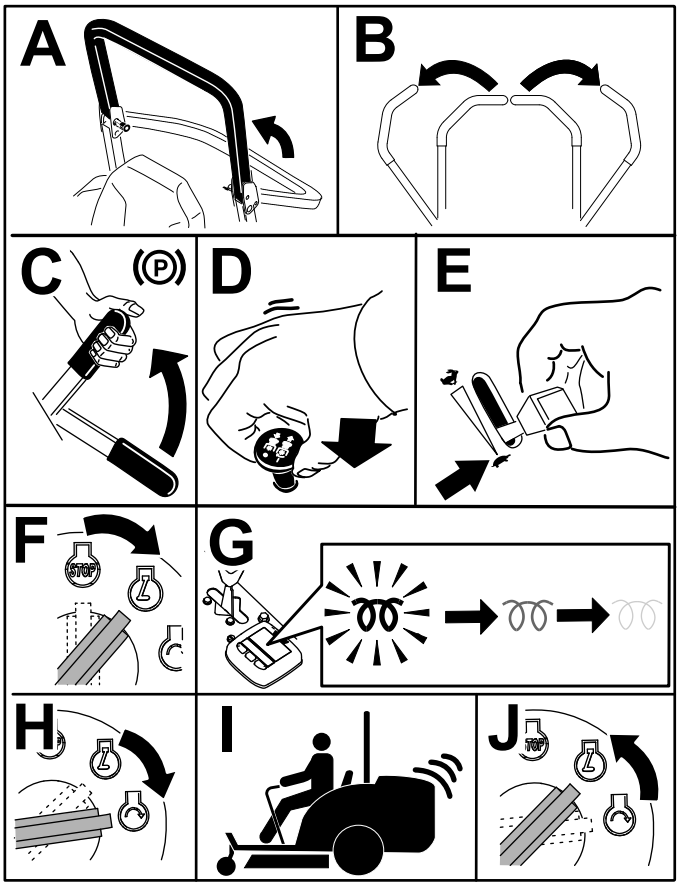



**Figure 21**

**Note:** Leave the throttle midway between the SLOW and FAST positions until the engine and hydraulic system warm up.

# Driving the Machine

The throttle control regulates the engine speed as measured in rpm (revolutions per minute). Place the throttle control in the FAST position for best performance. Always operate in the FAST throttle position when running powered attachments.

**⚠ CAUTION**

**The machine can turn very rapidly. You may lose control of it and cause personal injury or damage the machine.**

- **Use caution when making turns.**
- **Slow the machine down before making sharp turns.**

1. Release the parking brake.

   **Note:** The engine shuts off if you move the motion-control levers out of the NEUTRAL-LOCK position with the parking brake engaged.

2. Move the levers to the center, unlocked position.
3. Drive the machine as follows:
   - To move straight forward, slowly push the motion-control levers forward (Figure 22).
   - To move straight rearward, slowly pull the motion-control levers rearward (Figure 22).
   - To turn, slow the machine by pulling back on both levers and then push forward on the lever on the opposite side from which you want to turn (Figure 22).
   - To stop, pull the motion-control levers to the NEUTRAL position.

   **Note:** The farther you move the motion-control levers in either direction, the faster the machine moves in that direction.

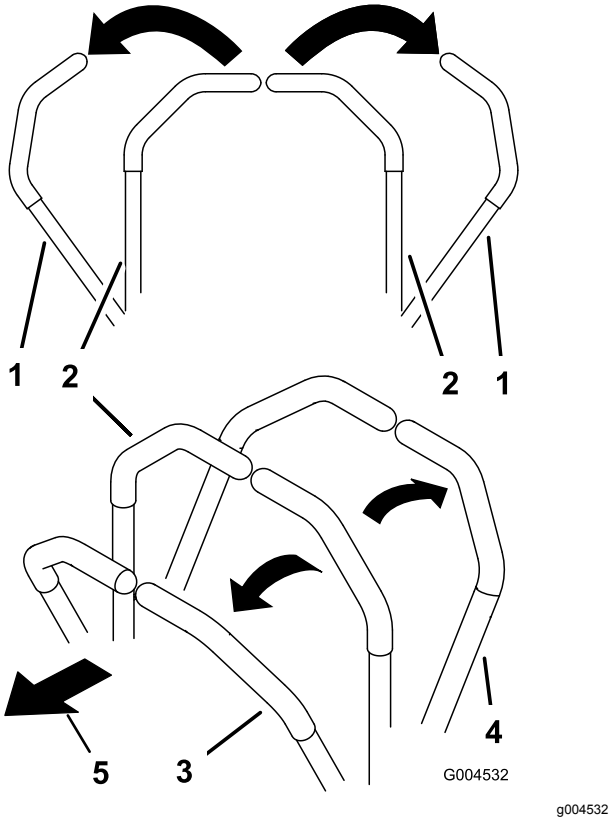



**Figure 22**


1. Motion-control lever—NEUTRAL-LOCK position
2. Center, unlocked position
3. Forward
4. Backward
5. Front of the machine

# Shutting Off the Engine

**⚠ CAUTION**

**Children or bystanders may be injured if they attempt to move or operate the tractor while it is unattended.**

**Always remove the ignition key and engage the parking brake when leaving the machine unattended, even if just for a few minutes.**

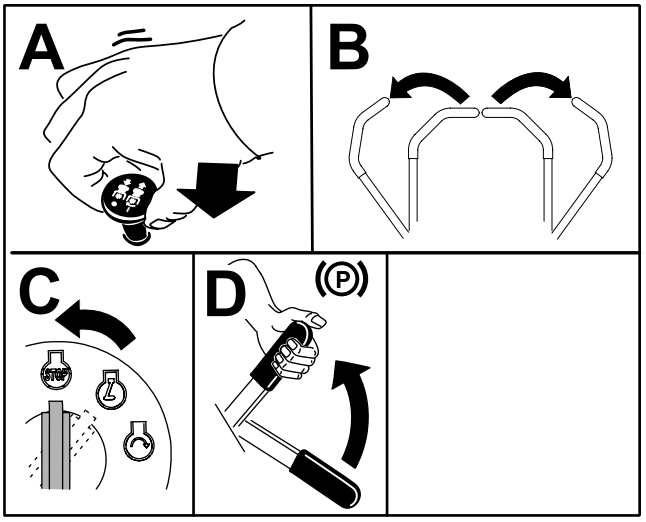


g243800

**Figure 23**

# Operating the Mower

## Using the Deck-Lift Switch

The deck-lift switch raises and lowers the mower deck (Figure 24). The engine must be running for you to use this lever.

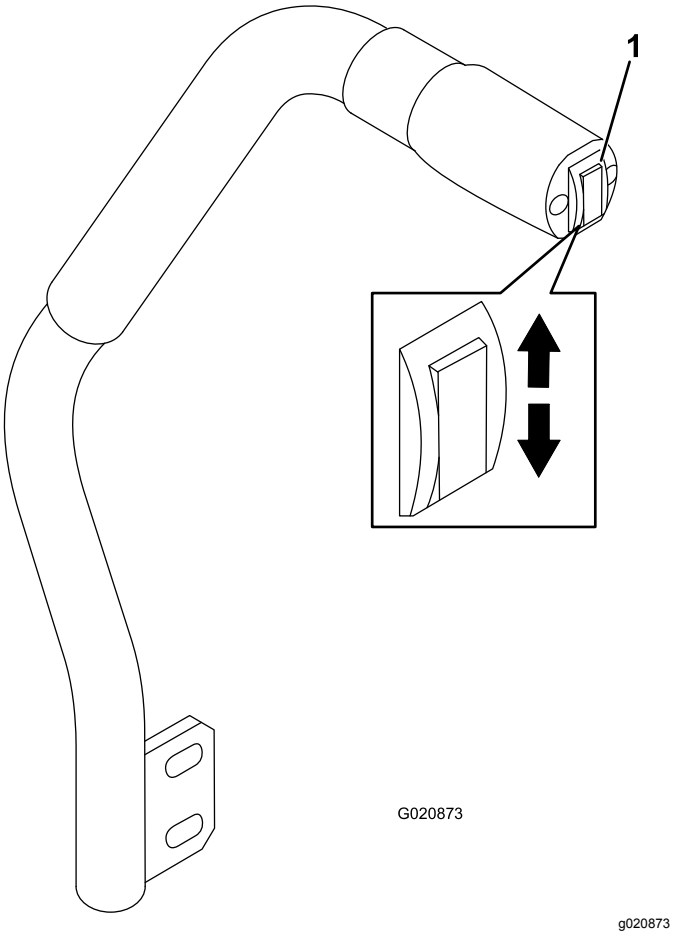



**Figure 24**

1. Deck-lift switch

- To lower the mower deck, push the deck-lift switch down (Figure 24).

  ***Important:*** **When you lower the mower deck, it sets in a float/idle position.**

- To raise the mover deck, push the deck-lift switch up (Figure 24).

***Important:*** **Do not continue to hold the switch up or down after the mower has fully raised or lowered. Doing so damages the hydraulic system.**

## Engaging the Power Takeoff (PTO)

The power-takeoff (PTO) switch starts and stops the mower blades and some powered attachments.

**Note:** If the engine is cold, allow the engine to warm up 5 to 10 minutes before engaging the PTO.

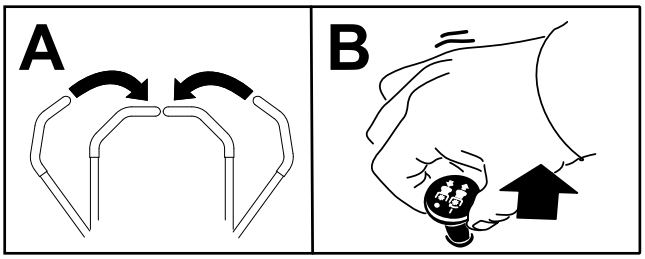



**Figure 25**

## Disengaging the PTO





**Figure 26**

# Cutting Grass with the Machine

**Note:** Cutting grass at a rate that loads the engine promotes DPF regeneration.

1. Move the machine to the job site.
2. Whenever possible, set the throttle to high idle.
3. Engage the PTO switch.
4. Gradually move the motion-control levers forward and slowly drive the machine over the mowing area.
5. Once the front of the cutting units are over the mowing area, lower the cutting units.
6. Cut grass so that the blades can cut and discharge clippings at a high rate while producing a good quality of cut.

   **Note:** If the cutting rate is too high, the quality of cut may deteriorate. Reduce the ground speed of the machine or reduce the width of cut to regain high idle engine speed.
7. When the cutting units are over the far edge of the mowing area, lift the cutting units.
8. Perform a tear-shaped turn to quickly line up for your next pass.

# Diesel Particulate Filter Regeneration

The diesel particulate filter (DPF) is part of the exhaust system. The diesel-oxidation catalyst of the DPF reduces harmful gasses and the soot filter removes soot from the engine exhaust.

The DPF regeneration process uses heat from the engine exhaust to incinerate the soot accumulated on the soot filter, converting the soot to ash, and clears the channels of the soot filter so that filtered engine exhaust flows out the DPF.

The engine computer monitors the accumulation of soot by measuring the back pressure in the DPF. If the back pressure is too high, soot is not incinerating in the soot filter through normal engine operation. To keep the DPF clear of soot, remember the following:

- Passive regeneration occurs continuously while the engine is running—run the engine at full engine speed when possible to promote DPF regeneration.
- If the back pressure in the DPF is too high or a reset regeneration has not occurred for 100 hours, the engine computer signals you through the InfoCenter when reset regeneration is running.
- Allow the reset regeneration process to complete before shutting off the engine.



Operate and maintain your machine with the function of the DPF in mind. Engine load at high idle (full throttle) engine speed generally produces adequate exhaust temperature for DPF regeneration.

***Important:*** **Minimize the amount of time that you idle the engine or operate the engine at low-engine speed to help reduce the accumulation of soot in the soot filter.**

# DPF Soot Accumulation

- Over time, the diesel particulate filter accumulates soot in the soot filter. The computer for the engine monitors the soot level in the DPF.
- When enough soot accumulates, the computer informs you that it is time to regenerate the DPF.
- DPF regeneration is a process that heats the DPF to convert the soot to ash.
- In addition to the warning messages, the computer reduces the power produced by the engine at different soot-accumulation levels.




## Engine Warning Messages—Soot Accumulation

| Indication Level | Fault Code | Engine Power Rating | Recommended Action |
|---|---|---|---|
| Level 1: Engine Warning | <br>g213866<br>**Figure 27**<br>Check Engine<br>SPN 3719, FMI 16 | The computer de-rates the engine power to 85%. | Perform a parked regeneration as soon as possible; refer to Parked or Recovery Regeneration (page 34). |
| Level 2: Engine Warning | <br>g213867<br>**Figure 28**<br>Check Engine<br>SPN 3719, FMI 0 | The computer de-rates the engine power to 50%. | Perform a recovery regeneration as soon as possible; refer to Parked or Recovery Regeneration (page 34). |

# DPF Ash Accumulation

- The lighter ash is discharged through the exhaust system; the heavier ash collects in the soot filter.
- Ash is a residue of the regeneration process. Over time, the diesel particulate filter accumulates ash that does not discharge with the engine exhaust.
- The computer for the engine calculates the amount of ash accumulated in the DPF.
- When enough ash accumulates, the engine computer sends information to the InfoCenter in the form of an engine fault to indicate the accumulation of ash in the DPF.
- The fault messages indicate that it is time to service the DPF.
- In addition to the warnings, the computer reduces the power produced by the engine at different ash-accumulation levels.

## InfoCenter Advisory and Engine Warning Messages—Ash Accumulation


| Indication Level | Fault Code | Engine Speed Reduction | Engine Power Rating | Recommended Action |
|---|---|---|---|---|
| Level 1: Engine Warning | <br>g213863<br>**Figure 29**<br>Check Engine SPN 3720, FMI 16 | None | The computer de-rates the engine power to 85%. | Service the DPF; refer to Servicing the Diesel-Oxidation Catalyst (DOC) and the Soot Filter (page 48) |
| Level 2: Engine Warning | <br>g213863<br>**Figure 30**<br>Check Engine SPN 3720, FMI 16 | None | The computer de-rates the engine power to 50%. | Service the DPF; refer to Servicing the Diesel-Oxidation Catalyst (DOC) and the Soot Filter (page 48) |
| Level 3: Engine Warning | <br>g214715<br>**Figure 31**<br>Check Engine SPN 3251, FMI 0 | Engine speed at maximum torque + 200 rpm | The computer de-rates the engine power to 50%. | Service the DPF; refer to Servicing the Diesel-Oxidation Catalyst (DOC) and the Soot Filter (page 48) |

# Types of Diesel Particulate Filter Regeneration


## Types of diesel particulate filter regeneration that are performed while the machine is operating:

| Type of Regeneration | Conditions that cause DPF regeneration | DPF description of operation |
|---|---|---|
| **Passive** | Occurs during normal operation of the machine at high-engine speed or high-engine load | • The InfoCenter does not display an icon indicating passive regeneration.<br>• During passive regeneration, the DPF processes high-heat exhaust gasses, oxidizing harmful emissions, and burning soot to ash.<br>Refer to Passive DPF Regeneration (page 31). |
| **Assist** | Occurs because of low-engine speed, low-engine load, or after the computer detects the DPF is becoming obstructed with soot | • The InfoCenter does not display an icon indicating assist regeneration.<br>• During assist regeneration, the engine computer adjusts the engine settings to raise the exhaust temperature.<br>Refer to Assist DPF Regeneration (page 32). |
| **Reset** | Occurs every 100 hours<br>Also occurs after assist regeneration only if the computer detects that assist regeneration did not sufficiently reduce the soot level | • When the high exhaust-temperature icon  is displayed in the InfoCenter, a regeneration is in progress.<br>• During reset regeneration, the engine computer adjusts the engine settings to raise the exhaust temperature.<br>Refer to Reset Regeneration (page 32). |

## Types of diesel particulate filter regeneration that require you to park the machine:

| Type of Regeneration | Conditions that cause DPF regeneration | DPF description of operation |
|---|---|---|
| **Parked** | Occurs because the computer detects back pressure in the DPF due to soot buildup<br>Also occurs because the operator initiates a parked regeneration<br>May occur because you set the InfoCenter to inhibit reset regeneration and continued operating the machine, adding more soot when the DPF already needs a reset regeneration<br>May result from using the incorrect fuel or engine oil | • When the reset-standby/parked or recovery regeneration icon  or ADVISORY #188 displays in the InfoCenter, a regeneration is requested.<br>• Perform the parked regeneration as soon as possible to avoid needing a recovery regeneration.<br>• A parked regeneration requires 30 to 60 minutes to complete.<br>• You must have at least a 1/4 tank of fuel in the tank.<br>• You must park the machine to perform a parked regeneration.<br>Refer to Parked or Recovery Regeneration (page 34). |


**Types of diesel particulate filter regeneration that require you to park the machine: (cont'd.)**

| Type of Regeneration | Conditions that cause DPF regeneration | DPF description of operation |
|---|---|---|
| **Recovery** | Occurs because the operator ignored requests for a parked regeneration and continued operating the machine, adding more soot to the DPF | • When the reset-standby/parked or recovery regeneration icon  or ADVISORY #190 displays in the InfoCenter, a recovery regeneration is requested.<br>• A recovery regeneration requires up to 3 hours to complete.<br>• You must have at least a 1/2 tank of fuel in the machine.<br>• You must park the machine to perform a recovery regeneration.<br>Refer to Parked or Recovery Regeneration (page 34). |

# Accessing the DPF Regeneration Menus

## Accessing the DPF Regeneration Menus

1. Access the Service menu, press the center button to scroll down to the DPF REGENERATION option (Figure 32).

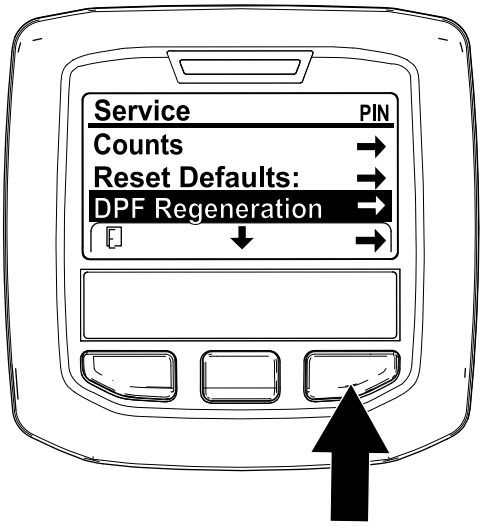


g227667


**Figure 32**

2. Press the right button to select the DPF Regeneration entry (Figure 32).

## Time Since Last Regeneration

Access the DPF Regeneration menu, press the center button to scroll down to the LAST REGEN field (Figure 33).

Use the LAST REGEN field to determine how many hours you have run the engine since the last reset, parked, or recovery regeneration.

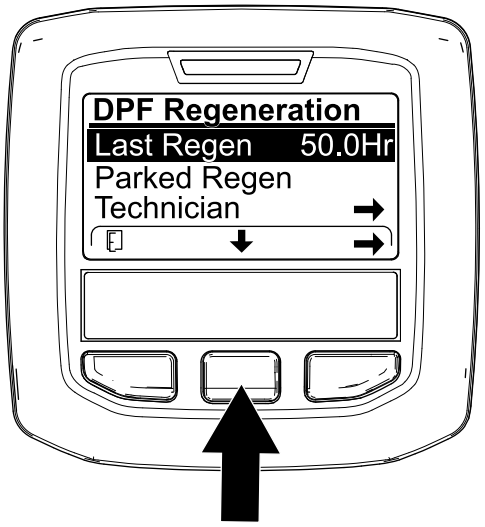


g224693

**Figure 33**


## Technician Menu

***Important:*** **For operating convenience, you may decide to perform a parked regeneration before the soot load reaches 100%, provided the engine has run more than 50 hours since the last successful reset, parked, or recovery regeneration.**

Use the technician menu to view the current state of engine regeneration control and view the reported soot level.

Access the DPF Regeneration menu, press the center button to scroll down to the TECHNICIAN option, and


press the right button to select the Technician entry (Figure 34).

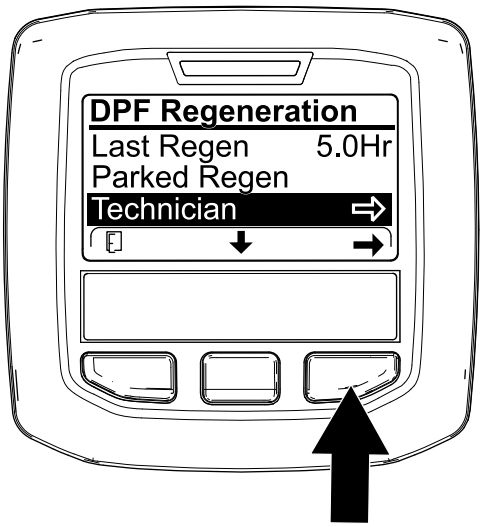


g227348

**Figure 34**

- Use the DPF operation table to understand the current state of DPF operation (Figure 35).

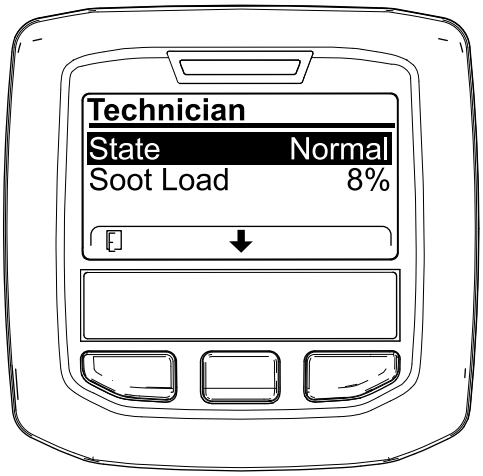


g227360

**Figure 35**

.

## DPF Operation Table


| State | Description | |
|---|---|---|
| Normal | The DPF is in normal-operating mode—passive regeneration. | |
| Assist Regen | The engine computer is performing an assist regeneration. | |
| Reset Stby | The engine computer is trying to run a reset regeneration, but 1 of the following conditions prevents regeneration: | The regen inhibit setting is set to On. |
| | | The exhaust temperature is too low for regeneration. |

## DPF Operation Table (cont'd.)

| State | Description |
|---|---|
| Reset Regen | The engine computer is running a reset regeneration. |
| Parked Stby | The engine computer is requesting that you run a parked regeneration. |
| Parked Regen | You initiated a parked regeneration request and the engine computer is processing the regeneration. |
| Recov. Stby | The engine computer is requesting that you run a recovery regeneration. |
| Recov. Regen | You initiated a recovery regeneration request and the engine computer is processing the regeneration. |

- View the soot load which is measured as the percentage of soot in the DPF(Figure 36); refer to the soot-load table.

  **Note:** The soot load value varies as the machine is operated and DPF regeneration occurs.




g227359

**Figure 36**

## Soot-Load Table

| Important Soot Load Values | Regeneration State |
|---|---|
| 0% to 5% | Minimum soot load range |
| 78% | The engine computer performs an assist regeneration. |
| 100% | The engine computer automatically requests a parked regeneration. |
| 122% | The engine computer automatically requests a recovery regeneration. |

# Passive DPF Regeneration

- Passive regeneration occurs as part of normal engine operation.
- While operating the machine, run the engine at full-engine speed and high load when possible to promote DPF regeneration.

## Assist DPF Regeneration


- The engine computer adjusts engine settings to raise the exhaust temperature.
- While operating the machine, run the engine at full engine speed and high load when possible to promote DPF regeneration.

## Reset Regeneration

**⚠ CAUTION**

**The exhaust temperature is hot (approximately 600°C (1,112°F) during DPF regeneration. Hot exhaust gas can harm you or other people.**

- **Never operate the engine in an enclosed area.**
- **Make sure that there are no flammable materials around the exhaust system.**
- **Never touch a hot exhaust system component.**
- **Never stand near or around the exhaust pipe of the machine.**

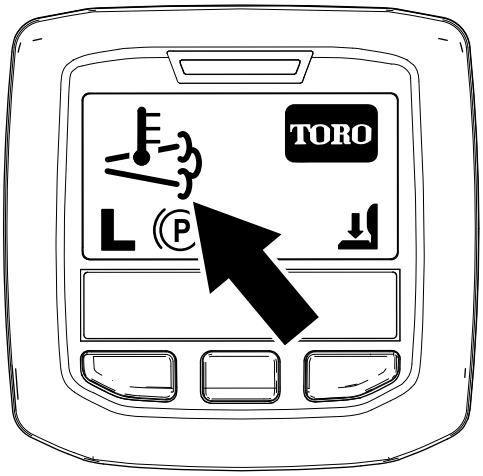


g224417

**Figure 37**

- The high exhaust-temperature icon  displays in the InfoCenter (Figure 37).
- The engine computer adjusts engine settings to raise the exhaust temperature.

  ***Important:*** **The high exhaust-temperature icon indicates that the exhaust temperature discharged from of your machine may be hotter than during regular operation.**
- While operating the machine, run the engine at full engine speed and high load when possible to promote DPF regeneration.
- The icon displays in the InfoCenter while the reset regeneration is processing.
- Whenever possible, do not shut off the engine or reduce engine speed while the reset regeneration is processing.

  ***Important:*** **Whenever possible, allow the machine to complete the reset regeneration process before shutting off the engine.**


### Periodic Reset Regeneration

If the engine has not completed a successful Reset, Parked, or Recovery regeneration in the previous 100 hours of engine operation, the engine computer will attempt to perform a reset regeneration.

### Setting the Inhibit Regen

**Reset Regeneration Only**

**Note:** If you set the InfoCenter to inhibit regeneration, the InfoCenter displays ADVISORY #185 (Figure 38) every 15 minutes while the engine requests a reset regeneration.





g224692

**Figure 38**

A reset regeneration produces the elevated engine exhaust. If you are operating the machine around trees, brush, tall grass, or other temperature-sensitive plants or materials, you can use the Inhibit Regen setting to prevent the engine computer from performing a reset regeneration.

***Important:*** **When you shut off the engine and start it again, the inhibit regen setting defaults to OFF.**


1. Access the DPF Regeneration menu, press the center button to scroll down to the INHIBIT REGEN option, and press the right button to select the Inhibit Regen entry (Figure 39).

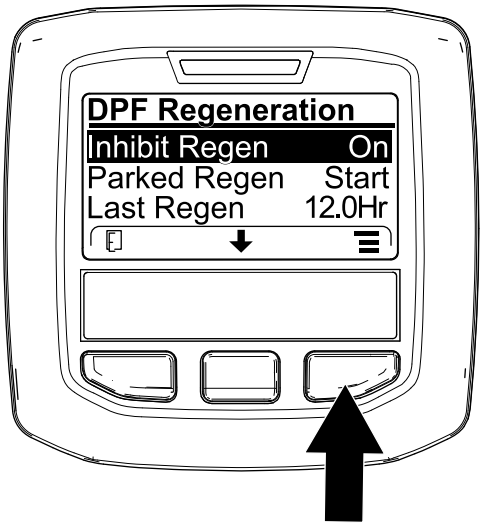


g227304

**Figure 39**

2. Press the right button to change the inhibit regeneration setting from On to Off (Figure 39) or from Off to On (Figure 40).





g224691

**Figure 40**

### Allowing a Reset Regeneration

The InfoCenter displays the high exhaust-temperature icon when the reset regeneration is in process.


**Note:** If INHIBIT REGEN is set to ON, the InfoCenter displays ADVISORY #185 (Figure 41). Press button 3 to set inhibit regeneration setting to OFF and continue with the reset regeneration.

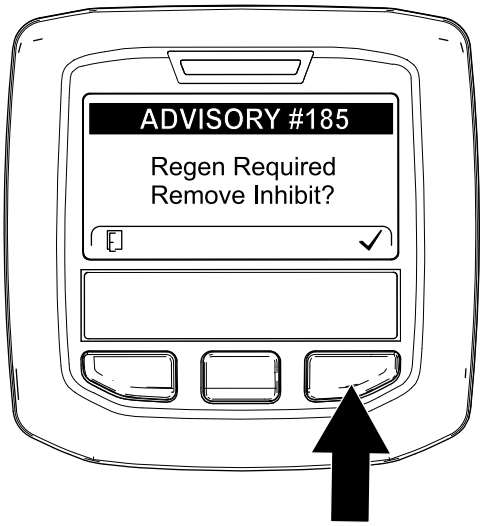


g224394

**Figure 41**

**Note:** If the engine exhaust temperature is too low, the InfoCenter displays ADVISORY #186 (Figure 42) to inform you to set the engine to full throttle (high idle).





g224395

**Figure 42**

**Note:** When the reset regeneration completes, the high exhaust-temperature disappears from the InfoCenter screen.

# Parked or Recovery Regeneration

- When the engine computer requests either a parked regeneration or a recovery regeneration, the regeneration request icon (Figure 43) displays in the InfoCenter.

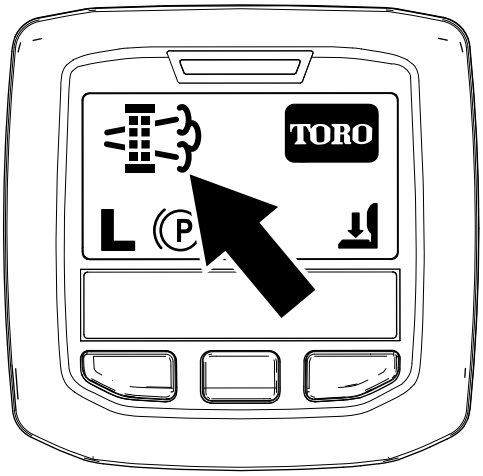


g224404


**Figure 43**

- The machine does not automatically perform a parked regeneration or a recovery regeneration, you must run the regeneration through the InfoCenter.

## Parked Regeneration Messages

When a parked regeneration is requested by the engine computer the following messages display in the InfoCenter:

- Engine warning SPN 3720, FMI 16 (Figure 44)





g213863

**Figure 44**

- Parked regeneration required ADVISORY #188 (Figure 45)

  **Note:** Advisory #188 displays every 15 minutes.





g224397

**Figure 45**

## Recovery Regeneration Messages

When a recovery regeneration is requested by the engine computer, the following messages display in the InfoCenter:


- Engine warning SPN 3719, FMI 0 (Figure 46)




g213867

**Figure 46**

- Recovery regeneration required—power takeoff disabled ADVISORY #191 (Figure 47)





g243798

**Figure 47**

## DPF Status-Limitation


- If the engine computer requests a recovery regeneration or is processing a recovery regeneration and you scroll down to the PARKED REGEN option, parked regeneration locks and the lock icon (Figure 48) appears in the lower right corner of the InfoCenter.




g224625

**Figure 48**

- If the engine computer has not requested a recovery regeneration and you scroll down to the RECOVERY REGEN option, the recovery regeneration locks and the lock icon (Figure 49) appears in the lower right corner of the InfoCenter.




g224628

**Figure 49**

### Preparing to Perform a Parked or Recovery Regeneration

1. Ensure that the machine has fuel in the tank for the type of regeneration you are performing:
   - **Parked Regeneration:** Ensure that you have 1/4 tank of fuel before performing the parked regeneration.
   - **Recovery Regeneration:** Ensure that you have 1/2 tank of fuel before performing the recovery regeneration.
2. Move the machine outside to an area away from combustible materials.
3. Park the machine on a level surface.
4. Ensure that the traction control or motion-control levers are in the NEUTRAL position.
5. If applicable, shut off the PTO, and lower the cutting units or accessories.
6. Engage the parking brake.
7. Set the throttle to the low IDLE position.

### Performing a Parked or Recovery Regeneration


**⚠ CAUTION**

**The exhaust temperature is hot (approximately 600°C (1,112°F) during DPF regeneration. Hot exhaust gas can harm you or other people.**

- **Never operate the engine in an enclosed area.**
- **Make sure that there are no flammable materials around the exhaust system.**
- **Never touch a hot exhaust system component.**
- **Never stand near or around the exhaust pipe of the machine.**

***Important:*** **The computer of the machine cancels DPF regeneration if you increase the engine speed from low idle or release the parking brake.**

1. Access the DPF Regeneration menu, press the center button to scroll down to either the PARKED REGEN START option or the RECOVERY REGEN START option (Figure 50), and press the right button to select the start the regeneration (Figure 50).

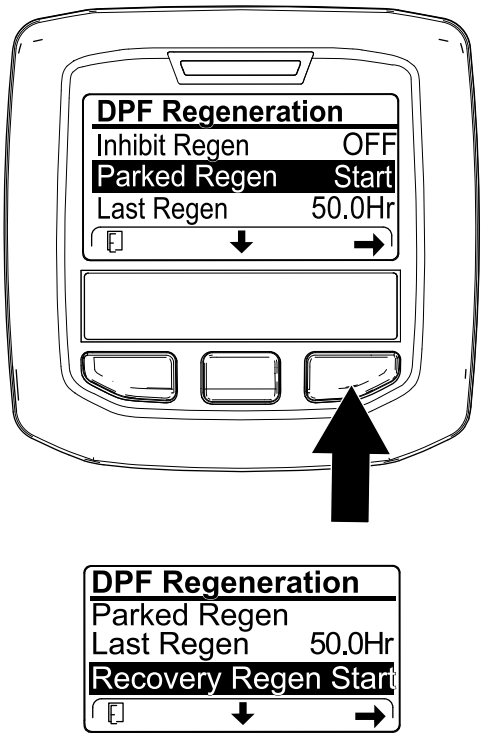



g224402


g224629

**Figure 50**

2. At the VERIFY FUEL LEVEL screen, verify that you have 1/4 tank of fuel if you are performing the parked regeneration or 1/2 tank of fuel if you are performing the recovery regeneration, and press the right button to continue (Figure 51).

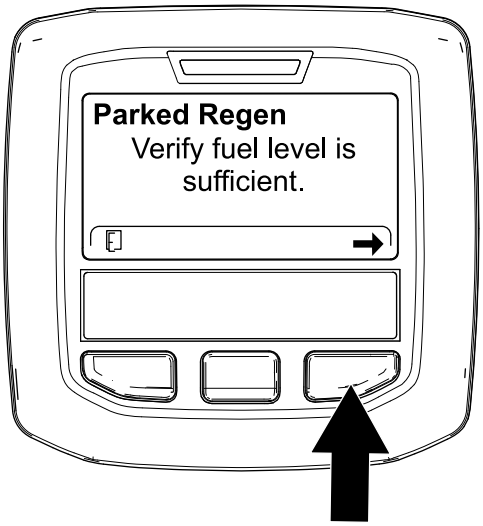



g224414





g227678

**Figure 51**

3. At the DPF checklist screen, verify that the parking brake is engaged and that the engine speed is set to low idle (Figure 52).

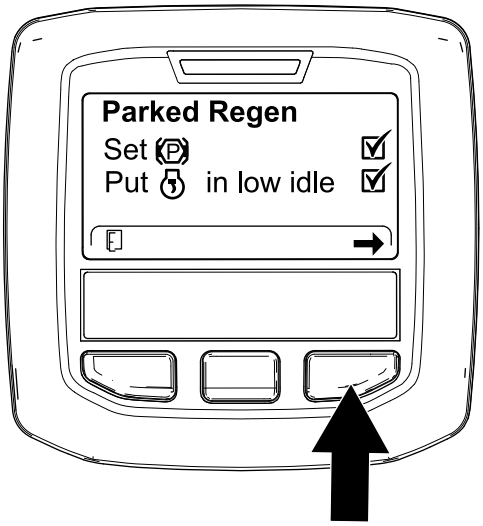



g224407





g227679

**Figure 52**

4. At the INITIATE DPF REGEN screen, press the right button to continue (Figure 53).

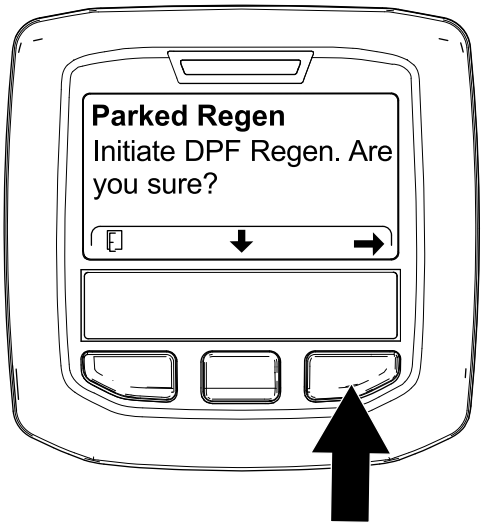



g224626





g224630

**Figure 53**

5. The InfoCenter displays the INITIATING DPF REGEN message (Figure 54).





g224411




g227681

**Figure 54**

6. The InfoCenter displays the time to complete message (Figure 55).

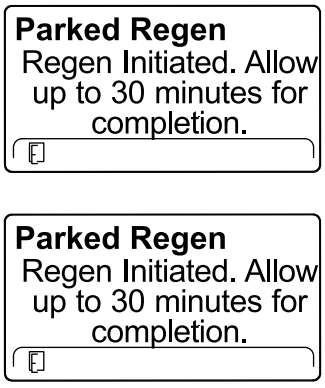


g224406

g224406

**Figure 55**

7. The engine computer checks the engine state and fault information. The InfoCenter may display the following messages found in the table that follows:


## Check Message and Corrective Action Table

| | |
|---|---|
| **Parked Regen**<br>Regen refused: 50 hour limit. | **Corrective Action:** Exit the regeneration menu and run the machine until the time since last regeneration is greater than 50 hours; refer to Time Since Last Regeneration (page 30). |
| **Parked Regen**<br>Regen refused active engine faults.<br>**Recovery Regen**<br>Regen refused active engine faults. | **Corrective Action:** Troubleshoot the engine fault and retry DPF regeneration. |
| **Parked Regen**<br>must be running<br>**Recovery Regen**<br>must be running | **Corrective Action:** Start and run the engine. |
| **Parked Regen**<br>Ensure is running and above 60C/140F.<br>**Recovery Regen**<br>Ensure is running and above 60C/140F. | **Corrective Action:** Run the engine to warm the coolant temperature to 60°C (140°F). |

## Check Message and Corrective Action Table (cont'd.)

| | |
|---|---|
| **Parked Regen**<br>Put in low idle.<br>**Recovery Regen**<br>Put in low idle. | **Corrective Action:** Change the engine speed to low idle. |
| **Parked Regen**<br>Regen refused by ECU.<br>**Recovery Regen**<br>Regen refused by ECU. | **Corrective Action:** Troubleshoot the engine computer condition and retry DPF regeneration. |

8. The InfoCenter displays the home screen and the regeneration acknowledge icon (Figure 56) appears in the lower right corner of the screen as the regeneration processes.





g224403

**Figure 56**

**Note:** While the DPF regeneration runs, the InfoCenter displays the high exhaust-temperature icon .


9. When the engine computer completes a parked or recovery regeneration, the InfoCenter displays ADVISORY #183 (Figure 57). Press the left button to exit to the home screen.

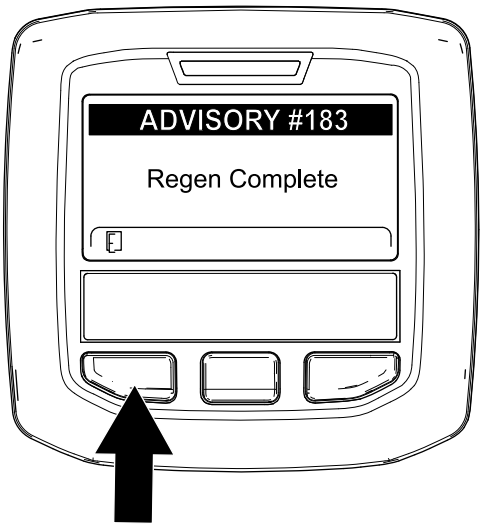


g224392

**Figure 57**

**Note:** If the regeneration fails to complete, the InfoCenter displays Advisory #184 (Figure 57). Press the left button to exit to the home screen.

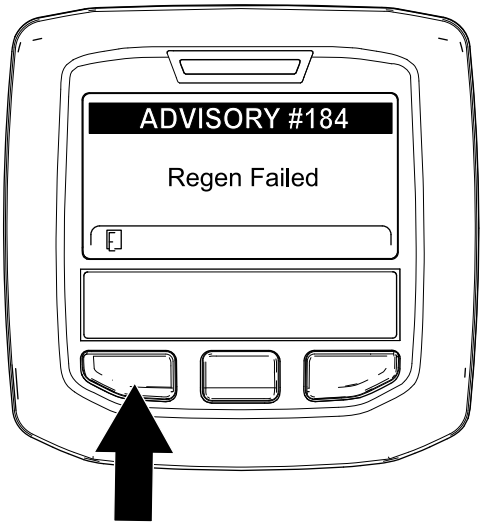



g224393

**Figure 58**

## Canceling a Parked or Recovery Regeneration

Use the Parked Regen Cancel or Recovery Regen Cancel setting to cancel a running parked or recovery regeneration process.


1. Access the DPF Regeneration menu (Figure 59).

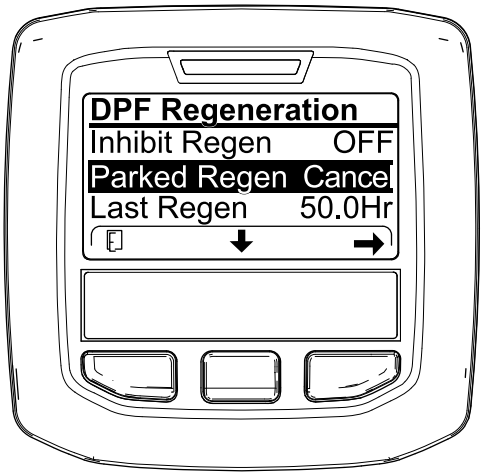


g227305

**Figure 59**

2. Press the center button to scroll down to the PARKED REGEN CANCEL (Figure 59) or the RECOVERY REGEN CANCEL option (Figure 60).

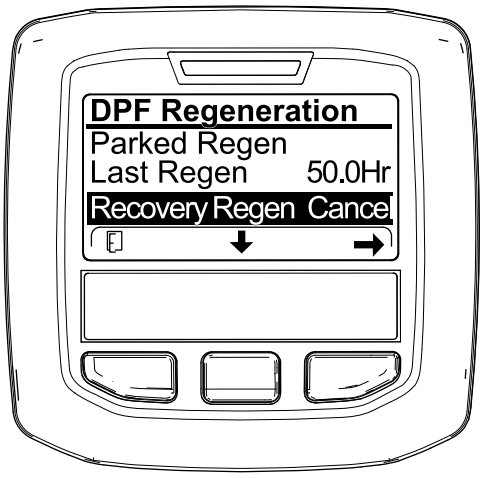


g227306

**Figure 60**

3. Press the right button to select the Regen Cancel entry (Figure 59 or Figure 60).

# Operating Tips

## Fast Throttle Setting/Ground Speed

To maintain enough power for the machine and deck while mowing, operate the engine at the FAST throttle position and adjust your ground speed for conditions. Decrease the ground speed as the load on the cutting blades increase; increase the ground speed as the load on the blades decrease.

## Alternating the Mowing Direction

Alternate your mowing direction to avoid making ruts in the turf, which can appear over time. This also helps to disperse clippings, which enhances decomposition and fertilization.

## Cutting Speed

To improve cut quality, use a slower ground speed in certain conditions.

## Avoiding a Low Cut

If the machine cutting width is wider than the machine that you previously used, raise the cutting height to ensure that uneven turf is not cut too short.

## Select the Proper Height-of-Cut Setting to Suit Conditions

Remove approximately 25 mm (1 inch) or no more than 1/3 of the grass blade when cutting. In exceptionally lush and dense grass, you may need to slow down the forward speed and/or raise the height-of-cut to the next higher setting.

***Important:*** **If you are cutting more than 1/3 of the grass blade, or are mowing in sparse long grass or dry conditions, use the flat sail of the blades to reduce air-borne chaff, debris, and strain on the deck-drive components.**

## Cutting Long Grass

If you allow the grass to grow slightly longer than normal, or if the grass contains a high degree of moisture, raise the cutting height to a higher setting and cut the grass at this setting. Then cut the grass again using the lower, normal setting.

## Keeping the Mower Clean

Clean clippings and dirt from the underside of the mower after each use. If grass and dirt build up inside the mower, cutting quality eventually becomes unsatisfactory.

To reduce the risk of fire hazard, keep the engine, muffler, battery compartment, parking brake, cutting units, and fuel storage compartment free of grass, leaves, or excessive grease. Clean up any spilled oil or fuel.

## Maintaining the Blades

- Maintain sharp blades throughout the cutting season. Sharp blades create a clean cut without tearing or shredding the grass blades. Tearing and shredding causes grass to turn brown at the edges, which slows growth and increases the chance of disease.
- Check the blades daily for sharpness and for any wear or damage. Sharpen the blades as necessary.
- If a blade is damaged or worn, replace it immediately with a genuine Toro replacement blade. Refer to the cutting unit *Operator's Manual* for instructions to replace the blade.

# *After Operation*

# After Operation Safety

- Clean grass and debris from the cutting units, mufflers, and engine compartment to help prevent fires. Clean up oil or fuel spills.
- If the cutting units are in the transport position, use the positive mechanical lock (if available) before you leave the machine unattended.
- Allow the engine to cool before storing the machine in any enclosure.
- Remove the key and shut off the fuel (if equipped) before storing or transporting the machine.
- Never store the machine or fuel container where there is an open flame, spark, or pilot light, such as on a water heater or on other appliances.
- Keep all parts of the machine in good working condition and all hardware tightened, especially blade-attachment hardware.
- Replace all worn or damaged decals.

# Pushing the Machine

In an emergency, you can move the machine a very short distance by actuating the bypass valves in the hydraulic pump and pushing the machine.

***Important:*** **Always push the machine by hand and never a long distance. Never tow the machine, because damage to the hydraulic system may occur.**

***Important:*** **The bypass valves must be open whenever you push or tow the machine. Close the valves once you have pushed or towed the machine to the desired location.**

1. Lift the seat; refer to Unlatching the Seat (page 20)
2. Locate the bypass valves (Figure 61) and rotate each bypass valve counterclockwise 1 turn.

   **Note:** This allows hydraulic fluid to bypass the pump, enabling the wheels to turn.

   ***Important:*** **Do not rotate the bypass valves more than 1 turn. This prevents valves from coming out of the body and causing fluid to run out.**

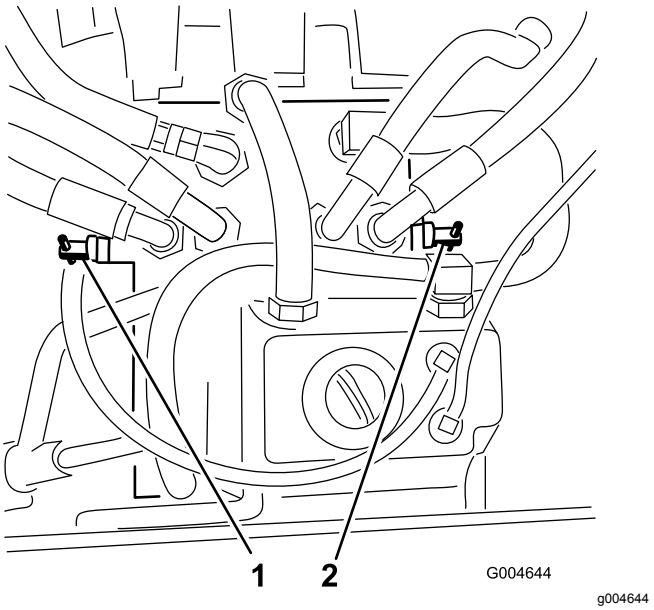



**Figure 61**

1. Right bypass valve
2. Left bypass valve

3. Ensure that the parking brake is disengaged and push the machine to the desired location.
4. Close the valves by rotating each valve 1 clockwise turn (Figure 61).

   **Note:** Do not overtighten the valves.
5. Torque the valves to approximately 8 N·m (71 in-lb).

   ***Important:*** **Ensure that the bypass valves are closed before you start the engine. Running the engine with open bypass valves causes the transmission to overheat.**

# Transporting the Machine

Use a heavy-duty trailer or truck to transport the machine. Ensure that the trailer or truck has all the necessary brakes, lighting, and marking as required by law. Please carefully read all the safety instructions. Knowing this information could help you, your family, pets, or bystanders avoid injury.

**⚠ WARNING**

**Driving on the street or roadway without turn signals, lights, reflective markings, or a slow-moving-vehicle emblem is dangerous and can lead to accidents causing personal injury.**

**Do not drive the machine on a public street or roadway.**

1. If you are using a trailer, connect it to the towing vehicle, and connect the safety chains.
2. If applicable, connect the trailer brakes.
3. Load the machine onto the trailer or truck.
4. Shut off the engine, remove the key, engage the parking brake, and close the fuel valve.
5. Use the tie-down loops on the machine to securely fasten it to the trailer or truck with straps, chains, cable, or ropes (Figure 62).

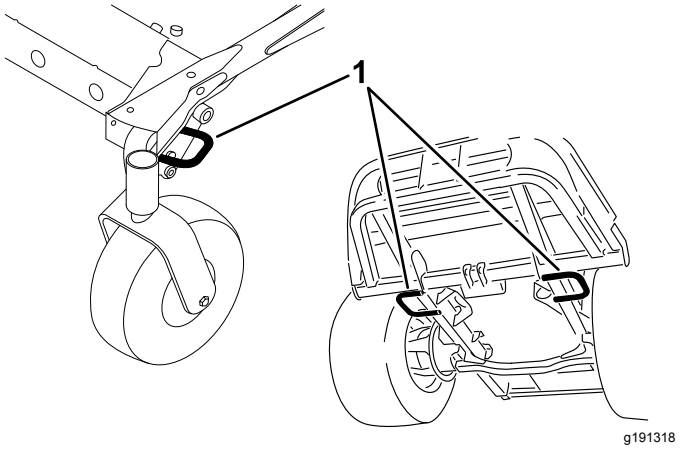



**Figure 62**

1. Traction unit tie-down loops

# Loading the Machine

Use extreme caution when loading or unloading machines onto a trailer or a truck. Use a full-width ramp that is wider than the machine for this procedure. Drive the machine up ramps in reverse and drive it down ramps in a forward direction (Figure 63).

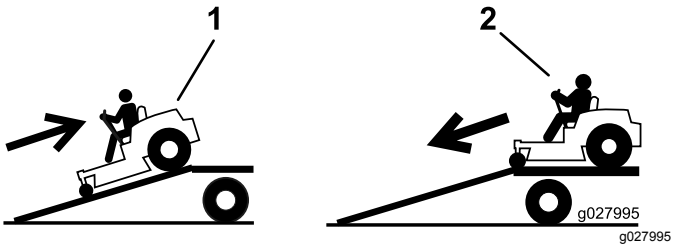



Figure 63

1. Drive the machine up the ramp in reverse.
2. Drive the machine forward down the ramp.

***Important:*** **Do not use narrow individual ramps for each side of the machine.**

**⚠ WARNING**

**Loading the machine onto a trailer or truck increases the possibility of tipover and could cause serious injury or death.**

- **Use extreme caution when operating a machine on a ramp.**
- **When loading or unloading the machine, use the seat belt and ensure that the roll bar is in the raised position. Ensure that the roll bar can clear the top of an enclosed trailer.**
- **Use only a full-width ramp; do not use individual ramps for each side of the machine.**
- **Do not exceed a 15° angle between the ramp and the ground, or between the ramp and the trailer or truck.**
- **Ensure that the ramp length is at least 4 times as long as the height of the trailer or truck bed to the ground. This ensures that the ramp angle does not exceed 15° on flat ground.**
- **Drive the machine up ramps in reverse and drive it down ramps in a forward direction.**
- **While driving the machine on a ramp, avoid sudden acceleration or deceleration, as this could cause a loss of control or a tipover situation.**

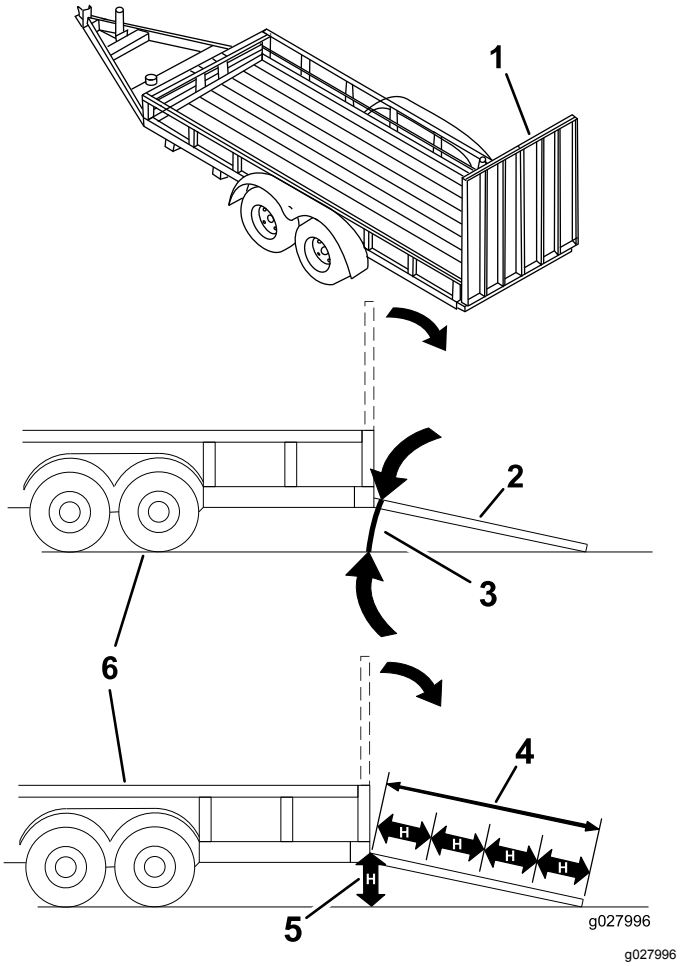



Figure 64

1. Full-width ramp in stowed position
2. Side view of full-width ramp in loading position
3. Not greater than 15°
4. Ramp is at least 4 times as long as the height of the trailer or truck bed to the ground
5. “H” indicates the height of the trailer or truck bed to the ground.
6. Trailer

# Maintenance

**Note:** Determine the left and right sides of the machine from the normal operating position.

***Important:*** **Refer to your engine owner's manual for additional maintenance procedures.**

**Note:** Download a free copy of the electrical or hydraulic schematic by visiting www.Toro.com and searching for your machine from the Manuals link on the home page.

## Recommended Maintenance Schedule(s)

| Maintenance Service Interval | Maintenance Procedure |
|---|---|
| After the first 10 hours | • Torque the frame-mounting bolts.<br>• Torque the wheel lug nuts. |
| After the first 50 hours | • Change the mower-deck gearbox lubricant. |
| After the first 200 hours | • Change the hydraulic fluid and filter. |
| Before each use or daily | • Test the safety-interlock system.<br>• Check the engine-oil level.<br>• Check the engine coolant level.<br>• Clean the radiator with compressed air (more often in dirty and dusty conditions).<br>• Check the hydraulic fluid level.<br>• Clean the mower deck. |
| Every 50 hours | • Grease the bearing and bushing grease fittings (more often in dirty or dusty conditions and after every washing).<br>• Check battery cable connections.<br>• Check the tire pressure. |
| Every 100 hours | • Check the alternator-belt tension. |
| Every 150 hours | • Check the lubricant in the mower-deck gearbox. |
| Every 200 hours | • Inspect the cooling-system hoses and seals. Replace them if cracked or torn.<br>• Torque the wheel lug nuts. |
| Every 250 hours | • Change the engine oil and filter. |
| Every 400 hours | • Change the mower-deck gearbox lubricant.<br>• Service the air-cleaner filter. Service it also when the air-cleaner indicator shows red; service the air-cleaner filter more frequently in extremely dusty or dirty conditions.<br>• Service the air cleaner.<br>• Replace the engine fuel filter.<br>• Replace the fuel-filter canister for the water separator.<br>• Drain water or other contaminants from the water separator.<br>• Check the fuel lines and connections. |
| Every 800 hours | • Change the hydraulic fluid and filter.<br>• Inspect the engine-valve clearance. Refer to your engine owner's manual. |
| Every 1,500 hours | • Replace moving hoses. |
| Every 6,000 hours | • Disassemble, clean, and assemble the soot filter of the DPF. or clean the soot filter if engine faults SPN 3720 FMI 16, SPN 3720 FMI 0, or SPN 3720 FMI 16 display in the InfoCenter. |
| Every 2 years | • Drain and clean the fuel tank.<br>• Flush and replace the cooling-system fluid. |

# Daily Maintenance Checklist

Duplicate this page for routine use.

| Maintenance Check Item | For the week of: | | | | | | |
|---|---|---|---|---|---|---|---|
| | Mon. | Tues. | Wed. | Thurs. | Fri. | Sat. | Sun. |
| Check the safety-interlock operation. | | | | | | | |
| Check the grass deflector in the down position (if applicable). | | | | | | | |
| Check the parking-brake operation. | | | | | | | |
| Check the fuel level. | | | | | | | |
| Check the hydraulic fluid level. | | | | | | | |
| Check the engine-oil level. | | | | | | | |
| Check the cooling-system fluid level. | | | | | | | |
| Check the drain water/fuel separator. | | | | | | | |
| Check the air-filter restriction indicator.[1] | | | | | | | |
| Check the radiator and screen for debris | | | | | | | |
| Check for unusual engine noises.[2] | | | | | | | |
| Check for unusual operating noises. | | | | | | | |
| Check the hydraulic hoses for damage | | | | | | | |
| Check for fluid leaks. | | | | | | | |
| Check the tire pressure. | | | | | | | |
| Check the instrument operation. | | | | | | | |
| Check the condition of the blades. | | | | | | | |
| Lubricate all grease fittings.[3] | | | | | | | |
| Touch up damaged paint. | | | | | | | |

1. If the indicator shows red
2. Check glow plug and injector nozzles if you notice hard starting, excess smoke, or rough running.
3. Immediately after every washing, regardless of the interval listed.

| Notation for areas of concern | | |
|---|---|---|
| Inspection performed by: | | |
| Item | Date | Information |
| | | |
| | | |
| | | |
| | | |
| | | |

**⚠ CAUTION**

**If you leave the key in the ignition switch, someone could accidently start the engine and seriously injure you or other bystanders.**

**Remove the key from the ignition before you do any maintenance.**

# Pre-Maintenance Procedures

***Important:*** **The fasteners on the covers of this machine are designed to remain on the cover after removal. Loosen all of the fasteners on each cover a few turns so that the cover is loose but still attached, then go back and loosen them until the cover comes free. This will prevent you from accidentally stripping the bolts free of the retainers.**

## Maintenance Safety

- Before adjusting, cleaning, repairing, or leaving the machine, do the following:
  - Park the machine on a level surface.
  - Move the throttle switch to the low-idle position.
  - Disengage the cutting units.
  - Lower the cutting units.
  - Ensure that the traction is in neutral.
  - Engage the parking brake.
  - Shut off the engine and remove the key.
  - Wait for all moving parts to stop.
  - Allow machine components to cool before performing maintenance.
- If the cutting units are in the transport position, use the positive mechanical lock (if available) before you leave the machine unattended.
- If possible, do not perform maintenance while the engine is running. Keep away from moving parts.
- Use jack stands to support the machine or components when required.
- Carefully release pressure from components with stored energy.

# Lubrication

## Greasing the Bearings and Bushings

**Service Interval:** Every 50 hours (more often in dirty or dusty conditions and after every washing).

The machine has grease fittings that you must lubricate regularly with No. 2 lithium grease. Lubricate more often in dirty or dusty conditions because dirt can get into the bearings and bushings and cause accelerated wear.

1. Wipe the grease fittings clean so that foreign matter cannot be forced into the bearing or bushing.
2. Pump grease into the fittings.
3. Wipe off excess grease.

**Note:** Improper wash-down procedures can negatively affect bearing life. Do not wash down the machine when it is still hot and avoid directing high-pressure or high-volume spray at the bearings or seals.

## Servicing the Mower-Deck Gearbox Lubricant

The gear box is designed to operate with SAE EP90W gear lube. Although the gearbox comes from the factory with lubricant, check the level of the lubricant in the cutting unit before operating it and as recommended in the Daily Maintenance Checklist (page 43).

### Checking the Mower-Deck Gearbox Lubricant

**Service Interval:** Every 150 hours

1. Position the machine and mower deck on a level surface.
2. Lower the mower deck to the 2.5 cm (1 inch) height of cut.
3. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.

4. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
5. Lift the footrest, exposing the top of the mower deck.
6. Remove the dipstick/fill plug from the top of the gearbox and make sure that the lubricant is between the marks on the dipstick (Figure 65).

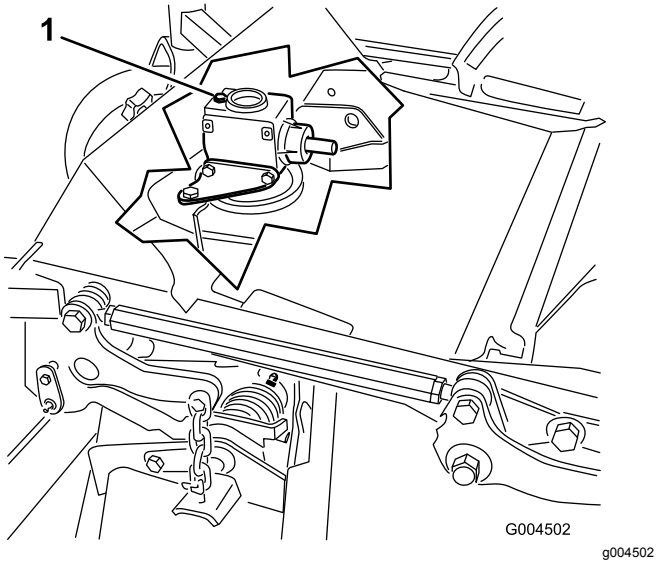



**Figure 65**

1. Fill plug and dipstick

7. If the lubricant level is low, add enough lubricant until the level is between the marks on the dipstick.

   ***Important:*** **Do not overfill the gearbox; overfilling the gearbox may damage it.**

## Changing the Mower-Deck Gearbox Lubricant

**Service Interval:** After the first 50 hours

Every 400 hours

1. Position the machine and cutting unit on a level surface.
2. Lower the mower deck to the 2.5 cm (1 inch) height of cut.
3. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
4. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
5. Lift the footrest, exposing the top of the mower deck.
6. Remove the dipstick/fill plug from the top of the gearbox (Figure 65).
7. Place a funnel and drain pan under the drain plug located under the front of the gearbox and remove the plug, draining the lubricant into the pan.
8. Replace the drain plug.
9. Add enough lubricant, approximately 283 ml (12 fl oz), until the level is between the marks on the dipstick.

   ***Important:*** **Do not overfill the gearbox; overfilling the gearbox may damage it.**

# Engine Maintenance

## Engine Safety

- Shut off the engine and remove the key before checking the oil or adding oil to the crankcase.
- Do not change the governor speed or overspeed the engine.

## Checking the Air Cleaner

**Service Interval:** Every 400 hours Service it also when the air-cleaner indicator shows red; service the air-cleaner filter more frequently in extremely dusty or dirty conditions.

1. Check the air-cleaner body for damage, which could possibly cause an air leak. Replace a damaged air-cleaner body.
2. Check the air-intake system for leaks, damage, or loose hose clamps.
3. Service the air-cleaner filter (Figure 66).

   ***Important:*** **Do not over-service the air filter.**

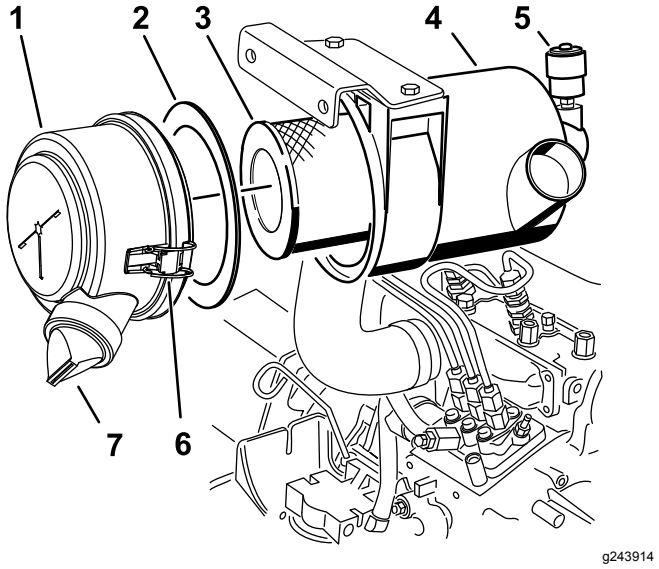



**Figure 66**

1. Air-cleaner cover
2. Gasket
3. Filter
4. Air-cleaner body
5. Air-cleaner indicator
6. Air-cleaner latch
7. Rubber outlet valve

4. Be sure that the cover is seated correctly and seals with the air-cleaner body.

## Servicing the Air Cleaner

**Service Interval:** Every 400 hours

**Note:** If the foam gasket in the cover is damaged, replace it.

***Important:*** **Avoid using high-pressure air, which could force dirt through the filter into the intake tract.**

***Important:*** **Do not clean the used filter to avoid damage to the filter media.**

***Important:*** **Do not use a damaged filter.**

***Important:*** **Do not apply pressure to the flexible center of the filter.**

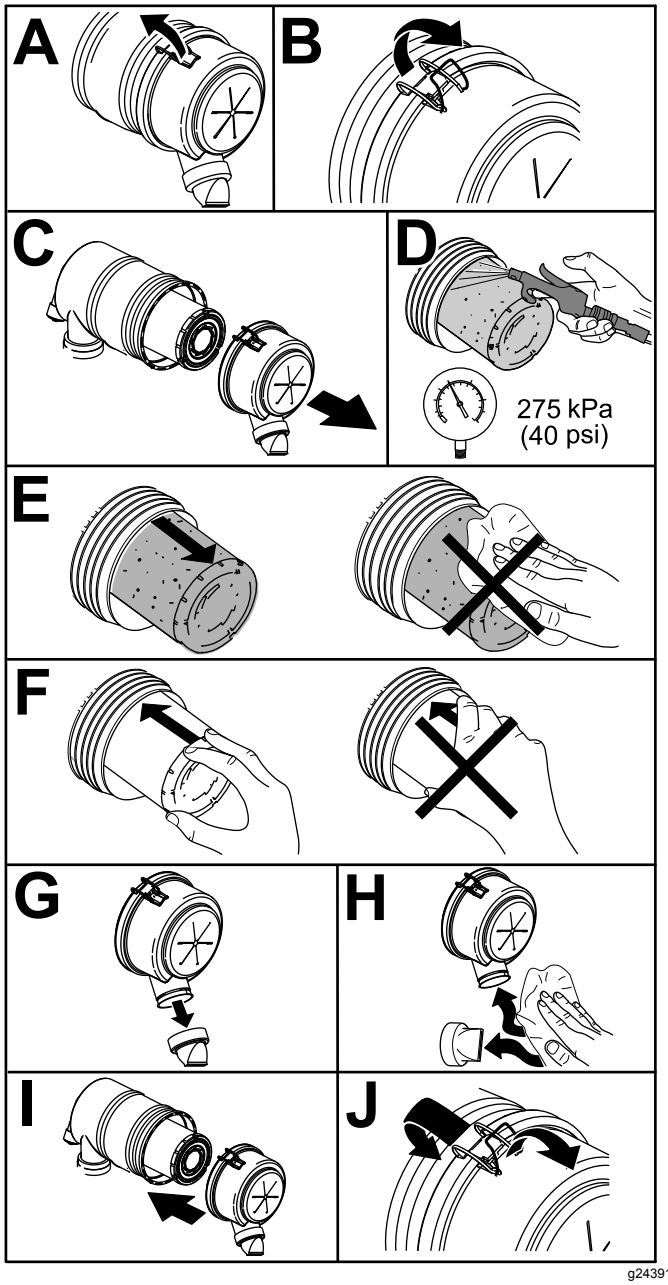



**Figure 67**

# Servicing the Engine Oil

## Oil Specification

Use high-quality, low-ash engine oil that meets or exceeds the following specifications:

- API service category CJ-4 or higher
- ACEA service category E6
- JASO service category DH-2

***Important:*** **Using engine oil other than API CJ-4 or higher, ACEA E6, or JASO DH-2 may cause the diesel particulate filter to plug or cause engine damage.**

Use the following engine oil viscosity grade:

- Preferred oil: SAE 15W-40 (above 0°F)
- Alternate oil: SAE 10W-30 or 5W-30 (all temperatures)

Toro Premium Engine Oil is available from your Authorized Toro Distributor in either 15W-40 or 10W-30 viscosity grades. See the parts catalog for part numbers.

## Checking the Engine-Oil Level

**Service Interval:** Before each use or daily

The engine is shipped with oil in the crankcase; however, the oil level must be checked before and after the engine is first started.

***Important:*** **Check the engine oil daily. If the engine-oil level is above the Full mark on the dipstick, the engine oil may be diluted with fuel; If the engine oil level is above the Full mark, change the engine oil.**

The best time to check the engine oil is when the engine is cool before it has been started for the day. If it has already been run, allow the oil to drain back down to the sump for at least 10 minutes before checking. If the oil level is at or below the Add mark on the dipstick, add oil to bring the oil level to the Full mark. **Do not overfill the engine with oil**.

***Important:*** **Keep the engine oil level between the upper and lower limits on the dipstick; the engine may fail if you run it with too much or too little oil.**

1. Park the machine on a level surface.
2. Unlock the hood latches and open the hood.
3. Remove the dipstick, wipe it clean, install the dipstick into the tube, and pull it out again.

   The oil level should be in the safe range (Figure 68).

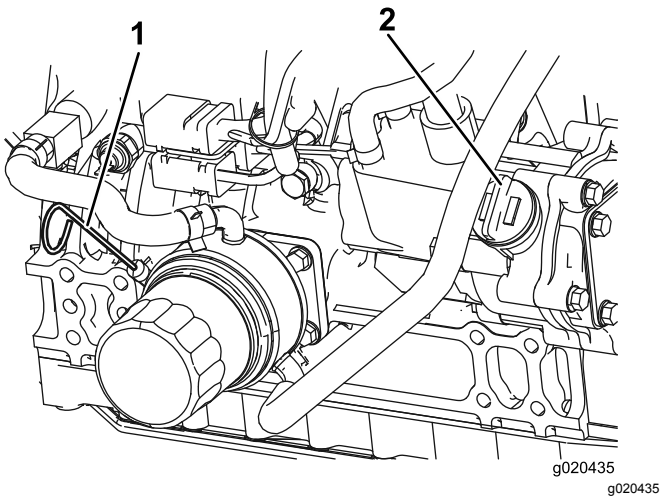



**Figure 68**

1. Dipstick
2. Oil-fill cap

4. If the oil is below the safe range, remove the fill cap (Figure 68) and add oil until the level reaches the Full mark.

   ***Important:*** **Do not overfill the engine with oil.**

   **Note:** When using different oil, drain all old oil from the crankcase before adding new oil.
5. Install the oil-fill cap and dipstick.
6. Close the hood and secure it with the latches.


## Crankcase Oil Capacity

5.2 liters (5.5 qt) with the filter.

## Changing the Engine Oil and Filter

**Service Interval:** Every 250 hours

1. Remove the oil-drain plug (Figure 69) and let the oil flow into a drain pan. When all the oil is drained, install the drain plug.

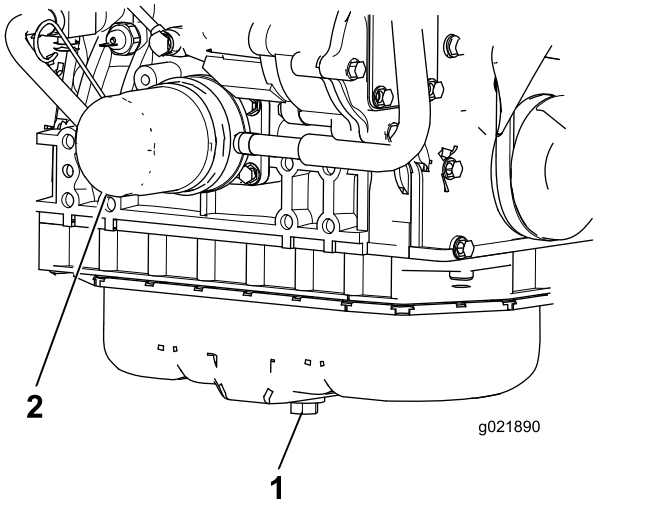


g021890

**Figure 69**


1. Oil-drain plug
2. Oil filter

2. Remove the oil filter (Figure 69). Apply a light coat of clean oil to the new filter seal before screwing it on. **Do not overtighten.**
3. Add oil to the crankcase; refer to Checking the Engine-Oil Level (page 47).

# Servicing the Diesel-Oxidation Catalyst (DOC) and the Soot Filter

**Service Interval:** Every 6,000 hours or clean the soot filter if engine faults SPN 3720 FMI 16, SPN 3720 FMI 0, or SPN 3720 FMI 16 display in the InfoCenter.

- If advisory message ADVISORY 179 displays in the InfoCenter, the DPF is nearing the recommended point for servicing the diesel-oxidation catalyst and the soot filter.




g213865

**Figure 70**

- If engine faults CHECK ENGINE SPN 3251 FMI 0, CHECK ENGINE SPN 3720 FMI 0, or CHECK ENGINE SPN 3720 FMI 16in the InfoCenter (Figure 71) display in the InfoCenter, clean the soot filter using the steps that follow:

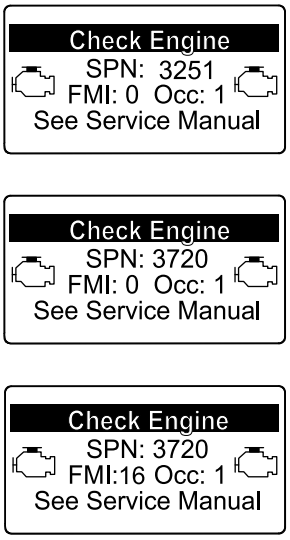



**Figure 71**

1. Refer to the Engine section in the *Service Manual* for information on disassembling and assembling the diesel-oxidation catalyst and the soot filter of the DPF.
2. Refer to your Authorized Toro Distributor for diesel-oxidation catalyst and the soot filter replacement parts or service.
3. Contact your Authorized Toro Distributor to have them reset the engine ECU after you install a clean DPF.

# Fuel System Maintenance

**Note:** Refer to Fuel Specification (page 15) for proper fuel recommendations.

**⚠ DANGER**

**Under certain conditions, diesel fuel and fuel vapors are highly flammable and explosive. A fire or explosion from fuel can burn you and others and can cause property damage.**


- **Use a funnel and fill the fuel tank outdoors, in an open area, when the engine is off and is cold. Wipe up any fuel that spills.**
- **Do not fill the fuel tank completely full. Add fuel to the fuel tank until the level is to the bottom of the filler neck.**
- **Never smoke when handling fuel, and stay away from an open flame or where fuel fumes may be ignited by a spark.**
- **Store fuel in a clean, safety-approved container and keep the cap in place.**

## Servicing the Engine Fuel Filter

**Service Interval:** Every 400 hours

The engine fuel filter should be replaced after every 400 hours of operation.

1. Clean the area around the fuel filter head (Figure 72).

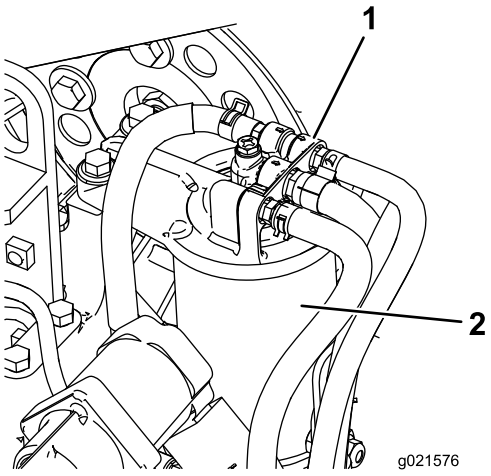


g021576

**Figure 72**


1. Fuel Filter head
2. Fuel Filter

2. Remove the filter and clean the filter head mounting surface (Figure 72).
3. Lubricate the filter gasket with clean lubricating engine oil. Refer to the Engine Operator's Manual, included with the machine, for additional information.
4. Install the dry filter canister, by hand, until the gasket contacts the filter head, then rotate it an additional 1/2 turn.
5. Start the engine and check for fuel leaks around the filter head.

## Servicing the Water Separator

**Service Interval:** Every 400 hours

Every 400 hours

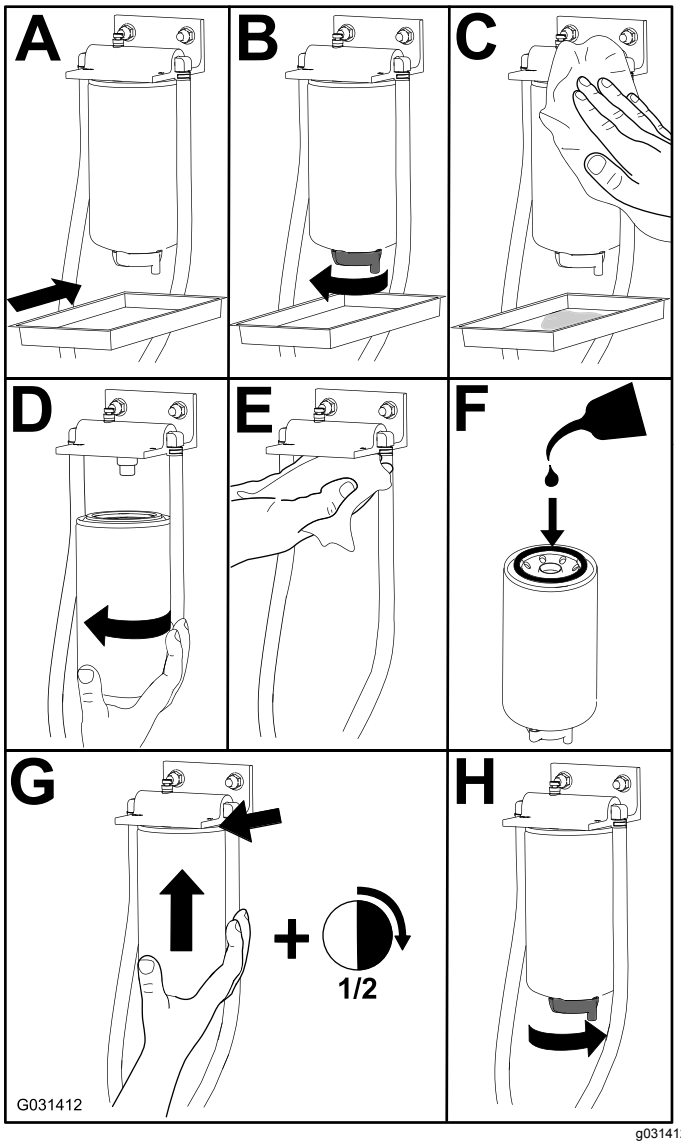


g031412

**Figure 73**

## Cleaning the Fuel Tank

**Service Interval:** Every 2 years

Remove and clean the in-line strainers after draining the tank. Use clean diesel fuel to flush out the tank.

***Important:*** **Drain and clean the tank if the fuel system becomes contaminated or if you are storing the machine for an extended period.**

## Checking the Fuel Lines and Connections

**Service Interval:** Every 400 hours

Inspect the fuel lines for deterioration, damage, chaffing, or loose connections.

# *Electrical System Maintenance*

## Electrical System Safety

**WARNING**

**CALIFORNIA**
**Proposition 65 Warning**

**Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Wash hands after handling.**

- Disconnect the battery before repairing the machine. Disconnect the negative terminal first and the positive last. Connect the positive terminal first and the negative last.
- Charge the battery in an open, well-ventilated area, away from sparks and flames. Unplug the charger before connecting or disconnecting the battery. Wear protective clothing and use insulated tools.

## Servicing the Battery

**Service Interval:** Every 50 hours

Keep the top of the battery clean. If you store the machine in a location where temperatures are extremely high, the battery will run down more rapidly than if the machine is stored in a location where the temperature is cool.

Keep the top of the battery clean by washing it periodically with a brush dipped in ammonia or bicarbonate of soda solution. Flush the top surface with water after cleaning it. Do not remove the fill caps while cleaning the battery.

The battery cables must be tight on the terminals to provide good electrical contact.

If corrosion occurs at the terminals, disconnect the cables, negative (-) cable first, and scrape the clamps and terminals separately. Connect the cables, positive (+) cable first, and coat the terminals with petroleum jelly.

**⚠ WARNING**

**Battery terminals or metal tools could short against metal machine components causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.**

- **When removing or installing the battery, do not allow the battery terminals to touch any metal parts of the machine.**
- **Do not allow metal tools to short between the battery terminals and metal parts of the machine.**

**⚠ WARNING**

**Incorrect battery cable routing could damage the machine and cables causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.**

- **Always disconnect the negative (black) battery cable before disconnecting the positive (red) cable.**
- **Always connect the positive (red) battery cable before connecting the negative (black) cable.**

# Storing the Battery

If you are storing the machine more than 30 days, remove the battery and charge it fully. Either store it on a shelf or on the machine. Do not connect the cables if you store it on the machine. Store the battery in a cool environment to prevent the battery from discharging rapidly. To prevent the battery from freezing, make sure it is fully charged. The specific gravity of a fully charged battery is 1.265 to 1.299.


# Checking the Fuses

The fuses are located under the control panel. Access them through the side panel cover (Figure 74). To open the side panel cover, release the 2 latches and pull out on it.

If the machine stops or has other electrical system issues, check the fuses. Grasp each fuse in turn and remove them 1 at a time, checking if any are blown.

***Important:*** **If you need to replace a fuse, always use the same type and amperage-rated fuse as the one you are replacing, otherwise you could damage the electrical system. Refer to the decal next to the fuses for a diagram of each fuse and its amperage (Figure 75).**

**Note:** If a fuse blows frequently, you may have a short in the electrical system and should have it serviced by a qualified service technician.

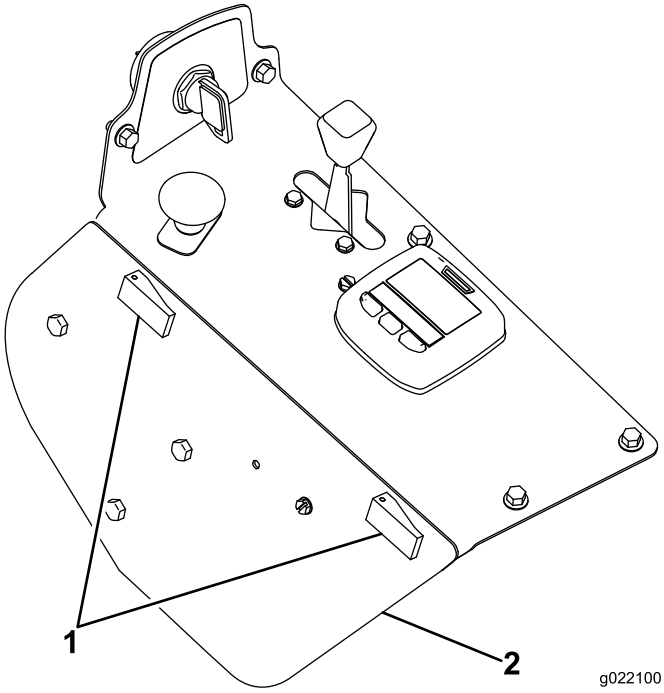



g022100

g022100

**Figure 74**

1. Side panel cover
2. Latch

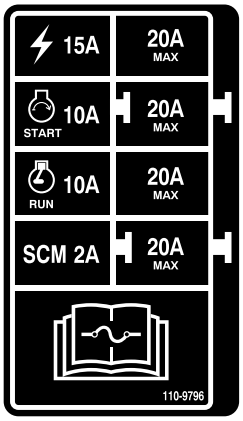


decal110-9796nc

**Figure 75**

# Drive System Maintenance

## Checking the Tire Pressure

**Service Interval:** Every 50 hours/Monthly (whichever comes first)

Maintain the air pressure in the front and rear tires (Figure 76). The correct air pressure is 124 kPa (15 psi) in the rear tires and 103 kPa (25 psi) in the caster wheels. Uneven tire pressure can cause an uneven cut.

**Note:** Check the tires when they are cold to get the most accurate pressure reading.

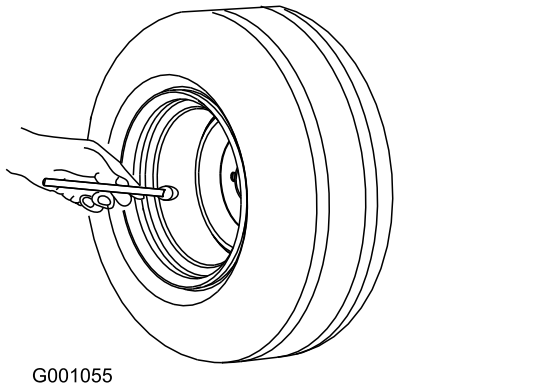



**Figure 76**

## Replacing the Caster Wheels and Bearings

1. Obtain a new caster-wheel assembly, cone bearings, and bearing seals from your Authorized Toro Distributor.
2. Remove the locknut from the bolt (Figure 77).

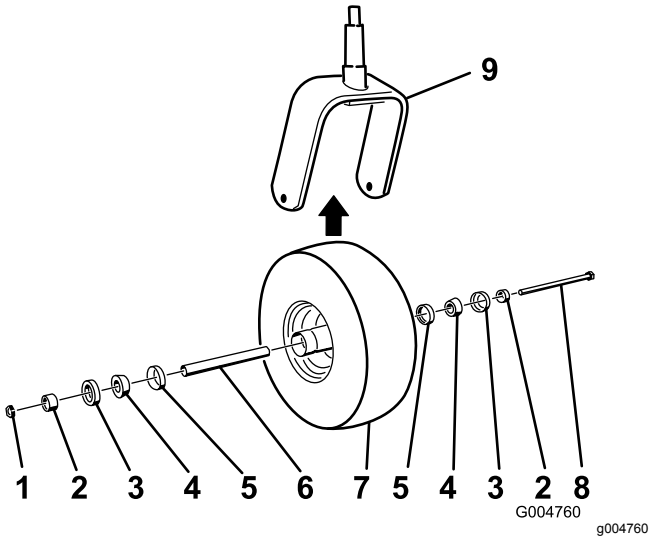



**Figure 77**

1. Locknut
2. Bearing spacer
3. Outer bearing seal
4. Cone bearing
5. Inner bearing seal
6. Spacer
7. Caster wheel
8. Axle bolt
9. Caster fork

3. Grasp the caster wheel and slide the bolt out of the fork or pivot arm.
4. Discard the old caster wheel and bearings.
5. Assemble the caster wheel by pushing the cone bearings and seals, packed with grease, into the wheel hub, positioned as shown in Figure 77.
6. Slide the spacer into the wheel hub through the bearings, captivating the spacer inside the wheel hub with 2 bearing spacers.

   ***Important:*** **Ensure that the seal lips are not folded inward.**
7. Install the caster-wheel assembly between the castor fork and secure it in place with the bolt and locknut.
8. Tighten the locknut until the wheel no longer spins freely, then back it off just until the wheel spins freely.
9. Attach a grease gun to the grease fitting on the caster wheel and fill it with No. 2 lithium grease.

# *Cooling System Maintenance*

## Cooling System Safety

- Swallowing engine coolant can cause poisoning; keep out of reach from children and pets.
- Discharge of hot, pressurized coolant or touching a hot radiator and surrounding parts can cause severe burns.
  - Always allow the engine to cool at least 15 minutes before removing the radiator cap.
  - Use a rag when opening the radiator cap, and open the cap slowly to allow steam to escape.
- Do not operate the machine without the covers in place.
- Keep your fingers, hands and clothing clear of rotating fan and drive belt.
- Shut off the engine and remove the key before performing maintenance.


## Checking the Cooling System

**Service Interval:** Before each use or daily

The cooling system is filled with a 50/50 solution of water and permanent ethylene glycol anti freeze. The capacity of the cooling system is 7.5 L (6 US qt).

1. Check the level of the coolant in the expansion tank (Figure 78).

   **Note:** The coolant level should be between the marks on the side of the tank.

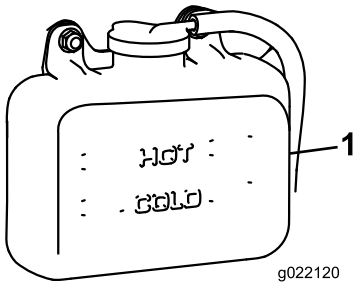


g022120

**Figure 78**

1. Expansion tank

2. If coolant level is low, remove the expansion-tank cap and replenish the system.

   ***Important:*** **Do not overfill.**

3. Install the expansion-tank cap.

## Cleaning the Radiator

**Service Interval:** Before each use or daily

Every 1,500 hours—Replace moving hoses.

Every 200 hours—Inspect the cooling-system hoses and seals. Replace them if cracked or torn.

Every 2 years—Flush and replace the cooling-system fluid.

Clean the radiator to prevent the engine from overheating.

**Note:** If the mower deck or engine shuts off due to overheating, check the radiator for excessive buildup of debris.

Clean the radiator as follows:

1. Open the hood.
2. Working from the fan side of the radiator, blow out debris with low pressure (345 kPa or 50 psi), compressed air. Repeat from the front of the radiator and the other fan side.

   ***Important:*** **Do not use water.**

3. After you thoroughly clean the radiator, clean out debris that may have collected in the channel at the radiator base.
4. Close the hood.

# Brake Maintenance

## Adjusting the Parking-Brake Interlock Switch

1. Stop the machine, move the motion-control levers to the NEUTRAL-LOCK position, engage the parking brake, and remove the ignition key.
2. Remove the bolts securing the front panel and remove the panel (Figure 79).

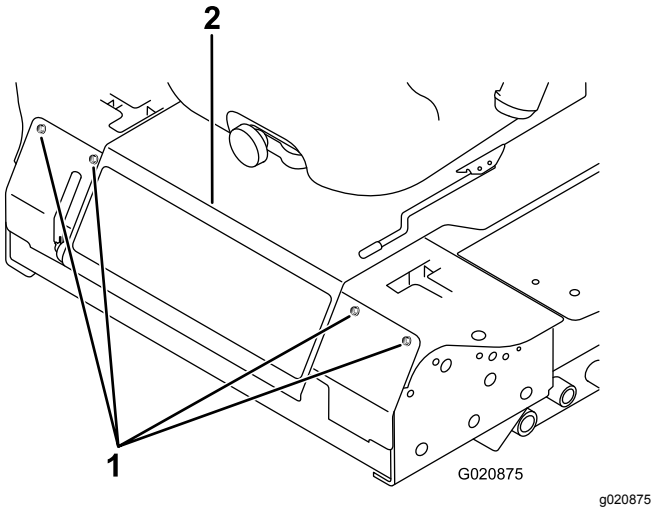



**Figure 79**

1. Bolt
2. Control panel

3. Loosen the 2 jam nuts securing the parking-brake interlock switch to the mounting bracket.

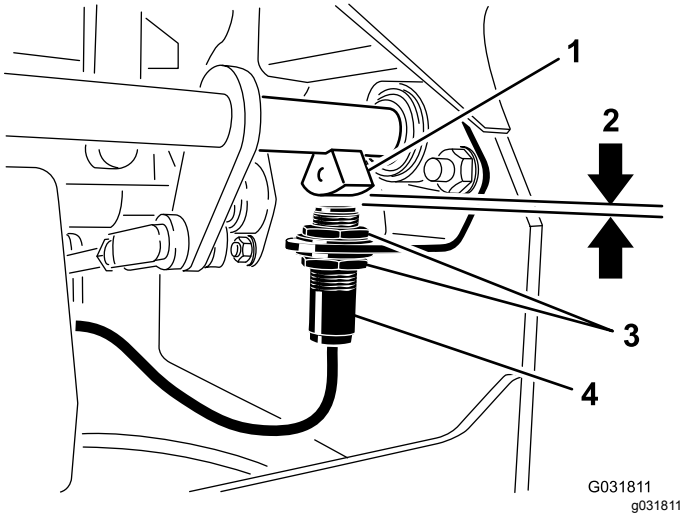



**Figure 80**

1. Brake-shaft sensor
2. 4 mm (5/32 inch)
3. Jam nut
4. Parking-brake interlock switch

4. Move the switch up or down on the bracket until the distance between the brake-shaft sensor and the switch plunger is 4 mm (5/32 inch) as shown in Figure 80.

   **Note:** Make sure that the brake-shaft sensor does not contact the switch plunger.
5. Secure the switch jam nuts.
6. Test the adjustment as follows:
   A. Ensure that the parking brake is engaged and you are not sitting on the seat, then start the engine.
   B. Move the control levers out of the NEUTRAL-LOCK position.


      **Note:** The engine should shut off. If not, check the adjustment that you made to the switch.
7. Install the front panel.

# Belt Maintenance

## Checking the Alternator-Belt Tension

**Service Interval:** Every 100 hours

1. Apply 44 N (10 lb) of force to the alternator belt, midway between the pulleys.
2. If the deflection is not 10 mm (3/8 inch), loosen the alternator mounting bolts (Figure 81).

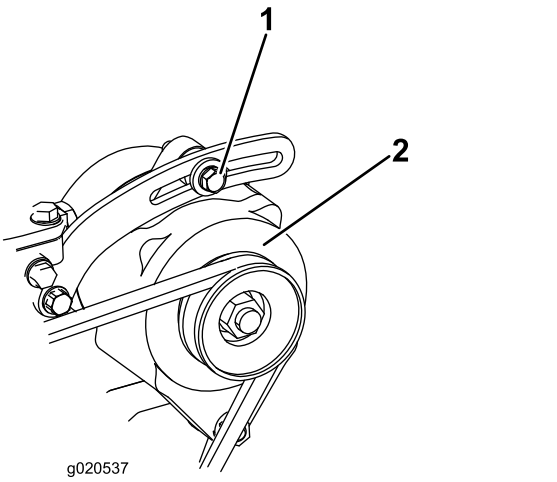


g020537

**Figure 81**


1. Mounting bolt
2. Alternator

3. Increase or decrease the alternator-belt tension.
4. Tighten the mounting bolts.
5. Check the deflection of the belt again to ensure that the tension is correct.

# Controls System Maintenance

## Adjusting the Control-Lever Neutral-Interlock Switch

1. Stop the machine, move the motion-control levers to the NEUTRAL-LOCK position, engage the parking brake, and remove the ignition key.
2. Remove the bolts securing the front panel and remove the panel (Figure 82).

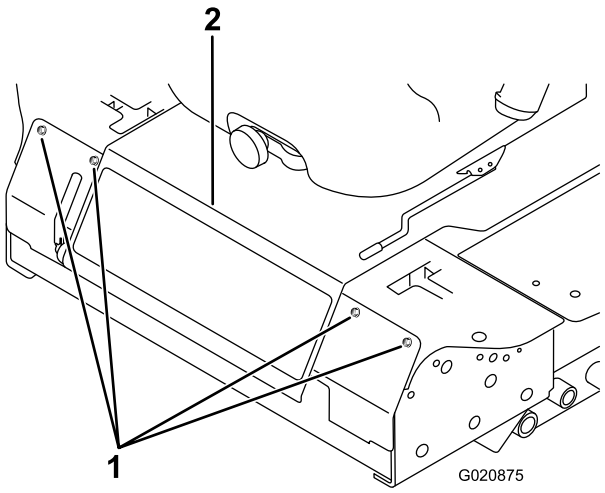


g020875

**Figure 82**

1. Bolt
2. Control panel

3. Loosen the 2 screws securing the interlock switch (Figure 83).

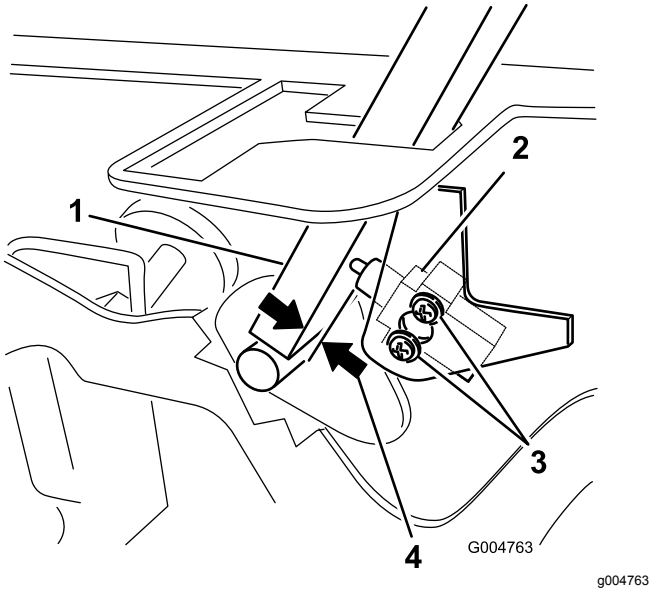



**Figure 83**

1. Control lever
2. Neutral-interlock switch
3. Screw
4. 0.4 to 1 mm (0.015 to 0.045 inch)

4. Holding the control lever against the frame, move the switch toward the lever until the distance between the lever and switch body is 0.4 to 1 mm (0.015 to 0.045 inch) as shown in Figure 83.
5. Secure the switch.
6. Repeat steps 3 to 5 for the other lever.
7. Install the front panel.

# Adjusting the Control-Lever Neutral Return

If the motion-control levers do not align with the neutral slots when released from the REVERSE position, adjustment is required. Adjust each lever, spring, and rod separately.

1. Disengage the PTO, move the control lever to the NEUTRAL-LOCK position, and engage the parking brake.
2. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
3. Remove the bolts securing the front panel and remove the panel (Figure 84).

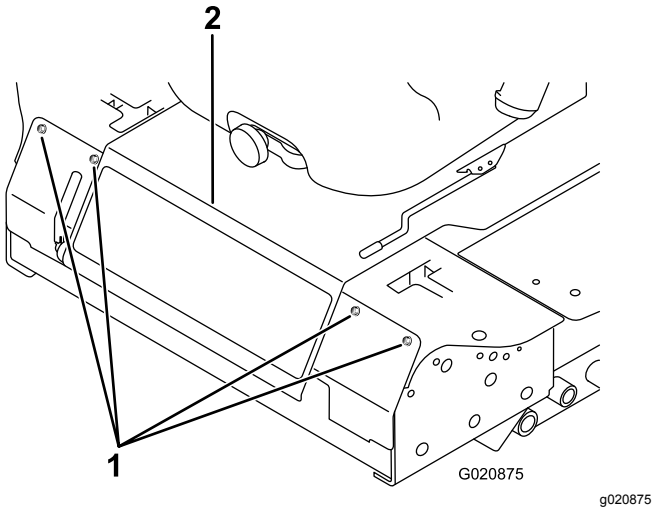



**Figure 84**

1. Bolt
2. Control panel

4. Move the control lever to the NEUTRAL position but **not locked** (Figure 86).
5. Pull the lever back until the clevis pin (on an arm above the pivot shaft) contacts the end of the slot (just beginning to put pressure on the spring) as shown in Figure 85.

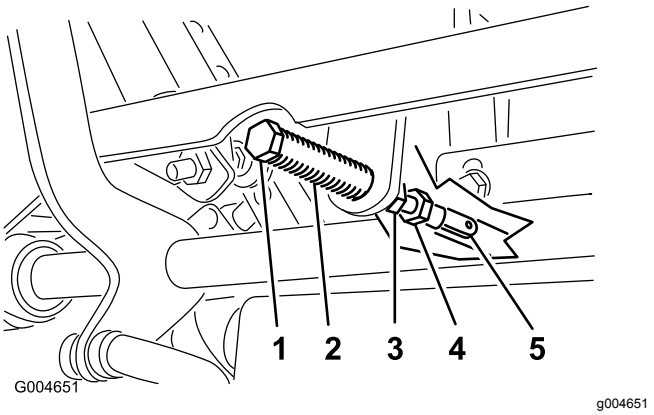



**Figure 85**

1. Clevis pin
2. Slot
3. Jam nut
4. Adjustment bolt
5. Yoke

6. Check where the control lever is relative to notch in the console (Figure 86).

   **Note:** The control lever should be centered, allowing lever to pivot outward to the NEUTRAL-LOCK position.

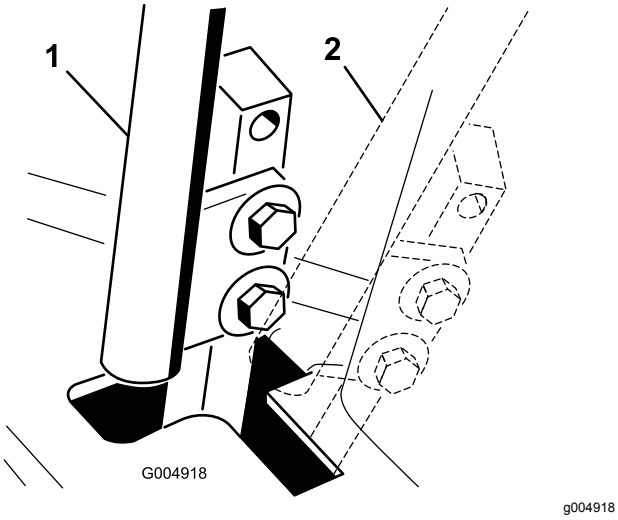



**Figure 86**

1. NEUTRAL position
2. NEUTRAL-LOCK position

7. If adjustment is needed, loosen the nut and jam nut against the yoke (Figure 85).
8. Applying slight rearward pressure on the motion-control lever, turn the head of the adjustment bolt in the appropriate direction until the control lever is centered in the NEUTRAL-LOCK position (Figure 85).

   **Note:** Rearward pressure on the lever keeps the pin at the end of the slot and allow the adjustment bolt to move the lever to the appropriate position.
9. Tighten the nut and jam nut (Figure 85).
10. Repeat steps 4 through 9 for the other control lever.
11. Install the front panel.

# Adjusting the Traction Drive for Neutral

Make this adjustment with the drive wheels turning.

**⚠ DANGER**

**Mechanical or hydraulic jacks may fail to support the machine and cause a serious injury.**

- **Use jack stands when supporting the machine.**
- **Do not use hydraulic jacks.**

**⚠ WARNING**

**The engine must be running to perform this adjustment. Contact with moving parts or hot surfaces may cause personal injury.**

**Keep hands, feet, face, clothing, and other body parts away from rotating parts, muffler, and other hot surfaces.**

1. Raise the frame onto stable jack stands so that the drive wheels can rotate freely.
2. Slide the seat forward, unlatch it, and swing it up and forward.
3. Disconnect the electrical connector from the seat safety switch.
4. Temporarily install a jumper wire across the terminals in the wire harness connector.
5. Start the engine, ensure that the throttle lever is midway between the FAST and SLOW positions, and release the parking brake.

   **Note:** The motion-control levers must be in the NEUTRAL-LOCK position while you make any adjustments.
6. Adjust the pump rod length on one side by rotating the hex shaft, in the appropriate direction, until the corresponding wheel is still or slightly creeping in reverse (Figure 87).

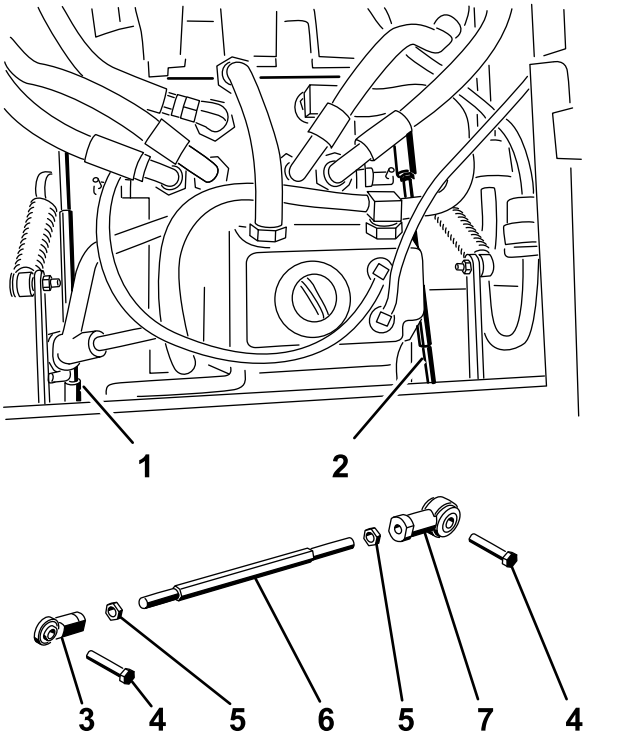



Figure 56
g004488

**Figure 87**

1. Right pump rod
2. Left pump rod
3. Ball joint
4. Bolt
5. Jam nut
6. Hex shaft
7. Ball joint

7. Move the motion-control lever forward and reverse, then back to neutral.

   **Note:** The wheel must stop turning or slightly creep in reverse.

8. Move the throttle lever to the FAST position.

   **Note:** Make sure that the wheel remains stopped or slightly creeps in reverse; adjust it if necessary.

9. Repeat steps 6 through 8 for the other side of the machine.
10. Tighten the jam nuts at the ball joints (Figure 85).
11. Move the throttle lever to the SLOW position and shut off the engine.
12. Remove the jumper wire from the wire harness connector and plug the connector into the seat switch.

**⚠ WARNING**


**The electrical system does not perform proper safety shutoff with the jumper wire installed.**

- **Remove the jumper wire from the wire harness connector and plug the connector into the seat switch when you complete adjustment.**
- **Never operate the machine with the jumper installed and the seat switch bypassed.**

13. Lower the seat into position.
14. Remove the jack stands.

# Adjusting the Maximum Ground Speed

1. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
2. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
3. Remove the bolts securing the front panel and remove the panel (Figure 88).

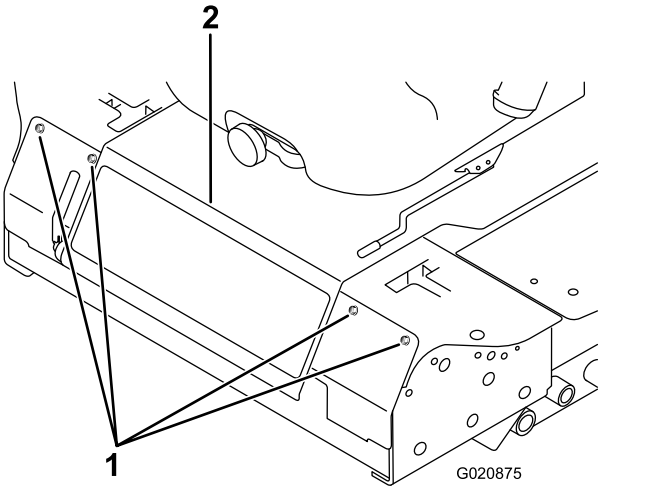


g020875

**Figure 88**

1. Bolt
2. Control panel

4. Loosen the jam nut on the stop bolt for a control lever (Figure 89).

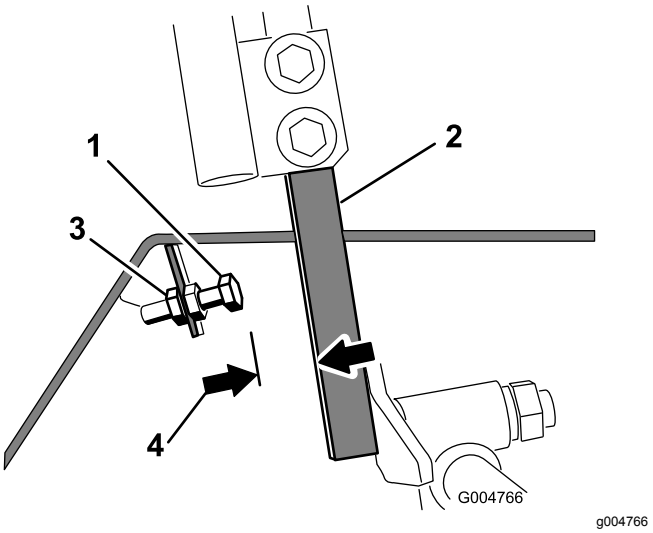



**Figure 89**

1. Stop bolt
2. Control lever
3. Jam nut
4. 1.5 mm (0.060 inch)

5. Thread the stop bolt all the way in (away from the control lever).
6. Push the control lever all the way forward until it stops and hold it there.
7. Thread the stop bolt out (toward the control lever) until there is a gap of 1.5 mm (0.060 inch) between the head of the stop bolt and the control lever.

   **Note:** If you want to reduce the maximum machine speed, back each stop bolt out an equal amount toward the control lever until you reach the desired maximum speed. You may need to test your adjustment several times.
8. Tighten the jam nut to secure the stop bolt in place.
9. Repeat steps 4 through 8 for the other control lever.
10. Install the front panel.
11. Ensure that the machine drives straight and does not turn when both control levers are pushed all the way forward.

    **Note:** If the machine turns, the stop bolts are not evenly set and you need to adjust them further.

# Adjusting the Tracking

1. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
2. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
3. Loosen the bolts securing the control levers (Figure 90).

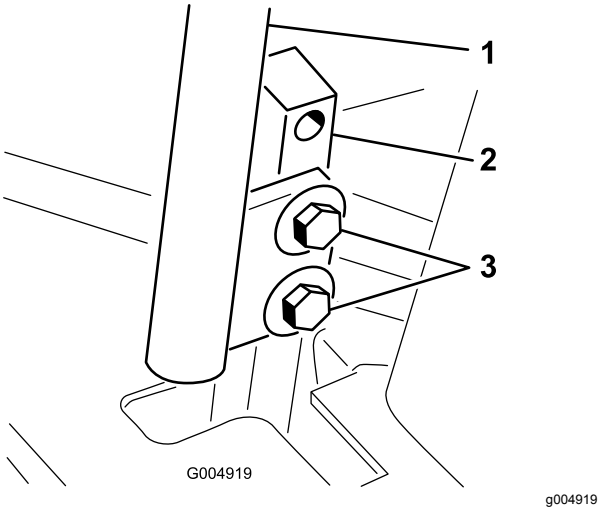



**Figure 90**

1. Control lever
2. Control-lever post
3. Bolts

4. Have someone push the control-lever posts (not the control levers) all the way forward into the maximum-speed position and hold them there.
5. Adjust the control levers so that they line up and tighten the bolts, securing the levers to the posts (Figure 91).

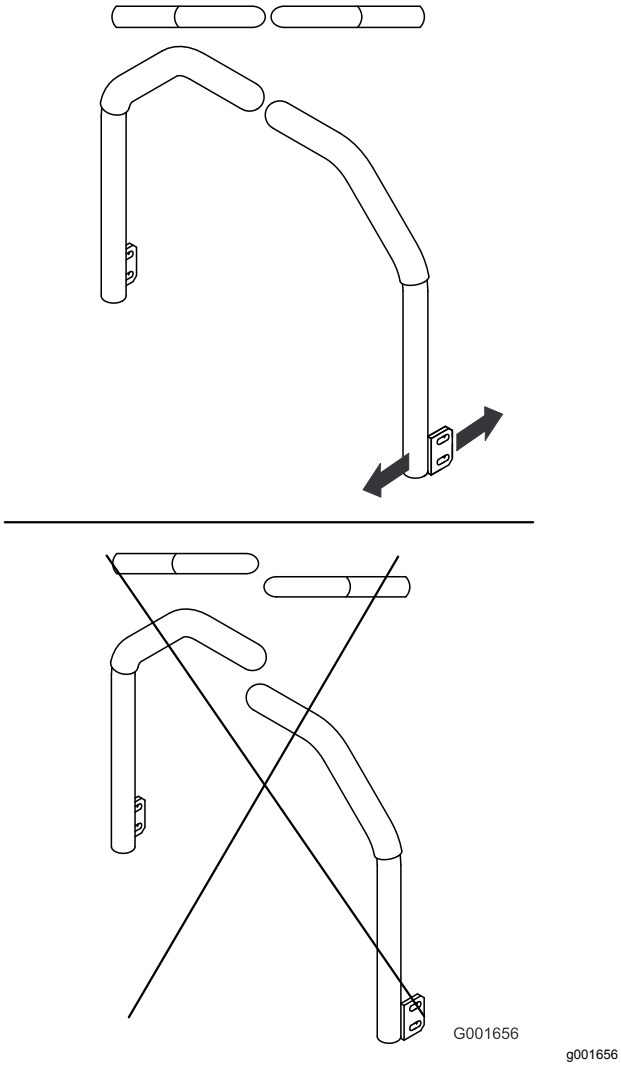



**Figure 91**

# *Hydraulic System Maintenance*

The reservoir is filled at the factory with approximately 4.7 liters (5 quarts) of high quality tractor transmission/hydraulic fluid. The recommended replacement fluid is as follows:

> **Toro Premium Transmission/Hydraulic Tractor Fluid**
> (Available in 5 gallon pails or 55 gallon drums. See parts catalog or Toro distributor for part numbers.)

Alternate fluids: If the Toro fluid is not available, Mobil® 424 hydraulic fluid may be used.

**Note:** Toro will not assume responsibility for damage caused by improper substitutions.

**Note:** Many hydraulic fluids are almost colorless, making it difficult to spot leaks. A red dye additive for the hydraulic system oil is available in 20 ml (0.67 oz) bottles. One bottle is sufficient for 15 to 22 L (4 to 6 US gallons) of hydraulic fluid. Order Part No. 44-2500 from your authorized Toro distributor.

# Hydraulic System Safety

- Seek immediate medical attention if fluid is injected into skin. Injected fluid must be surgically removed within a few hours by a doctor.
- Ensure that all hydraulic-fluid hoses and lines are in good condition and all hydraulic connections and fittings are tight before applying pressure to the hydraulic system.
- Keep your body and hands away from pinhole leaks or nozzles that eject high-pressure hydraulic fluid.
- Use cardboard or paper to find hydraulic leaks.
- Safely relieve all pressure in the hydraulic system before performing any work on the hydraulic system.

# Checking the Hydraulic System

**Service Interval:** Before each use or daily

Check the level of the hydraulic fluid before you first start the engine and daily thereafter.

1. Position the machine on a level surface.
2. Move the motion-control levers to the NEUTRAL-LOCK position and start the engine.

   **Note:** Run the engine at the lowest possible rpm to purge the system of air.

   ***Important:*** **Do not engage the PTO.**

3. Raise the deck to extend the lift cylinders, shut off the engine, and remove the key.
4. Raise the seat to access the hydraulic fluid tank.
5. Remove the hydraulic fill cap from the filler neck (Figure 92).

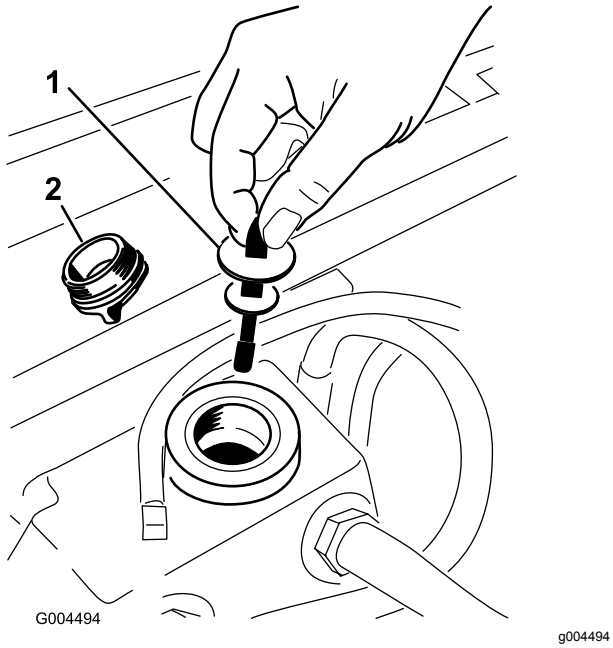



**Figure 92**

1. Dipstick
2. Fill cap

6. Remove the dipstick and wipe it with a clean rag (Figure 92).
7. Place the dipstick into the filler neck; then remove it and check the level of fluid (Figure 92).

   **Note:** If the level is not within the notched area of the dipstick, add enough high-quality hydraulic fluid to raise the level to within the notched area.

   ***Important:*** **Do not overfill.**
8. Replace the dipstick and thread the fill cap finger-tight onto the filler neck.
9. Check all hoses and fittings for leaks.

# Changing the Hydraulic Fluid and Filter

**Service Interval:** After the first 200 hours

Every 800 hours

1. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
2. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
3. Place a large pan under the hydraulic reservoir and transmission case and remove the plugs, draining all of the hydraulic fluid (Figure 93).

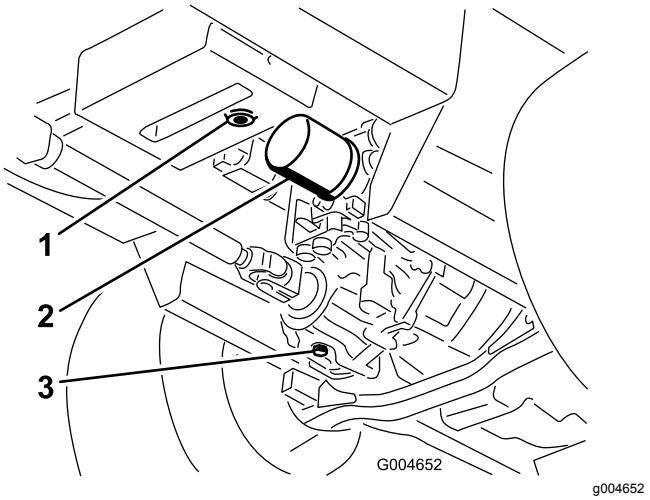



**Figure 93**

1. Hydraulic-reservoir drain plug
2. Filter
3. Transmission-case drain plug

4. Clean the area around the hydraulic fluid filter and remove the filter (Figure 93).
5. Immediately install a new hydraulic fluid filter.
6. Install the hydraulic-reservoir and transmission-case drain plugs.
7. Fill the reservoir to the proper level (approximately 5.7 L or 6 US qt); refer to Checking the Hydraulic System (page 60).
8. Start the engine and check for oil leaks. Allow the engine to run for about 5 minutes, then shut it off.
9. After 2 minutes, check the level of the hydraulic fluid; refer to Checking the Hydraulic System (page 60).

# *Cleaning*

## Cleaning Under the Mower

**Service Interval:** Before each use or daily

1. Disengage the PTO, move the motion-control levers to the NEUTRAL-LOCK position, and engage the parking brake.
2. Move the throttle lever to the SLOW position, shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
3. Raise the mower to the transport position.
4. Raise the front of the machine using jack stands.
5. Thoroughly clean the underside of the mower with water.


## Waste Disposal

Engine oil, batteries, hydraulic fluid, and engine coolant are pollutants. Dispose of these according to your state and local regulations.

# Storage

## Machine

1. Remove the key from the ignition switch and store it in a memorable place.
2. Thoroughly clean the machine, deck, and engine, paying special attention to these areas:
   - Radiator and radiator screen
   - Underneath the deck
   - Under the deck belt covers
   - Counterbalance springs
   - PTO-shaft assembly
   - All grease fittings and pivot points
   - Inside the control box
   - Beneath the seat plate and top of the transmission
3. Check and adjust front and rear tire pressure; refer to Checking the Tire Pressure (page 52).
4. Remove, sharpen, and balance the mower blades. Install the blades and torque the blade fasteners to 115 to 149 N·m (85 to 110 ft-lb).
5. Check all fasteners for looseness and tighten them as necessary. Torque the 6 bolts securing the mower deck frame to the traction unit (Figure 94) to 359 N·m (265 ft-lb).

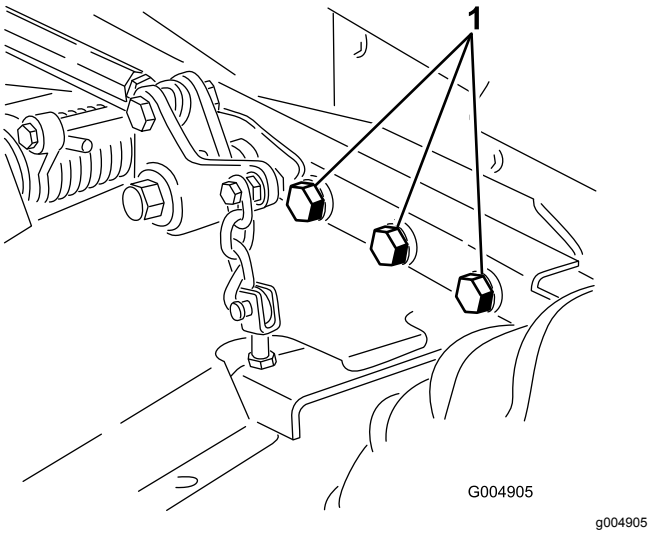


g004905

**Figure 94**

Right side not shown.

1. Bolts

6. Grease or oil all grease fittings, pivot points, and transmission-bypass-valve pins. Wipe off any excess lubricant.
7. Lightly sand and use touch up paint on painted areas that are scratched, chipped or rusted. Repair any dents in the metal body.

8. Service the battery and cables as follows:
   A. Remove the battery terminals from the battery posts.
   B. Clean the battery, terminals, and posts with a wire brush and baking soda solution.
   C. Coat the cable terminals and battery posts with Grafo 112X skin-over grease (Toro Part No. 505-47) or petroleum jelly to prevent corrosion.
   D. Slowly recharge the battery for 24 hours every 60 days to prevent lead sulfation of the battery.

# Engine

1. Drain the engine oil from the oil pan and replace the drain plug.
2. Replace the oil filter.
3. Fill the engine with the recommended motor oil.
4. Start the engine and run it at idle speed for 2 minutes.
5. Drain the fuel from the fuel tank, fuel lines, pump, filter, and separator. Flush the fuel tank with clean diesel fuel and connect all fuel lines.
6. Thoroughly clean and service the air-cleaner assembly.
7. Seal the air-cleaner inlet and the exhaust outlet with weather proof masking tape.
8. Check the oil filler cap and fuel-tank cap to ensure that they are securely in place.

# Notes:

# Notes:

# Notes:

# California Proposition 65 Warning Information

## What is this warning?

You may see a product for sale that has a warning label like the following:



**WARNING:** Cancer and Reproductive Harm—www.p65Warnings.ca.gov.

## What is Prop 65?

Prop 65 applies to any company operating in California, selling products in California, or manufacturing products that may be sold in or brought into California. It mandates that the Governor of California maintain and publish a list of chemicals known to cause cancer, birth defects, and/or other reproductive harm. The list, which is updated annually, includes hundreds of chemicals found in many everyday items. The purpose of Prop 65 is to inform the public about exposure to these chemicals.

Prop 65 does not ban the sale of products containing these chemicals but instead requires warnings on any product, product packaging, or literature with the product. Moreover, a Prop 65 warning does not mean that a product is in violation of any product safety standards or requirements. In fact, the California government has clarified that a Prop 65 warning "is not the same as a regulatory decision that a product is 'safe' or 'unsafe.'" Many of these chemicals have been used in everyday products for years without documented harm. For more information, go to https://oag.ca.gov/prop65/faqs-view-all.

A Prop 65 warning means that a company has either (1) evaluated the exposure and has concluded that it exceeds the "no significant risk level"; or (2) has chosen to provide a warning based on its understanding about the presence of a listed chemical without attempting to evaluate the exposure.

## Does this law apply everywhere?

Prop 65 warnings are required under California law only. These warnings are seen throughout California in a wide range of settings, including but not limited to restaurants, grocery stores, hotels, schools, and hospitals, and on a wide variety of products. Additionally, some online and mail order retailers provide Prop 65 warnings on their websites or in catalogs.

## How do the California warnings compare to federal limits?

Prop 65 standards are often more stringent than federal and international standards. There are various substances that require a Prop 65 warning at levels that are far lower than federal action limits. For example, the Prop 65 standard for warnings for lead is 0.5 µg/day, which is well below the federal and international standards.

## Why don't all similar products carry the warning?

- Products sold in California require Prop 65 labelling while similar products sold elsewhere do not.
- A company involved in a Prop 65 lawsuit reaching a settlement may be required to use Prop 65 warnings for its products, but other companies making similar products may have no such requirement.
- The enforcement of Prop 65 is inconsistent.
- Companies may elect not to provide warnings because they conclude that they are not required to do so under Prop 65; a lack of warnings for a product does not mean that the product is free of listed chemicals at similar levels.

## Why does Toro include this warning?

Toro has chosen to provide consumers with as much information as possible so that they can make informed decisions about the products they buy and use. Toro provides warnings in certain cases based on its knowledge of the presence of one or more listed chemicals without evaluating the level of exposure, as not all the listed chemicals provide exposure limit requirements. While the exposure from Toro products may be negligible or well within the "no significant risk" range, out of an abundance of caution, Toro has elected to provide the Prop 65 warnings. Moreover, if Toro does not provide these warnings, it could be sued by the State of California or by private parties seeking to enforce Prop 65 and subject to substantial penalties.

# The Toro Warranty

A Two-Year Limited Warranty

## Conditions and Products Covered

The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly warrant your Toro Commercial product ("Product") to be free from defects in materials or workmanship for two years or 1500 operational hours*, whichever occurs first. This warranty is applicable to all products with the exception of Aerators (refer to separate warranty statements for these products). Where a warrantable condition exists, we will repair the Product at no cost to you including diagnostics, labor, parts, and transportation. This warranty begins on the date the Product is delivered to the original retail purchaser.
* Product equipped with an hour meter.

## Instructions for Obtaining Warranty Service

You are responsible for notifying the Commercial Products Distributor or Authorized Commercial Products Dealer from whom you purchased the Product as soon as you believe a warrantable condition exists. If you need help locating a Commercial Products Distributor or Authorized Dealer, or if you have questions regarding your warranty rights or responsibilities, you may contact us at:

Toro Commercial Products Service Department
Toro Warranty Company
8111 Lyndale Avenue South
Bloomington, MN 55420-1196

952–888–8801 or 800–952–2740
E-mail: commercial.warranty@toro.com

## Owner Responsibilities

As the Product owner, you are responsible for required maintenance and adjustments stated in your *Operator's Manual*. Failure to perform required maintenance and adjustments can be grounds for disallowing a warranty claim.

## Items and Conditions Not Covered

Not all product failures or malfunctions that occur during the warranty period are defects in materials or workmanship. This warranty does not cover the following:

- Product failures which result from the use of non-Toro replacement parts, or from installation and use of add-on, or modified non-Toro branded accessories and products. A separate warranty may be provided by the manufacturer of these items.
- Product failures which result from failure to perform recommended maintenance and/or adjustments. Failure to properly maintain your Toro product per the Recommended Maintenance listed in the *Operator's Manual* can result in claims for warranty being denied.
- Product failures which result from operating the Product in an abusive, negligent, or reckless manner.
- Parts subject to consumption through use unless found to be defective. Examples of parts which are consumed, or used up, during normal Product operation include, but are not limited to, brake pads and linings, clutch linings, blades, reels, rollers and bearings (sealed or greasable), bed knives, spark plugs, castor wheels and bearings, tires, filters, belts, and certain sprayer components such as diaphragms, nozzles, and check valves, etc.
- Failures caused by outside influence. Conditions considered to be outside influence include, but are not limited to, weather, storage practices, contamination, use of unapproved fuels, coolants, lubricants, additives, fertilizers, water, or chemicals, etc.
- Failure or performance issues due to the use of fuels (e.g. gasoline, diesel, or biodiesel) that do not conform to their respective industry standards.
- Normal noise, vibration, wear and tear, and deterioration.
- Normal "wear and tear" includes, but is not limited to, damage to seats due to wear or abrasion, worn painted surfaces, scratched decals or windows, etc.

## Parts

Parts scheduled for replacement as required maintenance are warranted for the period of time up to the scheduled replacement time for that part. Parts replaced under this warranty are covered for the duration of the original product warranty and become the property of Toro. Toro will make the final decision whether to repair any existing part or assembly or replace it. Toro may use remanufactured parts for warranty repairs.

## Deep Cycle and Lithium-Ion Battery Warranty:

Deep cycle and Lithium-Ion batteries have a specified total number of kilowatt-hours they can deliver during their lifetime. Operating, recharging, and maintenance techniques can extend or reduce total battery life. As the batteries in this product are consumed, the amount of useful work between charging intervals will slowly decrease until the battery is completely worn out. Replacement of worn out batteries, due to normal consumption, is the responsibility of the product owner. Battery replacement may be required during the normal product warranty period at owner's expense. Note: (Lithium-Ion battery only): A Lithium-Ion battery has a part only prorated warranty beginning year 3 through year 5 based on the time in service and kilowatt hours used. Refer to the *Operator's Manual* for additional information.

## Maintenance is at Owner's Expense

Engine tune-up, lubrication, cleaning and polishing, replacement of filters, coolant, and completing recommended maintenance are some of the normal services Toro products require that are at the owner's expense.

## General Conditions

Repair by an Authorized Toro Distributor or Dealer is your sole remedy under this warranty.

**Neither The Toro Company nor Toro Warranty Company is liable for indirect, incidental or consequential damages in connection with the use of the Toro Products covered by this warranty, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under this warranty. Except for the Emissions warranty referenced below, if applicable, there is no other express warranty. All implied warranties of merchantability and fitness for use are limited to the duration of this express warranty.**

Some states do not allow exclusions of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

## Note regarding engine warranty:

The Emissions Control System on your Product may be covered by a separate warranty meeting requirements established by the U.S. Environmental Protection Agency (EPA) and/or the California Air Resources Board (CARB). The hour limitations set forth above do not apply to the Emissions Control System Warranty. Refer to the Engine Emission Control Warranty Statement supplied with your product or contained in the engine manufacturer's documentation for details

## Countries Other than the United States or Canada

Customers who have purchased Toro products exported from the United States or Canada should contact their Toro Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the Toro importer.

374-0253 Rev D