



Hydraulic Power Pack

ProPass 200 Top Dresser

Model No. 44713—Serial No. 315000001 and Up

Form No. 3392-986 Rev B

Installation Instructions

This product complies with all relevant European directives. For details, please see the Declaration of Incorporation (DOI) at the back of this publication.

⚠ WARNING

CALIFORNIA Proposition 65 Warning

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.


Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Wash hands after handling.

Safety

Safety and Instructional Decals



Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or lost.

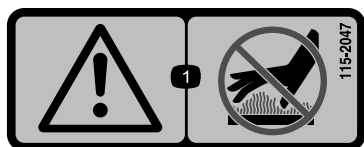

115-2047

decal115-2047


1. Warning—do not touch the hot surface.



119-6807

decal119-6807

1. Warning—no step

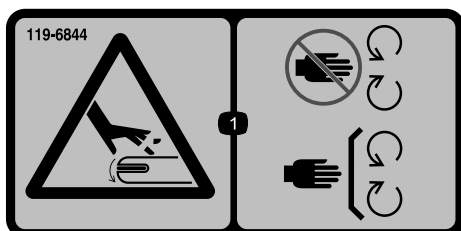


119-6844

decal119-6844

1. Cutting/dismemberment hazard of hand, conveyor—stay away from moving parts, keep all guards and shields in place.



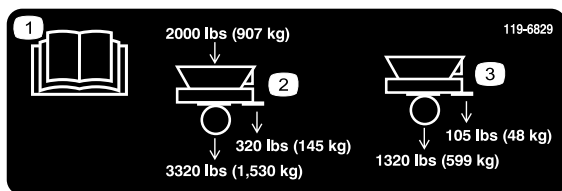

119-6829

1. Read the *Operator's Manual*.
 2. Maximum load of 907 kg (2000 lb) results in an axle weight of 1,530 kg (3320 lb) and a tongue weight of 145 kg (320 lb).
 3. Empty hopper has an axle weight of 599 kg (1320 lb) and a tongue weight of 48 kg (105 lb).
-

Installation

⚠ CAUTION

Before attempting to install the ProPass - 11 HP Hydraulic Power Pack, ensure that:

- The ProPass is located on firm level ground.
- The ProPass jack stand is lowered.
- All external hydraulic and electrical power sources are disconnected.
- The ProPass should be prevented from unexpected movement by blocking the wheels at the front and the rear.
- Use an assistant when lifting the Power Pack assembly.

1. Following the instructions given in the *Operator's Manual* for the machine. Remove the Twin Spinner option and secure the hydraulic power and return hoses.

Note: ProPass models manufactured after April 2005 feature a pre-drilled chassis rear wall. If your ProPass is pre-drilled skip instructions 2-13.

2. Check that the ProPass chassis rear wall is clear to mount the hydraulic tank.

Note: Two mounting bolts must be removed from the chassis rear wall to allow the hydraulic tank to be mounted. Use the bolts for mounting the tank.

3. Remove the hydraulic tank assembly from the crate.
4. Support the hydraulic tank from underneath and position the tank against the ProPass chassis rear wall. The tank should be centered evenly from left to right and should be positioned vertically (Figure 1).

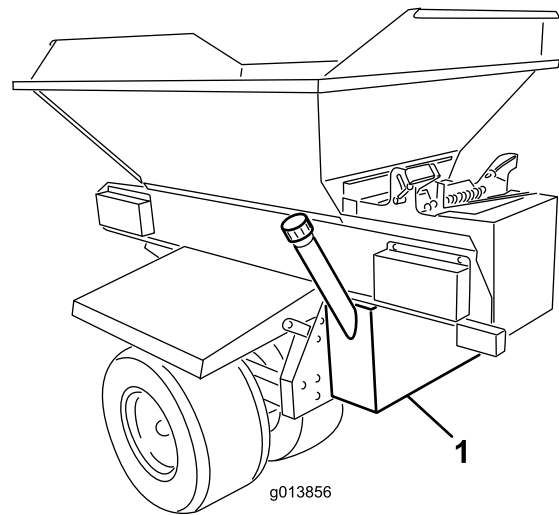


Figure 1

1. Hydraulic tank

5. Ensure that the inlet and outlet fittings and the hose guide mounting bracket all fit cleanly within the round holes in the ProPass chassis rear wall (Figure 2).

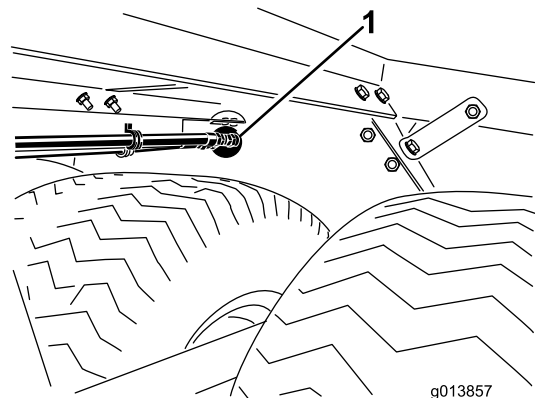


Figure 2

1. Holes in the chassis

6. Ensure that the hydraulic tank is level.
7. Using C-clamps, or similar devices, temporarily clamp the hydraulic tank firmly in place on the ProPass chassis rear wall.
8. Recheck that the hydraulic tank is level.
9. Mark the position of the hydraulic tank mounting holes onto the ProPass chassis rear wall.
10. Un-clamp and remove the hydraulic tank.
11. Center punch the position of the marked holes.
12. Drill a 7/16 inch diameter hole through the ProPass chassis rear wall in each marked and punched position.

13. De-burr each hole.
14. Ensure that the ProPass Hitch Tube is clean and free from dirt or debris.
15. Unpack the engine assembly.
16. Loosen, but do not remove, the 2 bolts and nuts securing the engine mount brackets to the engine mounting plate (Figure 3).

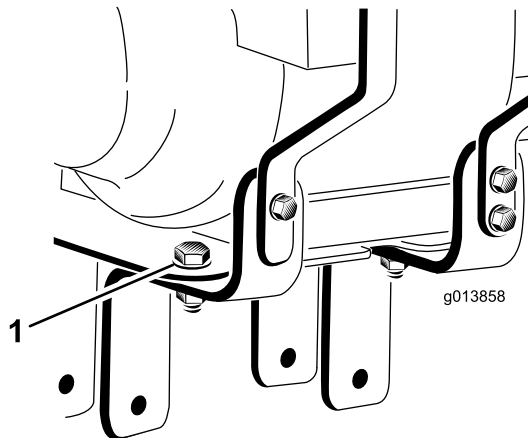


Figure 3

1. Mounting bolts (2)

17. Remove the two nuts holding the battery hold down straps in place and set the nuts, washers and bolt tube off to the side (Figure 4).

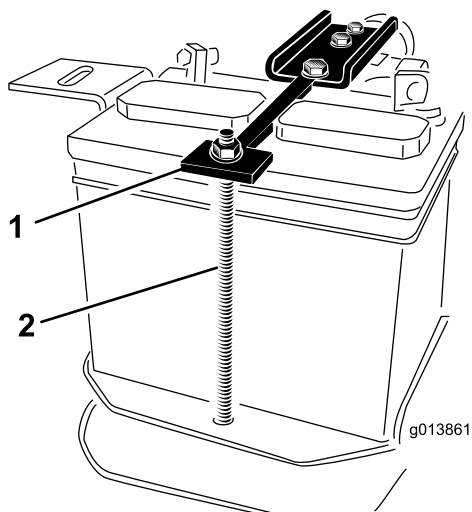


Figure 4

1. Battery hold down strap 2. Battery hold down bolt (2)

18. Remove the battery from its position on the assembly and rest the filter on the base plate.
19. Charge the battery; refer to [Activating and Charging the Battery](#) (page 10).
20. Since the engine assembly is heavy, positioning of this component can be difficult. With the help of an assistant, position the engine assembly

onto the ProPass hitch tube. Ensure that the engine mount brackets straddle the hitch tube (Figure 5 and that the rear of the engine mount plate is approximately 25 mm (1 inch) from the ProPass hitch tube receiver (Figure 6).

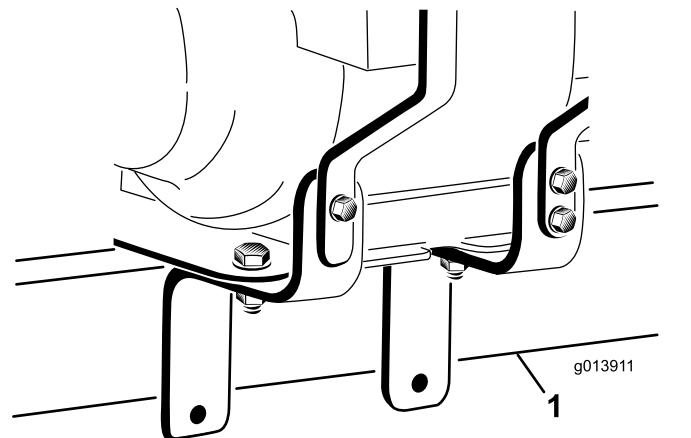


Figure 5

1. Hitch tube

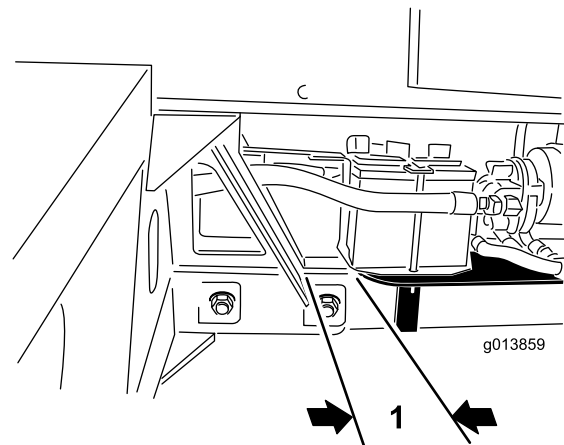


Figure 6

1. One inch

21. Insert the 2 bolts (1/2 x 3 inches) through the engine mount bracket holes ensuring that a flat washer is fitted against each outer face of the engine mount bracket and ensuring that the bolts pass clear beneath the bottom of the ProPass hitch tube. Hand tighten the 2 nuts (1/2 inch) (Figure 7).

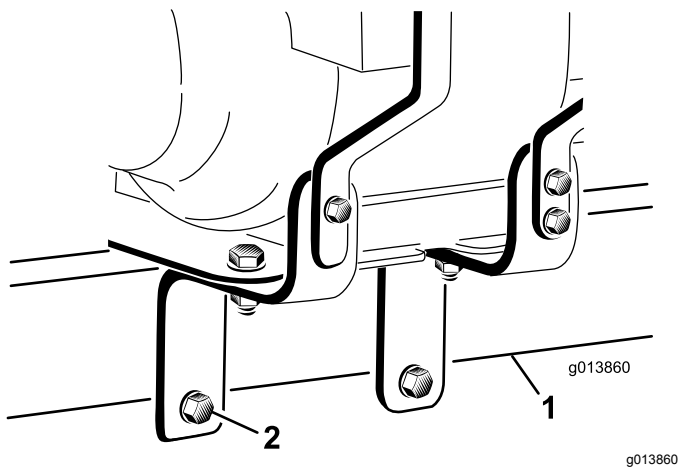


Figure 7

1. Hitch tube
2. Mounting bolts (2)

22. Adjust the engine mount bracket so that it is tight to the hitch. Fully tighten the two bolts securing the engine mount brackets to the engine mounting plate (Figure 8).
23. Check that the engine mounting plate is level and fully tighten the 2 bolts (1/2 x 5 inches) through the engine mount bracket lower holes.
24. Place the battery onto the battery tray, positioning the terminals as shown in Figure 8.
25. Position the battery hold down on the battery (Figure 8).
26. Hold the battery mount strap around the underside of the hitch tube (Figure 8).
27. On the right side, install a battery bolt through the washer, battery mount strap, engine mount plate, battery tray and hold down. Loosely install a flange nut (Figure 8).
- Note:** Make sure the bolts are installed from the bottom.
28. On the left side, install a battery bolt through the washer, battery mount strap, engine mount plate, battery tray, battery bolt tube, and hold down. Loosely install a flange nut (Figure 8).
29. Make sure everything is concentric and tighten the nuts

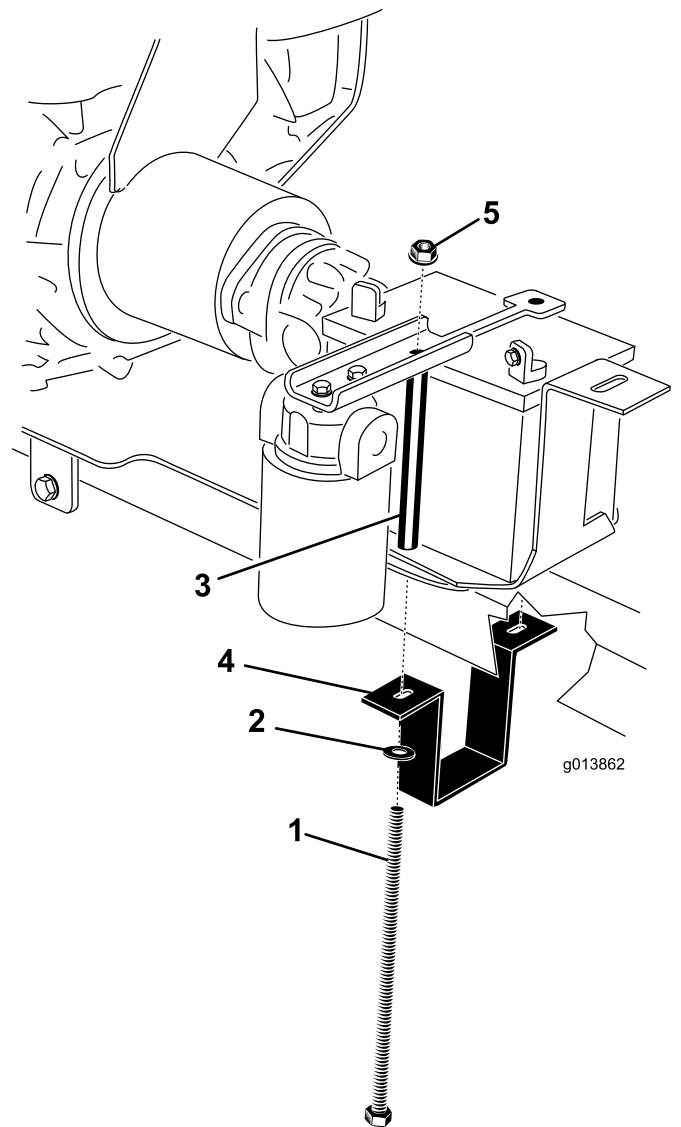


Figure 8

1. Battery bolt (2)
2. Washer (2)
3. Bolt tube
4. Battery mount strap
5. Flange locknut (2)

30. Unpack the hose guide, hydraulic return hose (hose #3), hydraulic suction hose (hose #4), 4 bolts (1/4 x 3/4 inch) and 4 locknuts (1/4 inch).
- Note:** Remove the hose secured to the hose guide, hydraulic return hose and hydraulic suction hose for shipping.
31. Using 2 bolts (1/4 x 3/4 inch) and flange locknuts, attach the hose guide to the bracket on the hydraulic tank (Figure 9).

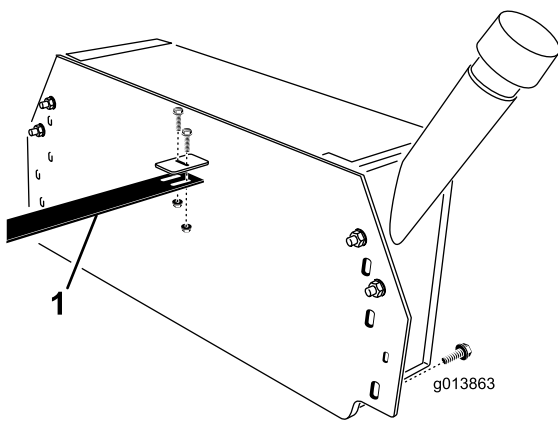


Figure 9

1. Hose guide

Note: Two mounting bolts must be removed from the chassis rear wall to allow the hydraulic tank to be mounted. Use the bolts for mounting the tank.

32. Unpack 4 bolts (3/8 x 1 inch) and nylon locknuts. Supporting the hydraulic tank from below, pass the hose guide and hydraulic hoses #3 and #4 through the large central hole in the ProPass chassis rear wall and locate the hydraulic tank against the chassis rear wall. Temporarily clamp, or bolt, the hydraulic tank in place.

Note: The hose guide should be fed through the center hole on the front side of the chassis. Two people may be required

33. Install the hydraulic return hose (#3) and the hydraulic suction hose (#4) to the appropriate fittings on the hydraulic tank.

Note: Hose #3 and hose #4 do not have the same fittings so each hose will only fit into the correct fitting in the hydraulic tank.

Note: When mounting the hoses, make sure there is adequate clearance to the tires.

34. The hose guide should sit on top of the tab from the vertical leg of the battery tray (Figure 10). If the holes in the hose guide do not match the holes in the battery tray tab, the hose guide length may be adjusted by loosening the bolts attaching the hose guide to the hydraulic tank bracket and sliding the hose guide forward or to the rear as required.

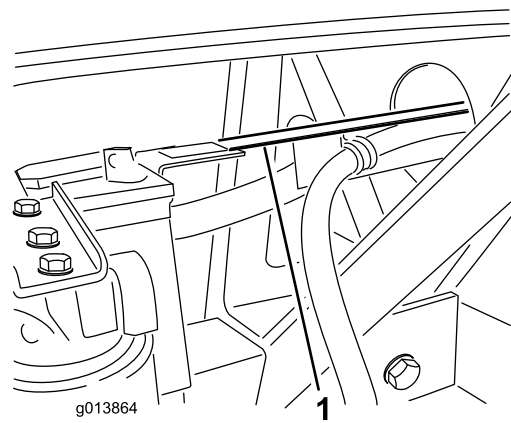


Figure 10

1. Hose guide

35. Attach the hose guide to the battery tray tab using 2 bolts (1/4 x 3/4 inch) and flange locknuts (Figure 10).
36. Mount the hydraulic tank to the ProPass chassis rear wall using the bolt (3/8 x 1 inch), nylon locknuts and flat washers. Also, use the mounting bolts previously removed. Tighten the fasteners.
37. Connect hydraulic hose #3 to the filter outlet (Figure 11).

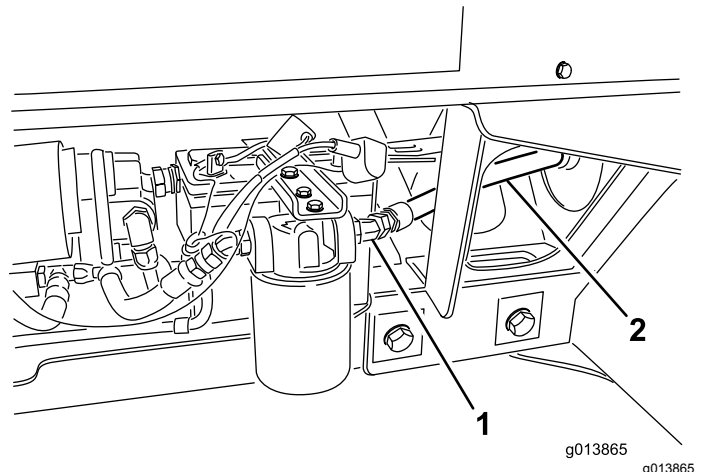


Figure 11

1. Filter outlet
2. Hydraulic hose #3

38. Connect hydraulic hose #4 to the suction side of the hydraulic pump (Figure 12).

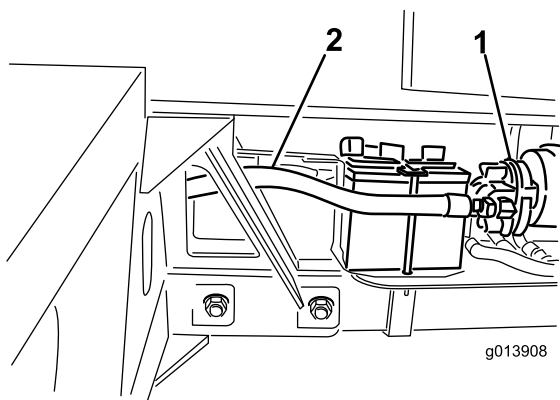


Figure 12

1. Hydraulic pump 2. Hydraulic hose #4

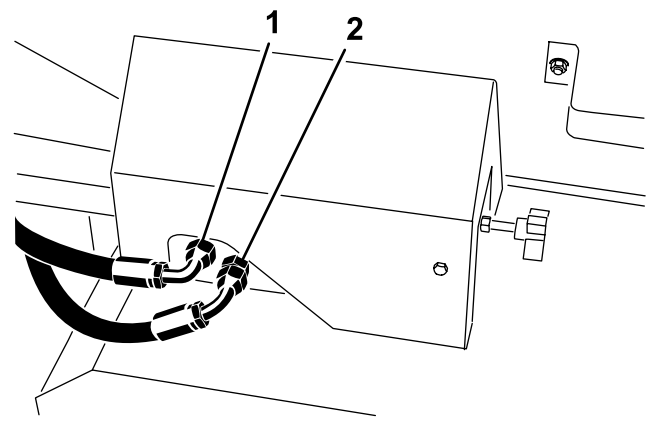


Figure 15

1. Return 2. Pressure

39. On the SH version, model 44701, remove the fasteners securing the cover to the front of the ProPass and set the cover aside ([Figure 13](#)).

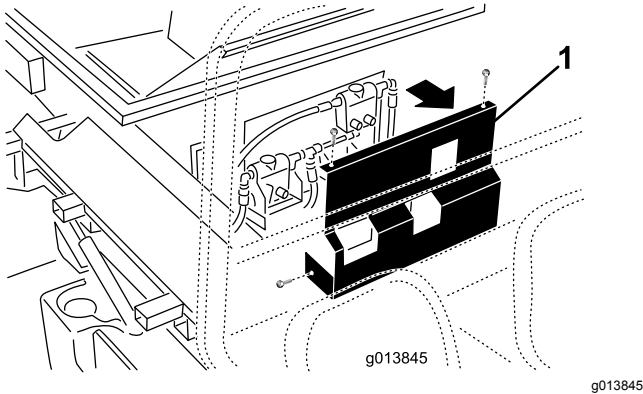


Figure 13

1. Cover

40. Identify the pressure and return connections on the ProPass base model. Refer to [Figure 14](#) for the SH versions and [Figure 15](#) for the EH versions.

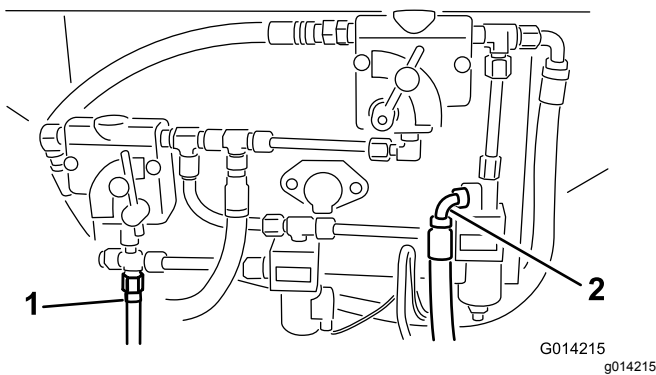


Figure 14

1. Pressure 2. Return

41. If pressure and return hoses were previously installed at the locations shown in [Figure 14](#) and [Figure 15](#), remove them.

Note: Make sure the hoses do not contact any hot, sharp or moving parts. Try to attain as much clearance from the muffler as possible.

42. Connect the hydraulic hoses to the hydraulic control panel. Refer to [Figure 14](#) and [Figure 16](#) on the SH versions and [Figure 15](#) and [Figure 17](#) on the EH versions.

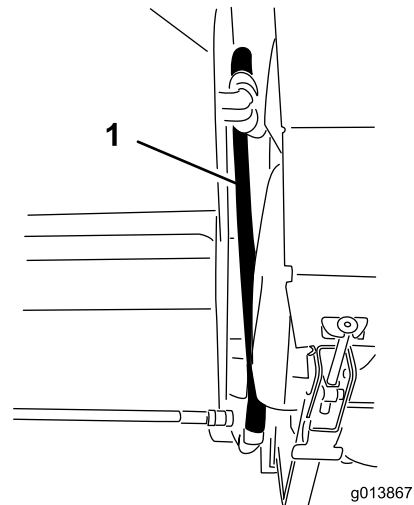


Figure 16

1. Hose routing

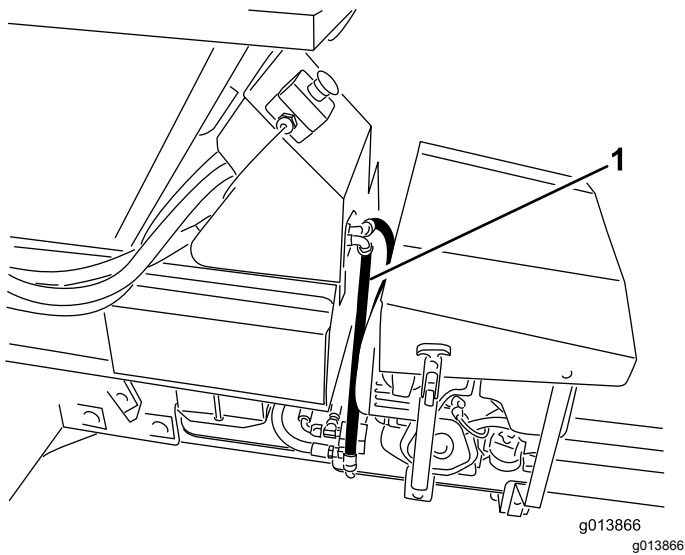


Figure 17

1. Hose routing

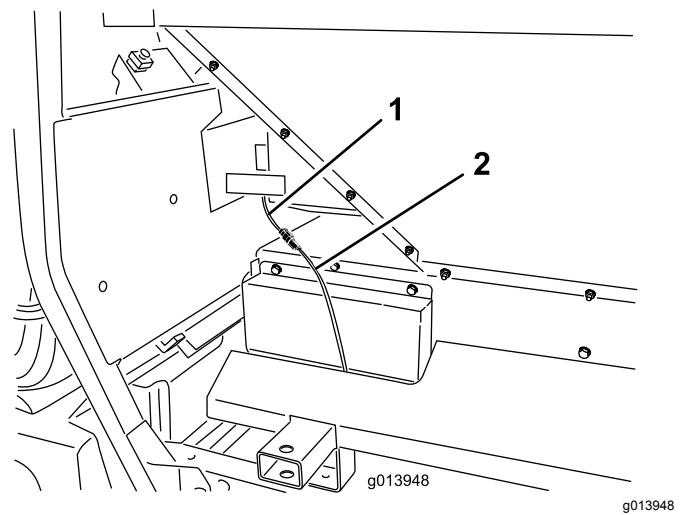


Figure 19

1. Power harness
2. Intermediate wiring harness

43. Tighten all of the hydraulic connections and fasteners.
44. Refit the ProPass Twin Spinner assembly.
45. Connect the black cable and the black pre-routed cable to the battery negative terminal and the white cable and the red pre-routed cable to the battery positive terminal.
46. Plug the intermediate wiring harness into the power harness connector on the ProPass (Figure 18 or Figure 19).

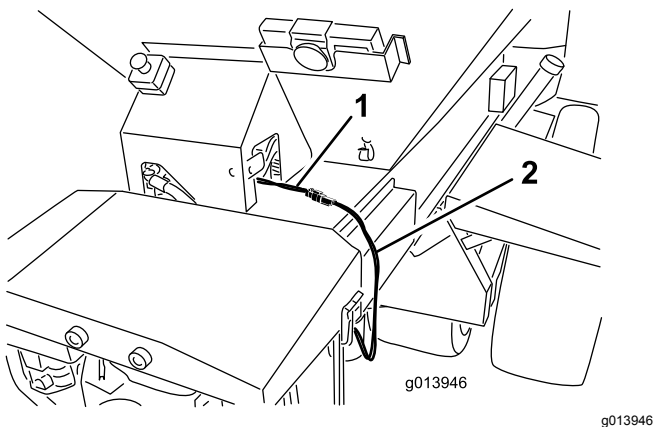


Figure 18

1. Power harness
2. Intermediate wiring harness

Operation

⚠ CAUTION

Ensure that all control systems are turned off when working on the Power Pack.

Engine Oil

Important: The engine is shipped **WITHOUT OIL** (except for residual oil after testing at the factory). Refer to the engine owners manual for additional information.

The engine is shipped from the factory **without** oil so it must be filled with approximately 1,005 cm³ (34 ounces) of oil before starting. Check the level of oil before the engine is first started and daily thereafter.

The engine uses any high-quality oil having the American Petroleum Institute - API - "service classification" SJ, SL or equivalent. Oil viscosity - weight - must be selected according to ambient temperature. Figure 20 illustrates the temperature/viscosity recommendations.

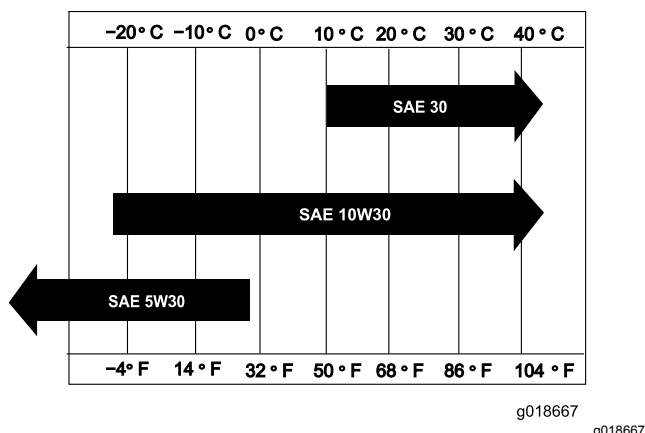


Figure 20

1. Position the machine so that the engine is level.
2. Clean the area around the oil filler cap/dipstick.
3. Remove the oil filler cap/dipstick by rotating it counterclockwise.
4. Wipe the dipstick clean and insert it into the filler port. Do not screw it into the port.
5. Remove the dipstick and check the level of the oil.
6. If the level is near or below the lower limit mark on the dipstick, add only enough oil to raise level to the upper limit mark. Recheck level of oil. Do not overfill.
7. Install the oil filler cap/dipstick and wipe up any spilled oil.

Important: Make sure the engine oil is at the proper level. If the engine oil level is not correct, the engine will crank but will not start.

Hydraulic System

The machine is shipped from the factory without hydraulic fluid so it must be filled with 32.9 L (8.7 U.S. gallons) of high quality hydraulic fluid. Check the level of hydraulic oil before the machine is first started and daily thereafter. The recommended hydraulic fluids are as follows:

Toro Premium Transmission/Hydraulic Tractor Fluid
(Available in 5 gallon pails or 55 gallon drums. See parts catalog or Toro distributor for part numbers.)

Alternate fluids: If the Toro fluid is not available, other petroleum-based Universal Tractor Hydraulic Fluids (UTHF) may be used provided its specifications fall within the listed range for all the following material properties and it meets industry standards. We do not recommend the use of synthetic fluid. Consult with your lubricant distributor to identify a satisfactory product. Note: Toro will not assume responsibility for damage caused by improper substitutions, so use only products from reputable manufacturers who will stand behind their recommendation.

Important: The hydraulic system will not completely fill with fluid until the system is powered up. The hydraulic fluid must therefore be checked and topped up after initial running.

Note: Toro will not assume responsibility for damage caused by improper substitutions, so use only products from reputable manufacturers who will stand behind their recommendation.

Material Properties:

Viscosity, ASTM D445	cSt @ 40 degrees C 55 to 62 cSt @ 100 degrees C 9.1 to 9.8
Viscosity Index ASTM D2270	140 to 152
Pour Point, ASTM D97	-35 degrees F to -46 degrees F

Industry Specifications:

API GL-4, AGCO Powerfluid 821 XL, Ford New Holland FNHA-2-C-201.00, Kubota UDT, John Deere J20C, Vickers 35VQ25, and Volvo WB-101/BM

Note: Many hydraulic fluids are almost colorless, making it difficult to spot leaks. A red dye additive for the hydraulic system oil is available in 2/3 oz (20 ml) bottles. One bottle is sufficient for 15 to 22 L (4 to 6 US gallons) of hydraulic oil. Order part number 44-2500 from your Authorized Toro Distributor.

Filling the Fuel Tank

Fuel Tank Capacity: 6.1 L (1.6 gallons)

Recommended Fuel:


- For best results, use only clean, fresh (less than 30 days old), unleaded gasoline with an octane rating of 87 or higher (R+M)/2 rating method).
- Ethanol: Gasoline with up to 10% ethanol (gasohol) or 15% MTBE (methyl tertiary butyl ether) by volume is acceptable. Ethanol and MTBE are not the same. Gasoline with 15% ethanol (E15) by volume is not approved for use. Never use gasoline that contains more than 10% ethanol by volume, such as E15 (contains 15% ethanol), E20 (contains 20% ethanol), or E85 (contains up to 85% ethanol). Using unapproved gasoline may cause performance problems and/or engine damage which may not be covered under warranty.
- Do not use gasoline containing methanol.
- Do not store fuel either in the fuel tank or fuel containers over the winter unless a fuel stabilizer is used.
- Do not add oil to gasoline.

Activating and Charging the Battery

Use only electrolyte (1.265 specific gravity) to fill battery initially.

1. Clean the top of the battery and remove the vent caps (Figure 21).

Important: Do not add electrolyte while the battery is in the machine. You could spill it, causing corrosion.

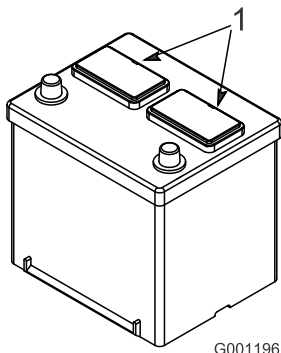


G001196

Figure 21

1. Vent caps

2. Carefully fill each cell with electrolyte until the plates are covered with about 6 mm (1/4 inch) of fluid (Figure 22).

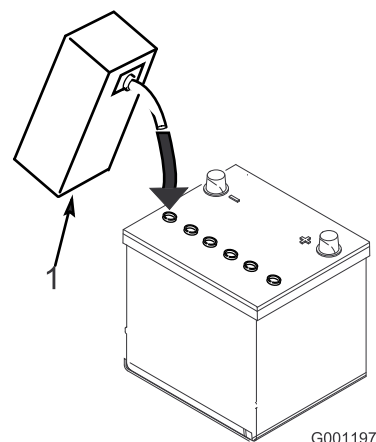

G001197

g001197

Figure 22

1. Electrolyte
3. Allow approximately 20 to 30 minutes for the electrolyte to soak into the plates. Refill as necessary to bring the electrolyte to within about 6 mm (1/4 inch) of the bottom of the fill well (Figure 22).

⚠ WARNING

Charging the battery produces gasses that can explode.

Never smoke near the battery and keep sparks and flames away from battery.

4. Connect a 3 to 4 amp battery charger to the battery posts. Charge the battery at a rate of 3 to 4 amps until the specific gravity is 1.250 or higher and the temperature is at least 16 degrees C (60 degrees F) with all cells gassing freely.
5. When the battery is charged, disconnect the charger from the electrical outlet and battery posts.

Note: After the battery has been activated, add only distilled water to replace normal loss, although maintenance-free batteries should not require water under normal operating conditions.

WARNING

CALIFORNIA Proposition 65 Warning

Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Wash hands after handling.

⚠ WARNING

Battery terminals or metal tools could short against metal tractor components causing sparks. Sparks can cause the battery gasses to explode, resulting in personal injury.

- **When removing or installing the battery, do not allow the battery terminals to touch any metal parts of the tractor.**
- **Do not allow metal tools to short between the battery terminals and metal parts of the tractor.**

Operating Tips

- Connect the clevis hitch of the ProPass to the tow vehicle. Use a high-strength hitch pin approved for tow vehicles.
- Turn on the fuel valve, place the throttle lever at half throttle, engage the choke, and start the engine. Once the engine starts, turn off the choke and increase the throttle to maximum.
- Test the ProPass operation. Ensure that there are no hydraulic leaks and make any additional adjustments.
- After testing the hydraulic system, check the hydraulic fluid and add more if required.

Note: Ensure that the pendant and any cords do not drag on the ground during operation.

Notes:

Notes:

Declaration of Incorporation

The Toro Company, 8111 Lyndale Avenue South, Bloomington, MN, USA declares that the following unit(s) conform(s) to the directives listed, when installed in accordance with the accompanying instructions onto certain Toro models as indicated on the relevant Declarations of Conformity.

Model No.	Serial No.	Product Description	Invoice Description	General Description	Directive
44713	315000001 and Up	Hydraulic Power Pack	PROPASS HYD POWER PACK	Hydraulic Power Pack	2006/42/EC 2004/108/EC

Relevant technical documentation has been compiled as required per Part B of Annex VII of 2006/42/EC.

We will undertake to transmit, in response to requests by national authorities, relevant information on this partly completed machinery. The method of transmission shall be electronic transmittal.

This machinery shall not be put into service until incorporated into approved Toro models as indicated on the associated Declaration of Conformity and in accordance with all instructions, whereby it can be declared in conformity with all relevant Directives.

Certified:



David Klis
Sr. Engineering Manager
8111 Lyndale Ave. South
Bloomington, MN 55420, USA
December 18, 2014

Authorized Representative:

Marcel Dutrieux
Manager European Product Integrity
Toro Europe NV
Nijverheidsstraat 5
2260 Oevel
Belgium

Tel. +32 16 386 659

International Distributor List

Distributor:	Country:	Phone Number:	Distributor:	Country:	Phone Number:
Agrolanc Kft	Hungary	36 27 539 640	Maquiver S.A.	Colombia	57 1 236 4079
Balama Prima Engineering Equip.	Hong Kong	852 2155 2163	Maruyama Mfg. Co. Inc.	Japan	81 3 3252 2285
B-Ray Corporation	Korea	82 32 551 2076	Mountfield a.s.	Czech Republic	420 255 704 220
Casco Sales Company	Puerto Rico	787 788 8383	Mountfield a.s.	Slovakia	420 255 704 220
Ceres S.A.	Costa Rica	506 239 1138	Munditol S.A.	Argentina	54 11 4 821 9999
CSSC Turf Equipment (pvt) Ltd.	Sri Lanka	94 11 2746100	Norma Garden	Russia	7 495 411 61 20
Cyril Johnston & Co.	Northern Ireland	44 2890 813 121	Oslinger Turf Equipment SA	Ecuador	593 4 239 6970
Cyril Johnston & Co.	Republic of Ireland	44 2890 813 121	Oy Hako Ground and Garden Ab	Finland	358 987 00733
Equiver	Mexico	52 55 539 95444	Parkland Products Ltd.	New Zealand	64 3 34 93760
Femco S.A.	Guatemala	502 442 3277	Perfetto	Poland	48 61 8 208 416
ForGarder OU	Estonia	372 384 6060	Pratoverde SRL.	Italy	39 049 9128 128
G.Y.K. Company Ltd.	Japan	81 726 325 861	Prochaska & Cie	Austria	43 1 278 5100
Geomechaniki of Athens	Greece	30 10 935 0054	RT Cohen 2004 Ltd.	Israel	972 986 17979
Golf international Turizm	Turkey	90 216 336 5993	Riversa	Spain	34 9 52 83 7500
Guandong Golden Star	China	86 20 876 51338	Lely Turfcare	Denmark	45 66 109 200
Hako Ground and Garden	Sweden	46 35 10 0000	Solvart S.A.S.	France	33 1 30 81 77 00
Hako Ground and Garden	Norway	47 22 90 7760	Spypros Stavrinides Limited	Cyprus	357 22 434131
Hayter Limited (U.K.)	United Kingdom	44 1279 723 444	Surge Systems India Limited	India	91 1 292299901
Hydroturf Int. Co Dubai	United Arab Emirates	97 14 347 9479	T-Markt Logistics Ltd.	Hungary	36 26 525 500
Hydroturf Egypt LLC	Egypt	202 519 4308	Toro Australia	Australia	61 3 9580 7355
Irrimac	Portugal	351 21 238 8260	Toro Europe NV	Belgium	32 14 562 960
Irrigation Products Int'l Pvt Ltd.	India	0091 44 2449 4387	Valtech	Morocco	212 5 3766 3636
Jean Heybroek b.v.	Netherlands	31 30 639 4611	Victus Emak	Poland	48 61 823 8369

European Privacy Notice

The Information Toro Collects

Toro Warranty Company (Toro) respects your privacy. In order to process your warranty claim and contact you in the event of a product recall, we ask you to share certain personal information with us, either directly or through your local Toro company or dealer.

The Toro warranty system is hosted on servers located within the United States where privacy law may not provide the same protection as applies in your country.

BY SHARING YOUR PERSONAL INFORMATION WITH US, YOU ARE CONSENTING TO THE PROCESSING OF YOUR PERSONAL INFORMATION AS DESCRIBED IN THIS PRIVACY NOTICE.

The Way Toro Uses Information

Toro may use your personal information to process warranty claims, to contact you in the event of a product recall and for any other purpose which we tell you about. Toro may share your information with Toro's affiliates, dealers or other business partners in connection with any of these activities. We will not sell your personal information to any other company. We reserve the right to disclose personal information in order to comply with applicable laws and with requests by the appropriate authorities, to operate our systems properly or for our own protection or that of other users.

Retention of your Personal Information

We will keep your personal information as long as we need it for the purposes for which it was originally collected or for other legitimate purposes (such as regulatory compliance), or as required by applicable law.

Toro's Commitment to Security of Your Personal Information

We take reasonable precautions in order to protect the security of your personal information. We also take steps to maintain the accuracy and current status of personal information.

Access and Correction of your Personal Information

If you would like to review or correct your personal information, please contact us by email at legal@toro.com.

Australian Consumer Law

Australian customers will find details relating to the Australian Consumer Law either inside the box or at your local Toro Dealer.



Toro General Commercial Product Warranty

A Two-Year Limited Warranty

Conditions and Products Covered

The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly warrant your Toro Commercial product ("Product") to be free from defects in materials or workmanship for two years or 1500 operational hours*, whichever occurs first. This warranty is applicable to all products with the exception of Aerators (refer to separate warranty statements for these products). Where a warrantable condition exists, we will repair the Product at no cost to you including diagnostics, labor, parts, and transportation. This warranty begins on the date the Product is delivered to the original retail purchaser.

* Product equipped with an hour meter.

Instructions for Obtaining Warranty Service

You are responsible for notifying the Commercial Products Distributor or Authorized Commercial Products Dealer from whom you purchased the Product as soon as you believe a warrantable condition exists. If you need help locating a Commercial Products Distributor or Authorized Dealer, or if you have questions regarding your warranty rights or responsibilities, you may contact us at:

Toro Commercial Products Service Department
Toro Warranty Company
8111 Lyndale Avenue South
Bloomington, MN 55420-1196

952-888-8801 or 800-952-2740
E-mail: commercial.warranty@toro.com

Owner Responsibilities

As the Product owner, you are responsible for required maintenance and adjustments stated in your *Operator's Manual*. Failure to perform required maintenance and adjustments can be grounds for disallowing a warranty claim.

Items and Conditions Not Covered

Not all product failures or malfunctions that occur during the warranty period are defects in materials or workmanship. This warranty does not cover the following:

- Product failures which result from the use of non-Toro replacement parts, or from installation and use of add-on, or modified non-Toro branded accessories and products. A separate warranty may be provided by the manufacturer of these items.
- Product failures which result from failure to perform recommended maintenance and/or adjustments. Failure to properly maintain your Toro product per the Recommended Maintenance listed in the *Operator's Manual* can result in claims for warranty being denied.
- Product failures which result from operating the Product in an abusive, negligent, or reckless manner.
- Parts subject to consumption through use unless found to be defective. Examples of parts which are consumed, or used up, during normal Product operation include, but are not limited to, brake pads and linings, clutch linings, blades, reels, rollers and bearings (sealed or greasable), bed knives, spark plugs, castor wheels and bearings, tires, filters, belts, and certain sprayer components such as diaphragms, nozzles, and check valves, etc.
- Failures caused by outside influence. Conditions considered to be outside influence include, but are not limited to, weather, storage practices, contamination, use of unapproved fuels, coolants, lubricants, additives, fertilizers, water, or chemicals, etc.
- Failure or performance issues due to the use of fuels (e.g. gasoline, diesel, or biodiesel) that do not conform to their respective industry standards.

- Normal noise, vibration, wear and tear, and deterioration.
- Normal "wear and tear" includes, but is not limited to, damage to seats due to wear or abrasion, worn painted surfaces, scratched decals or windows, etc.

Parts

Parts scheduled for replacement as required maintenance are warranted for the period of time up to the scheduled replacement time for that part. Parts replaced under this warranty are covered for the duration of the original product warranty and become the property of Toro. Toro will make the final decision whether to repair any existing part or assembly or replace it. Toro may use remanufactured parts for warranty repairs.

Deep Cycle and Lithium-Ion Battery Warranty:

Deep cycle and Lithium-Ion batteries have a specified total number of kilowatt-hours they can deliver during their lifetime. Operating, recharging, and maintenance techniques can extend or reduce total battery life. As the batteries in this product are consumed, the amount of useful work between charging intervals will slowly decrease until the battery is completely worn out. Replacement of worn out batteries, due to normal consumption, is the responsibility of the product owner. Battery replacement may be required during the normal product warranty period at owner's expense. Note: (Lithium-Ion battery only): A Lithium-Ion battery has a part only prorated warranty beginning year 3 through year 5 based on the time in service and kilowatt hours used. Refer to the *Operator's Manual* for additional information.

Maintenance is at Owner's Expense

Engine tune-up, lubrication, cleaning and polishing, replacement of filters, coolant, and completing recommended maintenance are some of the normal services Toro products require that are at the owner's expense.

General Conditions

Repair by an Authorized Toro Distributor or Dealer is your sole remedy under this warranty.

Neither The Toro Company nor Toro Warranty Company is liable for indirect, incidental or consequential damages in connection with the use of the Toro Products covered by this warranty, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under this warranty. Except for the Emissions warranty referenced below, if applicable, there is no other express warranty. All implied warranties of merchantability and fitness for use are limited to the duration of this express warranty.

Some states do not allow exclusions of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Note regarding engine warranty:

The Emissions Control System on your Product may be covered by a separate warranty meeting requirements established by the U.S. Environmental Protection Agency (EPA) and/or the California Air Resources Board (CARB). The hour limitations set forth above do not apply to the Emissions Control System Warranty. Refer to the Engine Emission Control Warranty Statement supplied with your product or contained in the engine manufacturer's documentation for details.

Countries Other than the United States or Canada

Customers who have purchased Toro products exported from the United States or Canada should contact their Toro Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the Toro importer.