



**Groomer Kit**  
**Greensmaster® 3200/3250 Attachment**  
Model No. 04490

Form No. 3324-146 Rev A

**Installation Instructions**

# Setup

## Loose Parts

**Note:** Use this chart as a checklist to ensure that all parts necessary for assembly have been received. Without these parts, total setup cannot be completed. Quantities listed are for three cutting units.

Description	Qty.	Use
Tapered screw	6	Mounting the reel bearing housing
Drive coupler	3	Mount into the reel shaft
Snap ring	3	
Plug	3	Replaces the grease fitting in the reel bearing housing
Plastic shim	3	Mount to the reel bearing housing
Spacer, 1/2 in. long	6	
Tapered socket head screw	6	
Right-hand front roller bracket assembly	3	Mount to the cutting unit side plates
Left-hand front roller bracket assembly	3	
Flat washer, 5/16 in.	6	
Groomer reel assembly	3	Mounting the groomer reel to the pivot plate
Spacer, 0.482 in. long	3	
Key, 1/8 in. square	3	
Driven pulley	3	
Nut, M10	6	
Right-hand bearing housing assembly	1	Mounting the groomer reel to the bearing housing
Left-hand bearing housing assembly	2	
Pivot spacer, 1-7/8 in. long	3	
Flange head screw, M10 x 70 mm	3	
Right-hand drive housing assembly	1	Mounting the drive cover housing
Left-hand drive housing assembly	2	
Drive belt	3	

Description	Qty.	Use
Right-hand link bracket	2	Mount to the Greensmaster 3250 carrier frames if additional travel is required
Left-hand link bracket	2	
Carriage screw	4	
Capscrew	4	
Flat washer	4	
Locknut	4	
Parts catalog	1	
<i>Installation Instructions</i>	1	Rear before operating the machine.
Registration card	1	Fill out and return to Toro.

! **Caution** !

**If you leave the key in the ignition switch, someone could accidentally start the engine and seriously injure you or other bystanders.**

**Remove the key from the ignition and disconnect the wire from the spark plug before you do any maintenance. Set the wire aside so that it does not accidentally contact the spark plug.**

1. Disconnect and remove the cutting units from the traction unit and position them on a level work surface.
2. Remove the front roller and roller brackets from the cutting unit (Fig. 1). Retain the mounting hardware.

**Note:** If mounting the Groomer Kit on a cutting unit with a serial number prior to one of those listed below, a new shoulder bolt, eccentric bolt, and nuts must be purchased before the roller can be re-installed with the kit.


Model No. 04480	Serial No. 60656
Model No. 04481	Serial No. 60648
Model No. 04482	Serial No. 60697
Model No. 04483	Serial No. 60985

Order the following parts from your local authorized Toro Distributor:

Shoulder bolt (1)	Part No. 95-1618
Eccentric bolt (1)	Part No. 95-1617
Locknuts (2)	Part No. 33024-00

3. Remove the front roller from the roller brackets (Fig. 1). Retain the mounting set screws.

**Note:** The following instructions are for installing the kit on a cutting unit with the reel motor on the right side. Unless specified, reverse the procedure for cutting units with the motor on the left side.

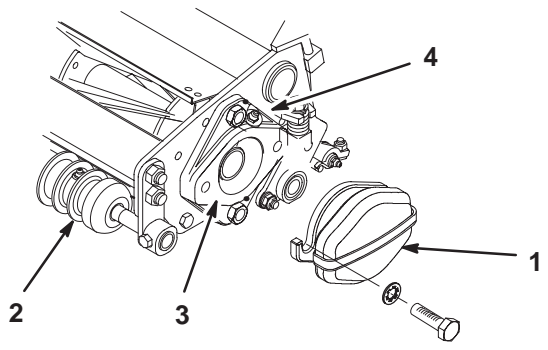

**Figure 1**


- |                  |                         |
|------------------|-------------------------|
| 1. Counterweight | 3. Reel bearing housing |
| 2. Front roller  | 4. Grease fitting       |

4. Remove the cutting unit counterweight (Fig. 1) and mounting capscrews.
5. Remove the 2 screws securing the reel bearing housing (Fig. 1) to the counterweight end of the cutting unit. If the screw heads are thick, replace them with tapered thin head screws, included in this kit.
6. Install the screws from the outside as shown in Figure 2. Secure them with the tapered nuts previously removed.

**Note:** Only replace the thick head screws on the counterweight end of the cutting unit.

7. Install the drive coupler and snap ring into the reel shaft (Fig. 2).

8. Remove the grease fitting (Fig. 1) from the reel bearing housing and replace it with a plug (Fig. 2).
9. Remove the special screw/grease fitting, flat washer, and spacer securing the drive pulley to the drive cover housing (Fig. 2). Retain all components for future assembly.
10. Remove the 2 socket head screws (M6 x 20 mm) and washers and locknut (M8) and washer securing the drive cover housing to the pivot plate assembly (Fig. 2).

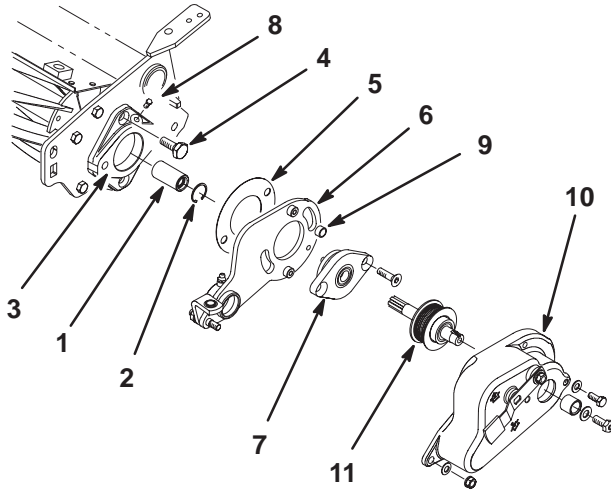


**Figure 2**

- |                         |                         |
|-------------------------|-------------------------|
| 1. Drive coupler        | 7. Pivot plate adapter  |
| 2. Snap ring            | 8. Plug                 |
| 3. Reel bearing housing | 9. Spacer, 1/2 in. long |
| 4. Tapered screw        | 10. Drive cover housing |
| 5. Plastic shim         | 11. Drive pulley        |
| 6. Pivot plate          |                         |

11. Mount a plastic shim, 2 spacers (1/2 in. long), pivot plate, and pivot plate adapter to the reel bearing housing with 2 tapered socket head screws. Tighten the screws firmly, yet allow the pivot plate to rotate freely.

**Note:** The spacer must pilot through the plastic shim.


12. Loosely mount the front roller and new right-hand and left-hand roller bracket assemblies to the cutting unit side plates with the mounting hardware previously removed or use the new hardware and 2 flat washers (5/16 in.) (included in this kit). Mount the roller in the Number 2 (standard) position as shown in Figure 3.

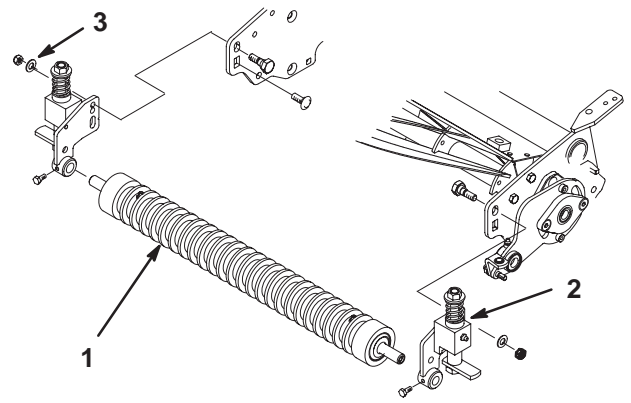

**Figure 3**

- |                             |                          |
|-----------------------------|--------------------------|
| 1. Front roller             | 3. Flat washer, 5/16 in. |
| 2. Left-hand roller bracket |                          |

13. On the right side of the cutting unit, remove the capscrew securing the shield rod to the side plate (Fig. 4).

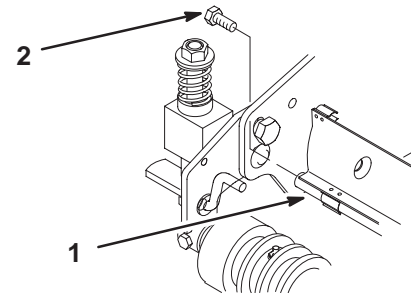

**Figure 4**

- |               |             |
|---------------|-------------|
| 1. Shield rod | 2. Capscrew |
|---------------|-------------|

14. Remove the cap plug w/grease fitting from the bearing housing (Fig. 5). Retain the cap plug for future assembly.


15. Insert the non-keyed end of the groomer reel shaft into the bearing housing (Fig. 5) while inserting the keyed end of the groomer reel shaft through the pivot plate bearing (Fig. 6).

16. Insert the pivot spacer through the bushings on the bearing housing (Fig. 5).

17. Insert the flange head capscrew (M10 x 70 mm) through the pivot spacer and secure it to the cutting unit side plate and shield rod (Fig. 5).

18. Secure the groomer shaft to the bearing housing with a locknut (M10) (Fig. 5).


19. Install the cap plug w/grease fitting into the hole in the bearing housing (Fig. 5).

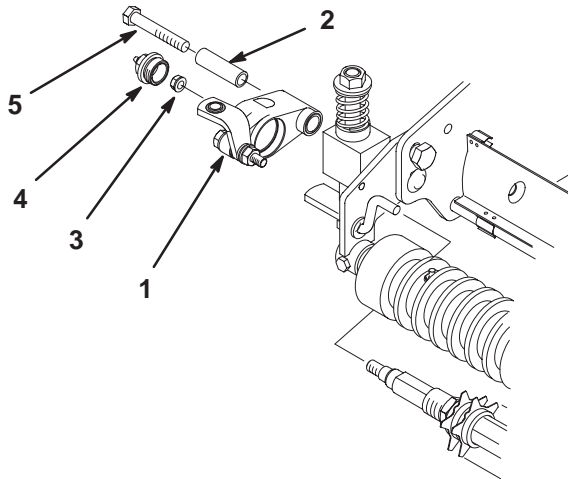

**Figure 5**

- |                                 |                                      |
|---------------------------------|--------------------------------------|
| 1. Bearing housing              | 4. Cap plug w/grease fitting         |
| 2. Pivot spacer, 1-7/8 in. long | 5. Flange head capscrew, M10 x 70 mm |
| 3. Locknut, M10                 |                                      |

20. Slide a spacer (0.482 in. long) onto the keyed shaft end (Fig. 6).

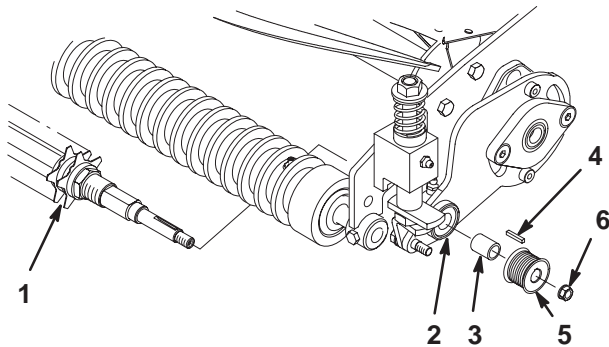

**Figure 6**

- |                           |                  |
|---------------------------|------------------|
| 1. Groomer reel           | 4. Key           |
| 2. Pivot plate            | 5. Driven pulley |
| 3. Spacer, 0.482 in. long | 6. Locknut, M10  |

21. Install the key (Fig. 6) into the shaft keyway and slide the driven pulley onto the shaft. Secure the assembly with a nut (M10).

22. Insert a hardened washer onto each adjusting bolt in the front roller bracket assemblies (Fig. 7 and 8).


23. Pivot the groomer reel assembly upward until the pivot brackets slide onto each adjusting bolt (Fig. 7 and 8).

24. Secure each pivot bracket to an adjusting bolt with a flat washer and locknut (Fig. 7 and 8).

**Important** Make sure that the adjusting bolts slide freely through the roller bracket housings. If binding occurs adjust as follows:


- A. Loosen the locknut on the bearing housing stud (Fig. 7) or the locknut on the pivot plate stud (Fig. 8).
- B. Using the tip of a screwdriver, align the pivot bracket until the adjustment bolt slides freely.
- C. If tension on the wave washer is loose, move one of the special washers to the other side of the assembly to keep tension on the wave washer.

**Important** The pivot brackets must slide easily onto the adjusting bolts. Do not use excessive force on the pivot brackets or bushings, as damage may result. If installation is difficult, check to ensure that the bushings swivel easily and are not damaged.

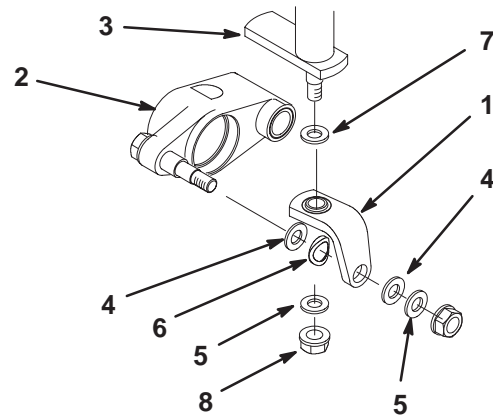

**Figure 7**


- |                                 |                              |
|---------------------------------|------------------------------|
| 1. Pivot bracket (black plated) | 5. Flat washer, 0.34 in.     |
| 2. Bearing housing              | 6. Wave washer               |
| 3. Adjusting bolt               | 7. Hardened washer, 0.37 in. |
| 4. Special washer, 0.45 in.     | 8. Locknut                   |

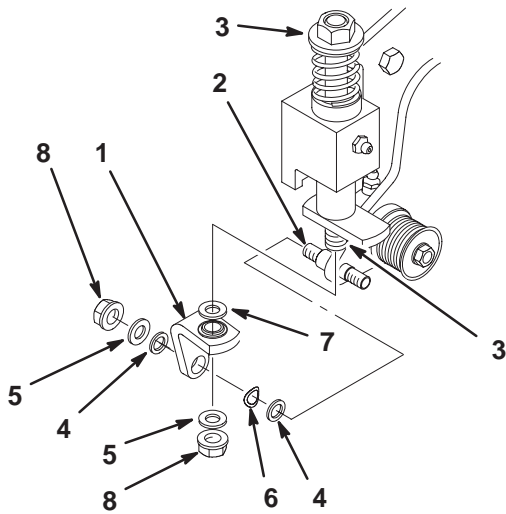

**Figure 8**

- |                                  |                              |
|----------------------------------|------------------------------|
| 1. Pivot bracket (yellow plated) | 5. Flat washer, 0.34 in.     |
| 2. Pivot plate stud              | 6. Wave washer               |
| 3. Adjusting bolt                | 7. Hardened washer, 0.37 in. |
| 4. Special washer, 0.45 in.      | 8. Locknut, M10              |

25. While lightly pulling forward on the front roller, rotate the upper-right roller bracket mounting bolt (eccentric) until the identification dot is positioned midway between up and down. Tighten both locknuts securing the roller bracket to the right sideplate (Fig. 9).

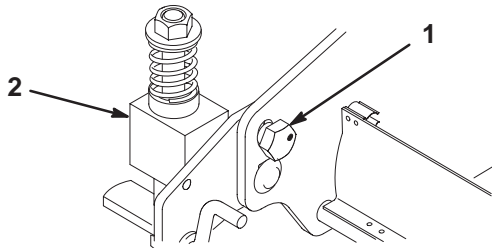


**Figure 9**

- |                            |                              |
|----------------------------|------------------------------|
| 1. Eccentric mounting bolt | 2. Right-hand roller bracket |
|----------------------------|------------------------------|

26. While lightly pulling forward on the front roller, tighten both locknuts securing the roller bracket to the left sideplate.

27. Insert the splined end of the drive pulley shaft through the adapter plate into the drive coupling (Fig. 10).

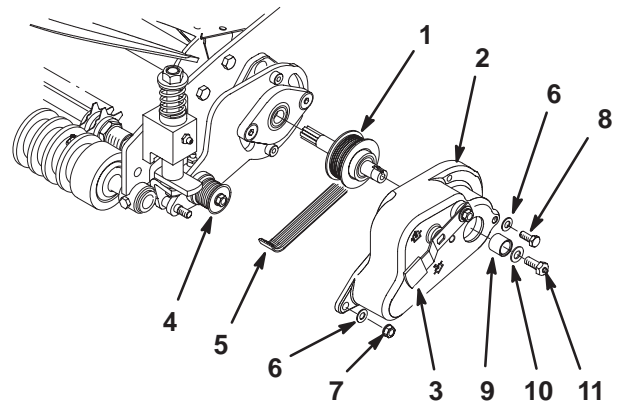

**Figure 10**

- |                        |                                  |
|------------------------|----------------------------------|
| 1. Drive pulley        | 7. Locknut, M8                   |
| 2. Drive cover housing | 8. Socket head screw, M6 x 20 mm |
| 3. Idler control lever | 9. Spacer, 5/8 in. long          |
| 4. Pivot plate stud    | 10. Screw w/grease fitting       |
| 5. Drive belt          |                                  |
| 6. Washer, 5/16 in.    |                                  |

28. Install the groomer drive belt onto the drive and driven pulleys.

29. Lift and rotate the idler control lever onto the pin (disengaged position) on the drive cover housing.

30. Position the drive cover housing over the drive pulley shaft, pulleys, and onto the pivot plate stud (Fig. 10).


**Note:** Make sure that the back side of the belt is against the idler pulley in the drive cover housing.

31. Secure the drive cover housing to the pivot plate with 2 socket head screws (M6 x 20 mm) and washers (Fig. 10). Also secure the housing to the pivot plate stud with a locknut (M8) and washer.

32. Insert a spacer (5/8 in. long) onto the drive shaft and secure it with a flat washer and special screw/grease fitting (Fig. 10).

33. Grease the 5 groomer fittings.

34. When installing the groomer kit and cutting unit on a Greensmaster 3200 traction unit, install the Pull Link Kit, Toro Part No. 94-9630, per the instructions supplied with the kit but do not use the center extension in the kit (Fig. 11). Adjust the pull link to the shortest length.

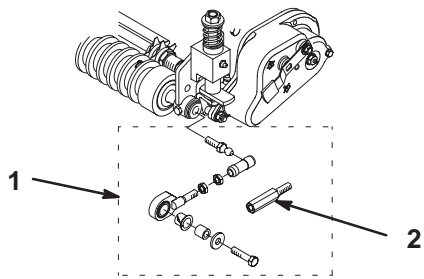


**Figure 11**

- 1. Pull link kit
- 2. Center extension (not used)

35. When installing the groomer kit and cutting unit on a Greensmaster 3000 or 3100 traction unit, install Groomer Adapter Kit, Toro Part No. 98-1463, per the instructions supplied with the kit.

36. When installing the groomer kit and cutting unit on a Greensmaster 3250 traction unit, additional travel can be attained by installing extension brackets to the **front** carrier frames (steps 37 through 40).


37. Mount the appropriate link bracket (right-hand or left-hand) and an anti-scalp roller to the end of each **front** carrier frame with a roller shaft and carriage screw. Position the brackets as shown in Figure 12.

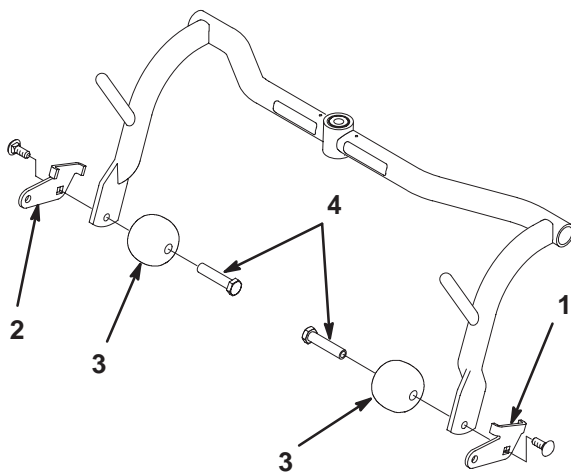

**Figure 12**

- 1. Left-hand link bracket
- 2. Right-hand link bracket
- 3. Roller
- 4. Roller shaft


38. Mount a pull link assembly to the outside of each link bracket with a capscrew, flat washer, nylon bushing, spacer, washer, and locknut. Position the components as shown in Figure 13. Make sure that the nylon bushing is in the pull link.

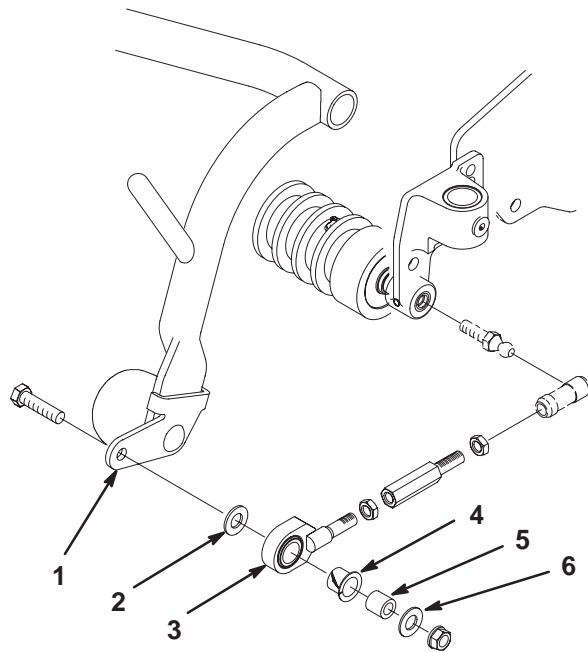

**Figure 13**

- 1. Left-hand link bracket
- 2. Flat washer
- 3. Pull link assembly
- 4. Nylon bushing
- 5. Spacer
- 6. Washer (thick)

39. Remove the pull arm extensions (Fig. 14) before installing the groomer in the rear (#1) position. Reassemble to the dimension shown in Figure 14. (Pull arm extension removed).

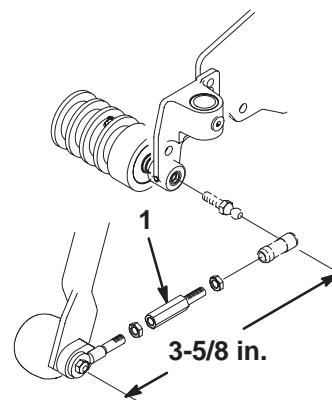

**Figure 14**


- 1. Rear pull arm extension

40. Adjust the pull links until there is 1/4 to 3/8 in. clearance between the lip of the basket and the reel blades. Make sure that the basket lips are equidistant from the reel blades all the way across the reel blades.

# Operation

## Introduction

Grooming is performed above the soil level. Grooming promotes vertical growth of the grass by cutting runners (stolons), removing thatch, and encouraging denser growth and deeper rooting. This can, in effect, yield a more even grass with less “grain” for faster and truer action of the golf ball.

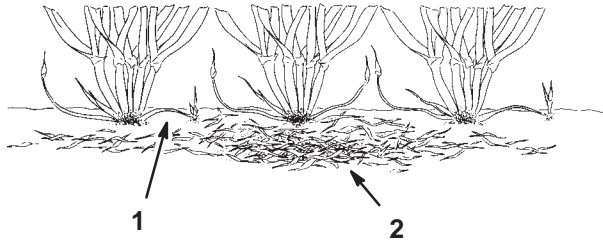

**Figure 15**

1. Grass runners                      2. Thatch

Grooming is similar to verti-cutting in its runner cutting action. Grooming blades however, should never penetrate the soil like verti-cutting or dethatching. Groomer blades are spaced closer together and are used more often than verti-cutters so that they are more effective in cutting runners and removing thatch. Verti-cutters are used primarily for greens renovation while groomers are used for ongoing greens upkeep.

It is difficult to make precise recommendations on use of grooming reels because so many variables affect the performance of grooming including:

- The time of the year (i.e., the growing season) and weather pattern
- The general condition of each green
- The frequency of grooming/cutting—both how many cutting per week and how many passes per cutting
- The height of cut setting on the main reel
- The height/depth setting on the grooming reel
- How long the grooming reel has been in use on this green
- The type of grass on the green
- The overall greens management program (i.e. irrigation, fertilizing, spraying, coring, over seeding, etc.)
- Traffic
- Stress periods (i.e., high temperatures, high humidity, unusually high traffic)

These factors can vary from golf course to golf course and from green to green. It is important, therefore, to inspect the greens frequently and vary the grooming practice in accordance with the need.

The groomer is set at the factory with 1/2 in. blade spacing. By removing spacers and adding blades or adding spacers and removing blades the groomer can be changed to 1/4 or 3/4 in. spacing.

Grooming with 1/4 in. blade spacing is recommended for fast growth periods (spring through early summer). Grooming with 3/4 in. blade spacing is recommended for slower growth periods (late summer through fall and winter). During high stress periods it may be desirable to not use the grooming reel.


**Note:** Grooming with 1/4 in. blade spacing will tend to remove more grass blades and thatch and cut more runners than grooming with 1/2 or 3/4 in. blade spacing. If grooming with 1/4 in. blade spacing, one or two groomings per week will probably be sufficient except during maximum growth periods.

**Note:** The practice of changing the direction of cut each time the green is cut should be continued when a groomer is used. This rotation will enhance the effects of the grooming.

## Controls

### Idler Control Lever

The idler control lever (Fig. 16) is used to engage and disengage the grooming reel. Do not engage the groomer while the cutting unit is running.

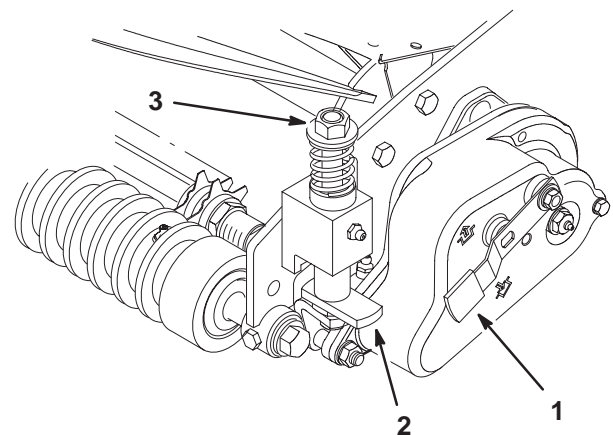

**Figure 16**

1. Idler control lever                      3. Adjusting bolt  
2. Quick adjust lever

## Adjusting Bolt

The adjusting bolt (Fig. 16) is used to adjust the grooming reel depth/height.

## Groomer Quick Adjust Lever

The groomer quick adjust lever (Fig. 16) is used in conjunction with the adjusting bolt to attain higher settings. It is also used to raise the grooming reel when grooming is not desired. Press down on the lever and rotate it to the front or side to raise or lower the grooming reel.

## Adjusting the Depth/Height

1. Make sure that the cutting unit rollers are clean.
2. Turn the cutting unit over and position it on a work surface.
3. Set the front roller brackets in the standard (#2) position and level the front roller; refer to the Cutting Unit Operator's Manual for the leveling procedure.
4. Adjust the cutting unit to the desired height of cut; refer to the chart below for available groomer settings at various cutting unit heights of cut.

Cutting Unit Height-of-Cut (inch)	Groomer Depth/Height Settings (inch)	
	Deepest	Highest
0.25	-0.1	+0.31
0.15	-0.125	+0.27
0.1	-0.14	+0.25

5. Rotate the quick adjust lever to the Down position for deeper settings and to the Up position for higher settings.

**Note:** Negative values indicate groomer blade penetration below the roller level. Positive values indicate groomer blade penetration above the roller level. Zero is roller level.

**Important** If the front roller brackets are positioned in either the #1 or #3 positions, the groomer settings will shift upward or downward respectively. Mowing/Grooming with the roller brackets set in the #4 position is not recommended.

6. On one end of the cutting unit, place a gauge bar across the front and rear rollers. Measure the distance from the lowest tip of a groomer blade to the gauge bar.
7. Repeat step 6 on the other end of the groomer reel. Go back to the first side and check/adjust the depth/height setting.
8. Install the cutting unit on the traction unit.

## Testing Groomer Performance

**Important** Improper or over-aggressive use of the grooming reel (i.e., too deep or too frequent grooming) may cause unnecessary stress on the turf, leading to severe greens damage. Use the groomer cautiously.

It is important to determine the performance of the groomer before putting it into regular use on greens. We strongly suggest that a formal test procedure be used. The following is a practical way of determining the proper height/depth setting:

1. Set the main cutting reels to the height of cut that would normally be used without the grooming reel. Use a Wiehle roller on the front and a full roller with scrapers on the rear (a Wiehle roller can be used on the rear at height of cut settings 3/16 in. or below, but this may result in a slightly deeper cut).
2. Set each of the grooming reels at a different setting as follows:
  - A. One groomer 1/32 in. above the roller level.
  - B. One groomer set to approximately one half the cutting unit height of cut setting.
  - C. One groomer disengaged and raised into the transport position.
3. Make a pass over the test green and look at the results. The cutting unit with the groomer set at one half the cutting unit height of cut will have removed more grass and thatch than the cutting unit with the groomer disengaged. The reel with the groomer set 1/32 in. above the roller level will have removed significantly more grass and thatch than the other two reels.
4. Examine the test green and determine if one of the two groomed areas gives the desired results. If not, lower and engage the third groomer, increase or decrease the height/depth of the groomers, and make another test pass. The amount of grass removed is a key indicator in determining the height/depth setting of the grooming reel.

Check the test green 2 or 3 days after the first grooming for general condition/damage. If the groomed areas are turning yellow/brown, and the non-groomed areas are green, then the grooming was too aggressive.

**Note:** The color of the grass will change when the grooming reel is used. This can be observed with the first grooming and will continue over time. Experience will allow the greens superintendent to judge by color of the turf (along with close examination) if the current grooming practice is appropriate for the particular green. Because the grooming reel stands up more grass and removes thatch, the quality of the cut will not be the same as without the groomer. This effect is most noticeable the first few times a groomer is used on a green.

**Note:** On multiple passes (i.e., double and triple cutting), the groomer will continue to penetrate deeper on each successive pass. Multiple passes are not recommended.


5. After testing the performance of the groomer on a test green and satisfactory results are obtained, grooming on the playing greens can begin. It is important to realize, however, that each green may respond differently to grooming. In addition, growing conditions are constantly changing. Inspect the groomed greens frequently and make adjustments to the grooming procedure as often as necessary.

## Using the Grass Baskets

The grooming reel will increase the amount of grass and thatch picked up. This means the grass baskets will have to be emptied more often.

To install the baskets:

1. Adjust the grooming reel to the maximum height.
2. Rotate the adjusting rods (Fig. 17) so that the top of each rod is 1/8 in. above the tops of the grooming reel blade. Tighten the adjusting rod nuts.
3. Readjust the groomer height/depth.
4. Install the baskets.

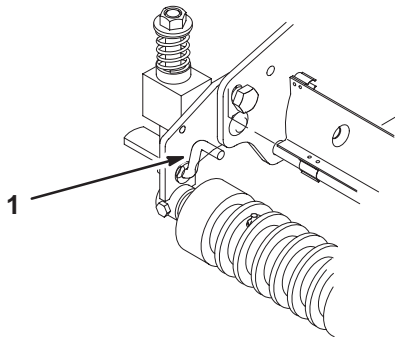

**Figure 17**

1. Adjusting rod

## Rollers

If the grooming reels are set to a negative depth relative to the rollers, the groomer will penetrate deeper than the cutting unit. Because of this, the groomer will cut into the base of the grass blade which is stickier. Grass will tend to build up on the rear roller faster than without the groomer. A rear roller scraper is strongly advised when grooming reels are used.

A Wiehle roller is recommended on the front when using a grooming reel. A Wiehle roller can also be used on the rear to avoid grass build up if the height of cut is at or below 3/16 in. If the height of cut is set over 3/16 in., then a full roller with scrapers is advised.

# Maintenance

## Cleaning

Hose off the grooming reel after use. Do not direct the water stream directly at the groomer bearing seals. Do not permit the grooming reel to stand in water so that the components rust.

## Lubricating

If the groomer is used every day, lubricate the 5 grease fittings weekly. Use a hand pump or grease gun (2 or 3 pumps maximum) (Fig. 18). Do not over grease as excess grease may cause seal failure.

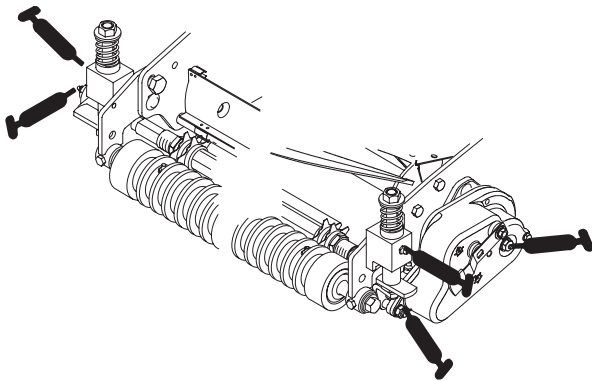


Figure 18

## Inspecting the Blade

Inspect the grooming reel blades frequently for damage and wear. Bent blades may be straightened with a pliers. Worn blades should be replaced. When inspecting the blades, check to see that the right and left blade shaft end nuts are tight.

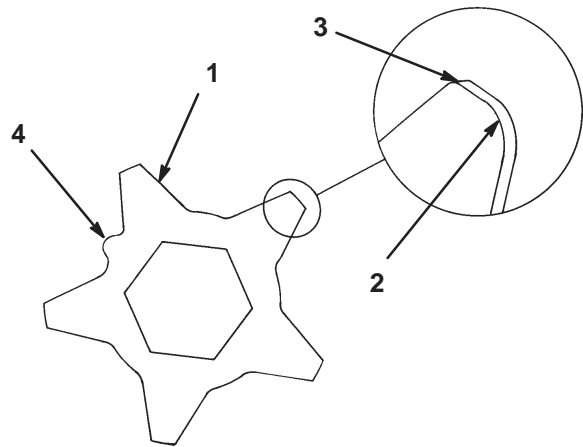


Figure 19

- |                   |                        |
|-------------------|------------------------|
| 1. Grooming blade | 3. Dull (rounded) edge |
| 2. Sharp edge     | 4. Location mark       |

**Note:** Because the groomer may introduce more debris (i.e., dirt and sand) into the cutting unit than what the reel would normally be exposed, the bedknife and main reel should be checked for wear more frequently. This is especially important in sandy soil and/or when the groomer is set for penetration.

## Replacing the Grooming Reel

The grooming reel can be removed to replace individual blades or replace entire shaft. Remove and replace the grooming reel shaft using the following procedure:

1. From the drive side of the cutting unit, remove the groomer drive cover housing, drive belt, driven pulley nut and pulley, key, and spacer (Fig. 20).


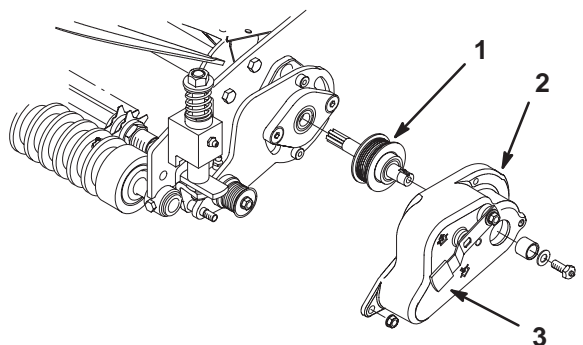


Figure 20

- |                        |                  |
|------------------------|------------------|
| 1. Drive pulley        | 3. Driven pulley |
| 2. Drive cover housing |                  |

2. On the opposite end of the cutting unit, remove the cap plug w/grease fitting, locknut retaining the reel shaft to the bearing housing, capscrew, and spacer retaining the bearing housing to the cutting unit (Fig. 21). Remove the groomer reel assembly.

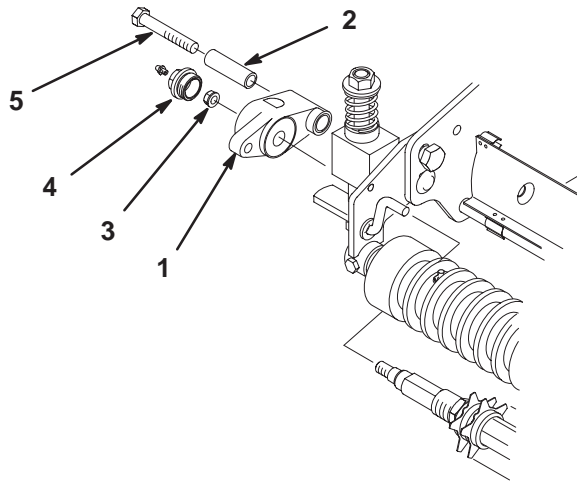

**Figure 21**

- |                    |                              |
|--------------------|------------------------------|
| 1. Bearing housing | 4. Cap plug w/grease fitting |
| 2. Pivot spacer    | 5. Capscrew                  |
| 3. Locknut         |                              |
- 

3. Assemble the shaft in reverse order. Using the location marks on each blade as a guide, assemble each blade so that the location mark is offset one flat on the hexagonal shaft.

**Note:** The location marks on each blade are offset so that they can be used to achieve proper grooming reel setup. Stack the blades and match the location marks before installing them on the groomer reel shaft.

4. Using a hand pump grease gun, lubricate the grooming reel shaft bearings with 2–3 pumps of grease.
5. Check the grooming reel height/depth setting.

