



Hydraulic Hose Kit

for Cutting Units for Greensmaster 3250 Traction Unit

Model No. 117-2721

Installation Instructions

Loose Parts

Use the chart below to verify that all parts have been shipped.

Description	Qty.	Use
Hydraulic hose assembly (106-9674)	2	
Hydraulic hose assembly (95-2908)	2	
Hydraulic hose assembly (95-2909)	2	
Hydraulic hose assembly (95-2907)	2	Install the kit.
Hydraulic hose assembly (105-5405)	2	
O-ring [ORFS-8] (237-30)	12	
O-ring [ORFS-4] (237-21)	6	

Installing the Kit



Hydraulic fluid escaping under pressure can penetrate skin and cause injury.

- Make sure all hydraulic fluid hoses and lines are in good condition and all hydraulic connections and fittings are tight before applying pressure to the hydraulic system.
- Keep your body and hands away from pin hole leaks or nozzles that eject high pressure hydraulic fluid.
- Use cardboard or paper to find hydraulic leaks.
- Safely relieve all pressure in the hydraulic system before performing any work on the hydraulic system.
- Get immediate medical help if fluid is injected into skin.

1. Locate and remove the hoses to be replaced as shown in Figure 1.

Note: When removing the old hoses, remember how they were routed through the components in the machine.

2. Replace the old hoses and O-rings with the appropriate new ones. The part number of each new hose is shown in Figure 1.

Important: Before installing any hydraulic hoses, make sure the correct O-rings are in position and lubricated with hydraulic oil.

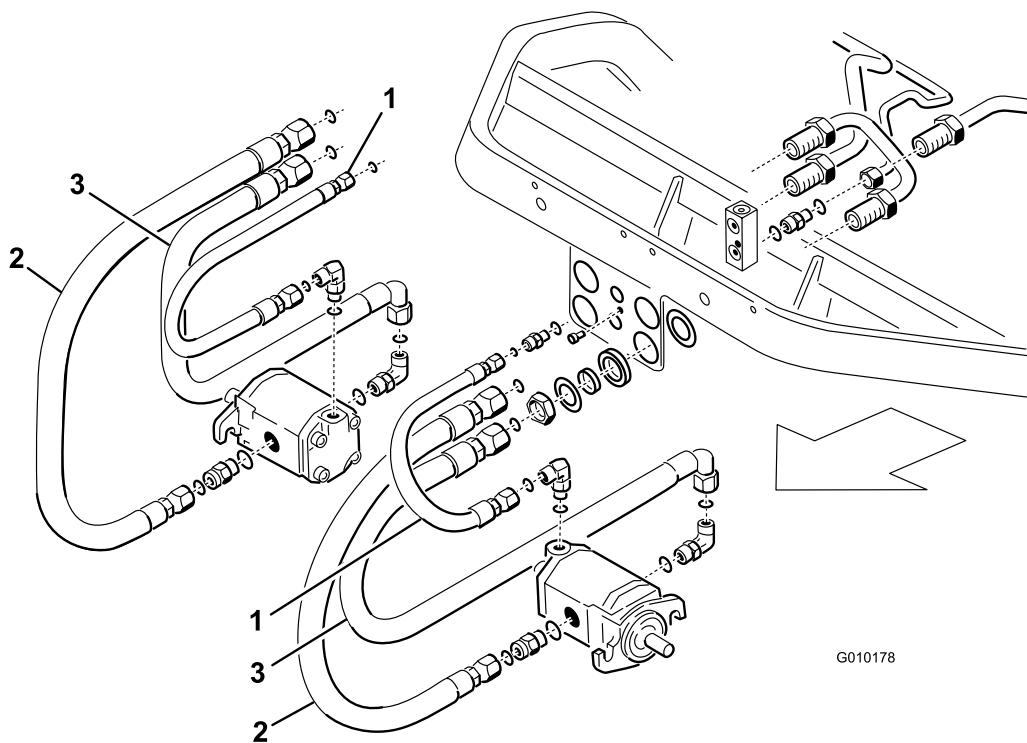
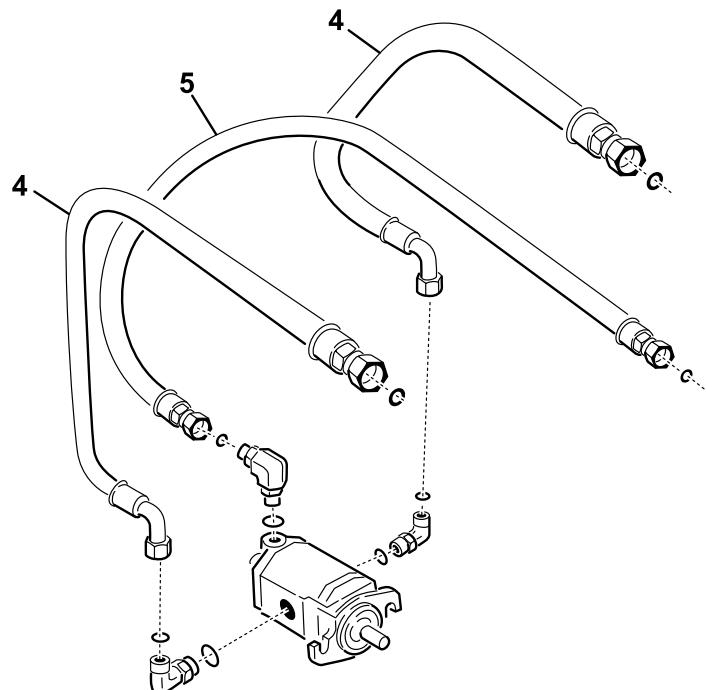


Figure 1

1. Hose 106-9674
2. Hose 95-2908

3. Hose 95-2909
4. Hose 95-2907

5. Hose 105-5405

G010178