

TORO

1958-59
**OWNER'S
OPERATING
AND PARTS
MANUAL**



18" SPORTLAWN

Price 25 cents

SERIAL NOS. 10018 - 500 AND UP
10019 - 101 AND UP




This Owner Manual has been especially prepared for your information and guidance in the operation and care of your new Toro mower. Information on care and operation of the engine is contained in a separate manual furnished with the engine.

Properly adjusted, operated and maintained, this Toro mower will respond quickly and easily to every

reasonable demand and give years of reliable service.

Toro mowers are manufactured by an organization of mowing machinery specialists with over forty years experience. Each machine is carefully inspected and tested before leaving the factory. For best performance from your Toro mower, study this manual for regular maintenance procedures.

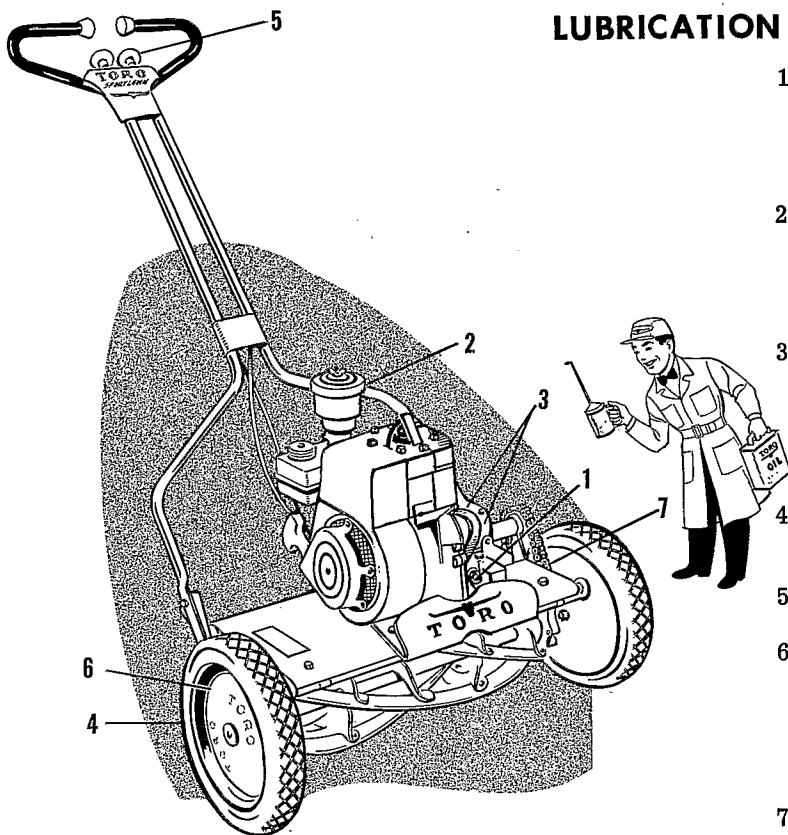

LUBRICATION POINTS

1. **ENGINE:** Use good grade S. A. E. 20 Motor Oil, change every 25 operating hours, more often under dusty conditions. Study engine manual for more explicit instructions.
2. **AIR CLEANER TO LEVEL MARK:** S. A. E. 20 Motor Oil every 25 hours, more often under dusty conditions. Study engine manual for more explicit instructions.
3. **COUNTERSHAFT AND CLUTCH:** Lubricating Oil, oil frequently. **IMPORTANT!** Put four or five drops of oil in oil cup on clutch slip ring. Do this each time mower is used. Never allow clutch to run oil dry. See reference 98, page 5.
4. **ROLLER BRACKETS:** Lubricating oil, oil frequently. See reference 37 & 42, page 5.
5. **CONTROL KNOBS:** Lubricating oil, oil sparingly.
6. **PINIONS, RING GEAR AND OILITE BUSHING:** At least once a year remove the wheels, repack the ratchet housing and gear teeth with gun grease. At the same time lubricate Oilite Bushing on spindle with good grade lubricating oil.
7. **SIDE PLATE OIL CUP:** Lubricating oil, do this each time mower is used.

TIPS ON LAWN MOWING

How you mow your lawn will greatly influence its health, vigor and appearance. Here are some fundamental suggestions that may help you.

HEIGHT OF CUT. The leaves carry "chlorophyll" which is responsible for the green color of the lawn. The leaves also are the "factory" where the plant manufactures its food. The number and amount of leaves (leaf mass) are a function of the species or type of grass, as well as the height of cut. Creeping or "runner" types of grass (Creeping Bent Grass, Bermuda Grass) will produce sufficient leaf surface at much lower heights of cut than will non-creeping types. Under most conditions, lawns should be clipped at a height of 1 to 1½ or 2 inches. Creeping Bent Grass and fine leaved bermudagrass make a better lawn when cut at ½ to ¾'s of an inch.

FREQUENCY OF MOWING. The frequency of cutting is as important as the height of cut. Lawn grasses should be cut often enough so that never more than ½ inch, preferably ¼ inch of leaf surface is removed at any one clipping. If more leaf surface is removed, the plant is "shocked" and will not grow properly until it recovers.

CLIPPINGS: When returned to the soil, clippings will provide plant food upon decomposition. They also act as a mulch; hence, retard evaporation. Clippings should be removed if too much leaf surface is being clipped; otherwise they may smother the grass. Removal of clippings is also recommended if the lawn has a tendency to develop "mat".

DIRECTION OF MOWING.


Lawn Areas: cut in different directions at each mowing.

Terraces: Cut up and down hill when mowing the crown. Also cut high (1½ - 2 inches) to help avoid erosion and evaporation.

MOWER. To maintain a well-groomed appearance, the lawn must always be cut with a sharp, properly adjusted mower. Dull, improperly adjusted mowers leave the lawn ragged and often the grass will turn gray and brown off on the leaf tips. Keep Your Mower Operating Properly.

OPERATING INSTRUCTIONS


ASSEMBLY INSTRUCTION

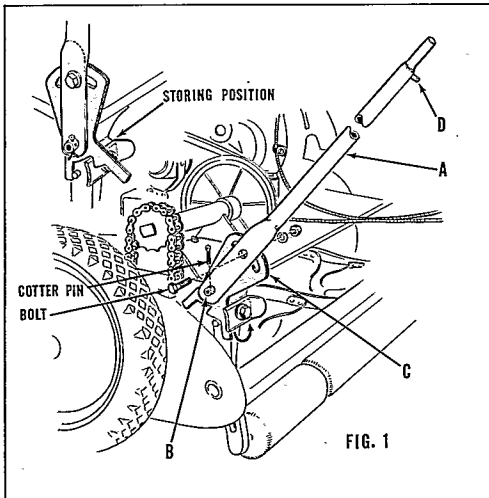

To prepare your new Sport Lawn for mowing, attach the lower handle section "A" to the mower frame by snapping it over the handle studs "B" as shown in Figure 1. Then bolt this section to the handle stop brackets "C" with the two short bolts you will find in the plastic bag attached to the mower. Be sure handle brace "D" at the upper end of this handle section "A" has the flange facing down. Then insert cotter keys in holes provided in handle studs "B". Note the storing position of the handle in Figure 1 showing the location of the handle stop bracket (Ref. 111) and the handle stop lever (Ref. 118) for this purpose. SCHEMATIC DRAWING ON PAGE 5 SHOWS THE PROPER RELATIONSHIP OF THE HANDLE PARTS.

After the lower handle section "A" has been mounted on your Sport Lawn, you are ready to connect the two handle sections together. First insert bolt "F" in the lower handle section "A," then guide upper handle section "E" into place on the lower half and fasten with the 5/16" nut and lockwasher provided in the plastic bag. When this has been done, put on cover plate "G" over the splice with the flange covering the nut and lockwasher. This is best done by putting the cover over one side and snapping it over the other. Figure 2 also shows the throttle and clutch controls "H" and "J" connected in their proper places. They are installed at the factory and come packed in the carton in this manner.

Tighten bolts, nuts and screws. It will pay you to go over your Sport Lawn occasionally, particularly when new. Do not tighten the two bed knife screws (Ref. 33) at each end of the bed bar except when adjusting.

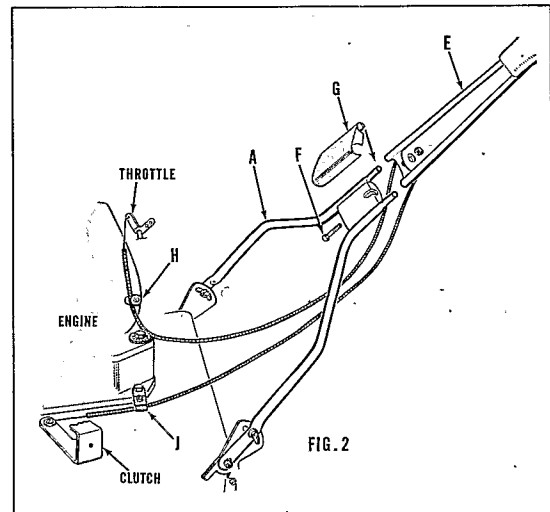

STARTING THE ENGINE

1. Fill the gas tank with regular gasoline. (Do not mix oil with the gasoline.)
2. See that the oil in crankcase of engine is up to filler plug. (Refer to the engine manual which is furnished with the machine.)
3. Open throttle lever about half way. Make sure that clutch is disengaged.
4. Wind starter rope around the engine starting pulley, close the carburetor choke lever and give starting rope a quick pull. When engine starts, open choke lever gradually. If trouble is experienced in starting the engine, refer to the engine manual furnished with each machine.
5. To stop the engine, close throttle and press grounding button on top of engine.
TO MOVE FORWARD: After starting engine push clutch control knob forward as far as it will go.
6. TO STOP: Pull clutch control knob full back.
7. Caution should be exercised when using the rope starter.
Be sure no person or persons are standing near enough to be injured by the backward swing of the starter rope.
8. When there is need to transport the power mower or "Power Handle" by motor vehicle, etc., we recommend draining of all gasoline and oil from the mower engine to eliminate fire hazard or possibility of spillage.


Caution

DO NOT REMOVE FOREIGN MATTER FROM CUTTING UNIT WITHOUT FIRST STOPPING THE ENGINE.



SERVICE INSTRUCTIONS

CHAIN ADJUSTMENT




The chain (Ref. 62, page 5) may be expected to loosen at first as the high spots are worn off. To tighten insert shims "A" between countershaft housing "B" and platform "C." This is easily done by loosening the four screws "D" holding the countershaft housing to the platform.

There should be a slight amount of slack in the chain when it is properly adjusted. Be sure you do not get it too tight. See Figure 3 for this adjustment.

ADJUSTING CUTTING HEIGHT

Your Toro Sport Lawn's height of cut can be adjusted by raising or lowering the rear roller. This is a very simple adjustment to make and requires only a few minutes.


1. Place your Sport Lawn on a hard level surface, such as a sidewalk or a cement driveway.
2. Loosen the carriage bolt nuts "A" at each end of the roller (Fig. 5).
3. Lower the roller to cut the grass higher or raise it to cut the grass shorter.
4. Be sure roller is adjusted to the same height on both sides, roller brackets "B" have gauge marks for this purpose. Then tighten the carriage bolt nuts firmly (Fig. 6 "E"). To determine exact cutting height, simply measure the distance between the ground and the cutting surface on the bed knife.

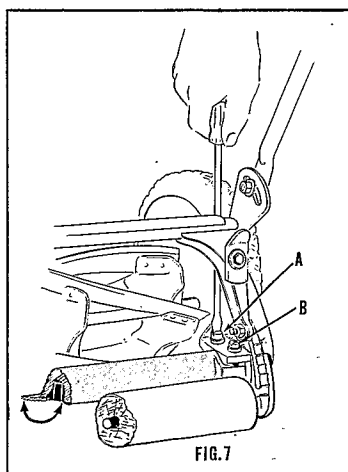

Raise the wheels off the ground by resting the mower on its rear roller.



Prepare a grinding compound of 1 oz. Silicon carbide (grit #120) and 1 oz. soap powder and water. Turn the reel backwards by rotating the wheel by

BELT ADJUSTMENT



It will be necessary to tighten the belt when the chain is adjusted. To do this, loosen bolts "B" that attach the motor to the platform and slide it forward "C" in the slotted holes. The belt should not be tightened any more than is necessary to prevent it from slipping when under load.

Tightening the belt too much will cause undue wear on the belt and may also make your Sport Lawn "creep" when the clutch is disengaged. **NOTE:** The clutch "A" should be engaged when the belt is being tightened. To engage the clutch when the engine is not running we recommend you follow these instructions: First disconnect spark plug lead wire. Then push in clutch control and pull on starter. You will hear a definite click when the clutch engages, then you are ready to adjust belt as shown in figure 4.

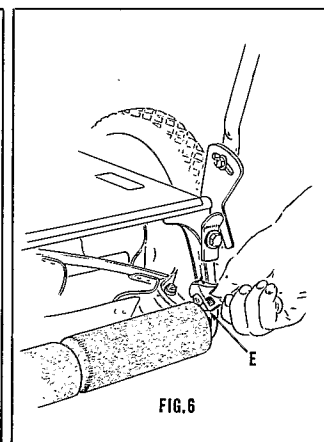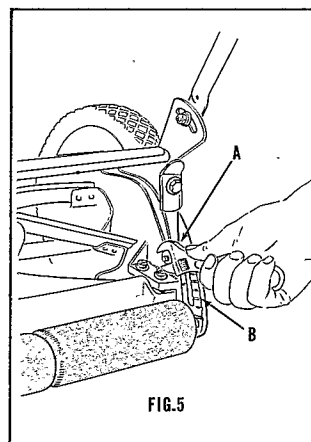

ADJUSTING BED KNIFE TO REEL

This is the most important adjustment on your Sport Lawn mower. It must be done with great care to insure ease of cutting and maximum service from the cutting parts. See Fig. 7.


1. To move the bed knife up against the reel blades, loosen the rear adjusting screw "B" and tighten the front adjusting screw "A."
2. Make this adjustment carefully at both ends of the bed knife, moving each screw only slightly (about 1/20th of a turn).
3. Tighten the rear screws ("B") firmly and revolve the reel. Repeat or reverse this adjustment procedure until the bed knife is in correct position.
4. Each blade should make very light contact all along the bed knife and cut paper for its full length.

CAUTION: IN NO CASE SHOULD BED KNIFE BEAR HEAVILY AGAINST THE REVOLVING REEL.

SHARPENING INSTRUCTIONS

hand. Apply the compound with a paint brush.

After several minutes of grinding, tighten the bed knife slightly and repeat the grinding operation until you can cut paper with all blades for their full length. Wash off all traces of the grinding compound.

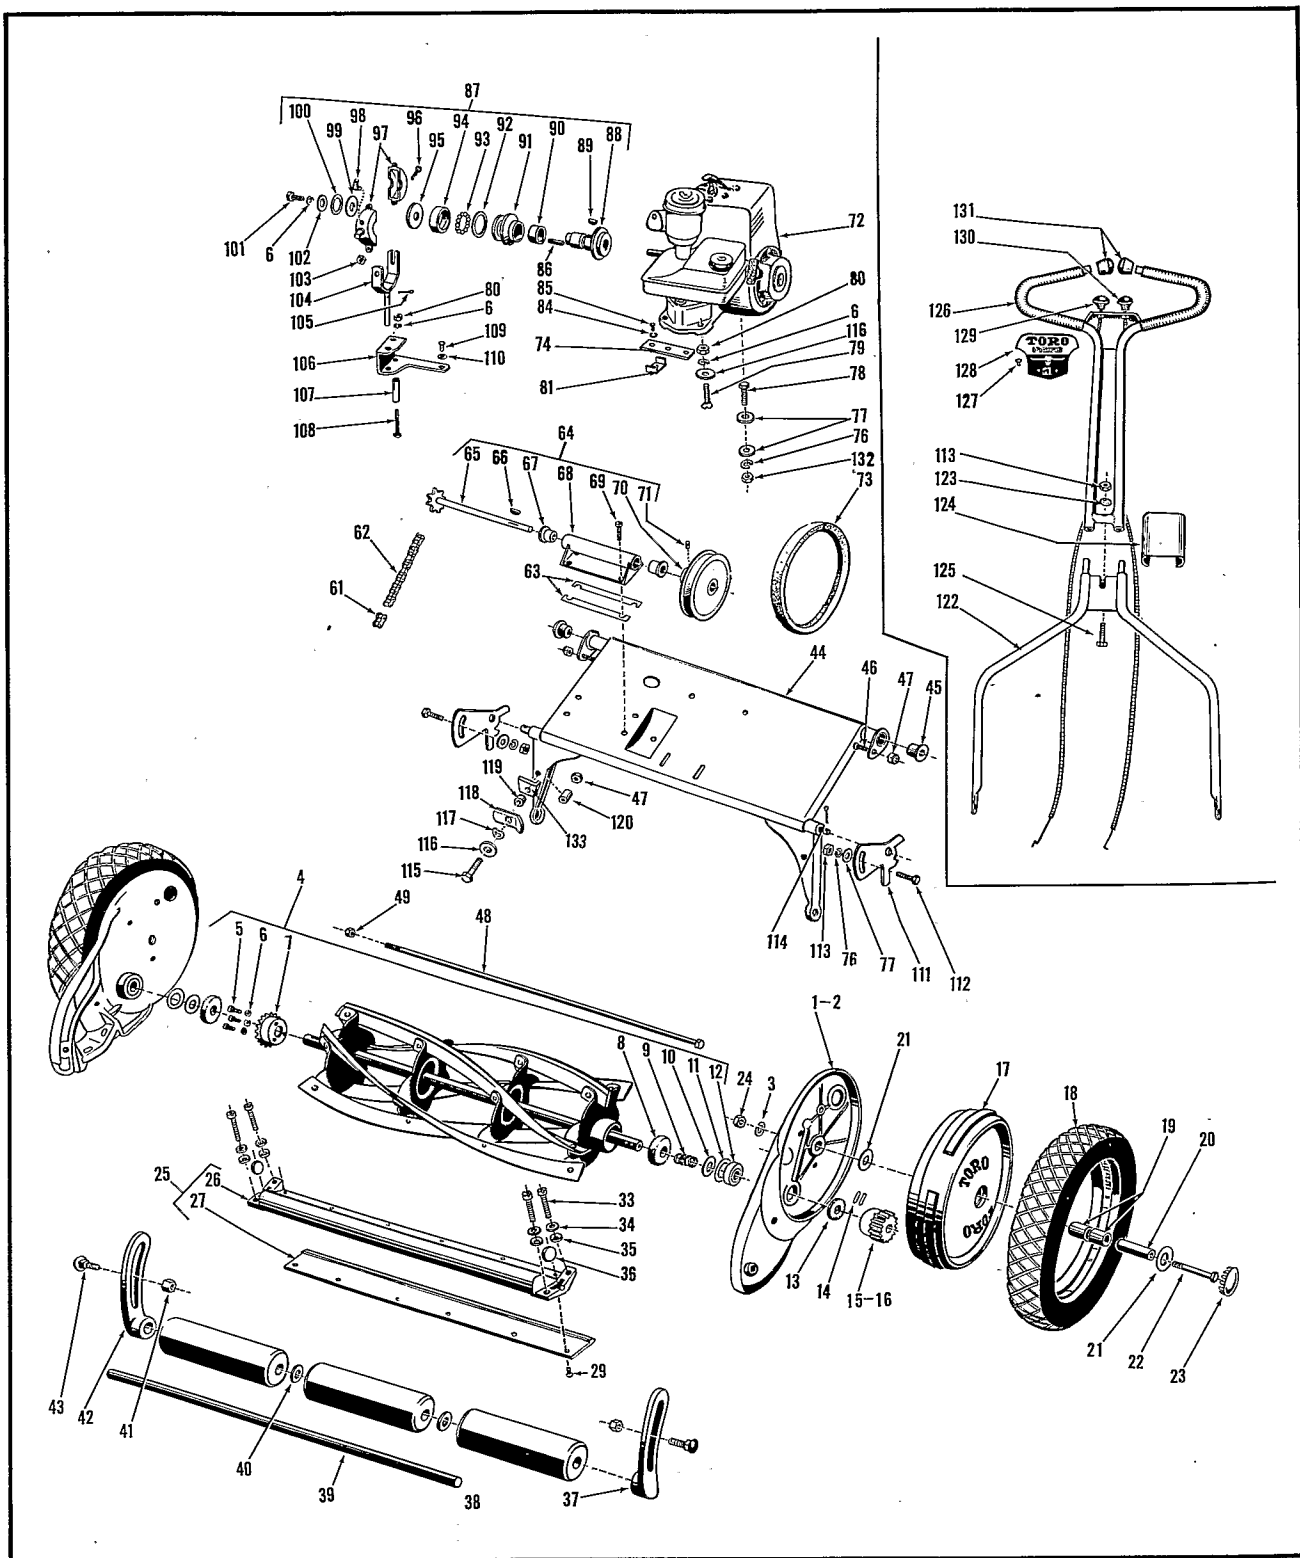

IMPORTANT ORDERING INSTRUCTIONS

To insure getting correct parts without delay, please furnish the following information:

1. Serial number of your mower as shown on the name plate.
2. Part number, description and quantity of each part required.
3. State whether parts should be shipped by mail or

express. All repair parts are shipped F.O.B. factory.

4. Name and address where parts are to be shipped.
5. Do not order by reference number; use part number only.
6. Repair parts are available from your Toro distributor or dealer.

PARTS LIST

| Ref. No. | Part No. | Description | No. Used |
|----------|-----------|--|----------|
| 1 | PDK-166 | Side Plate Assembly, Right consisting of side plate & outer Bearing Race | 1 |
| 2 | PDK-165 | Side Plate Assembly, Left consisting of side plate & outer Bearing Race | 1 |
| 3 | 3253-6 | Lockwasher, 7/16" Reg. | 2 |
| * | 301-2 | Oiler | 2 |
| 4 | PD-K-116A | Reel Assembly, 5 Blade | |
| * | 1-6729 | Reel Assembly, 6 Blade | |
| 5 | 32140-6 | Screw, $\frac{1}{4}$ " N. F. x 3/8" Rd. Hd. | 3 |
| 6 | 3253-3 | Lockwasher, $\frac{1}{4}$ " Reg. | 3 |
| 7 | PD75A | Reel Sprocket | 1 |
| *7A | PD23 | Spacer | 1 |
| 8 | D-225 | Felt Washer, inside | 2 |
| 9 | D-26 | Spring, Brg. take up | 1 |
| 10 | D-333 | Thrust Washer | 2 |
| 11 | D-334 | Seal | 2 |
| 12 | 251-30 | Bearing, Reel | 2 |
| 13 | YM-104 | Felt Washer, outer | 2 |
| * | DK-582 | Pinion Kit; Consists of reference numbers 14, 15 and 16 | |
| 14 | D-228 | Dog, Ratchet | 4 |
| 15 | D-327A-2 | Pinion, Reel Drive, Left | 1 |
| 16 | D-327A-1 | Pinion, Reel Drive, Rt. | 1 |
| 17 | PDK-217 | Wheel Assembly consisting of wheel & bushings | 2 |
| 18 | 4-2580 | Tire | 2 |
| 19 | 256-32 | Bushing | 4 |
| 20 | H-104 | Spindle, Wheel | 1 |
| 21 | D-342 | Washer, Wheel Spindle | 4 |
| 22 | D-343 | Bolt, Wheel Spindle | 2 |
| 23 | PD-506 | Plug Button | 2 |
| 24 | 3220-4 | Nut, 7/16" N. F. Jam, Plated | 2 |
| 25 | PD-K-13A | Bed Knife Bar Assembly consisting of bed knife, bed bar and rivets | 1 |
| 26 | PD-315B | Bed Bar | 1 |
| 27 | PD-316 | Bed Knife | 1 |
| 29 | 3262-10 | Rivet, Bed Knife | 6 |
| 33 | PD-7 | Adjusting Screw, bed bar | 4 |
| 34 | D-219 | Washer, upper spherical | 4 |
| 35 | D-218 | Washer, lower spherical | 4 |
| 36 | D-217 | Pivot, Bed Bar | 2 |
| * | PDK-155 | Roller Brkt. Set, Consists of Refs. 37 & 42 | |
| 37 | PD3330A-2 | Roller Bracket, right | 1 |
| 38 | PD-398 | Roller Section | 3 |

| Ref. No. | Part No. | Description | No. Used |
|----------|----------|---|----------|
| 39 | PD-399 | Roller Shaft | 1 |
| 40 | 3256-6 | Washer, $\frac{1}{2}$ " cut | 2 |
| 41 | PD-9 | Nut | 2 |
| 42 | PD330A-1 | Roller Bracket, left | 1 |
| 43 | 3230-6 | Bolt, 5/16" N. C. x 2" carriage | 2 |
| 44 | PD-302E | Motor Platform | 1 |
| 45 | D-211 | Spacer Tube End | 2 |
| 46 | 3258-21 | Screw, 5/16" N. F. x $\frac{3}{4}$ " | 2 |
| 47 | 3296-4 | Nut, 5/16" Elastic Stop | 2 |
| 48 | PD-312 | Tie Rod | 1 |
| 49 | 3296-32 | Nut, 3/8" N. F. Elastic Stop | 1 |
| 61 | 2710-21 | Link, connecting | 1 |
| 62 | PD-369 | Chain | 1 |
| 63 | PD-327-2 | Shim | 4 |
| 64 | PDK-22 | Countershaft Assembly | 1 |
| 65 | PD-368 | Countershaft & sprocket | 1 |
| 66 | 3257-5 | Key, #9 Woodruff | 1 |
| 67 | 256-34 | Bushing | 2 |
| 68 | PDK-23 | Countershaft Housing | 1 |
| 69 | 32113-18 | Screw, $\frac{1}{4}$ " N. F. x 5/8" | 4 |
| 70 | PD-364 | Pulley | 1 |
| 71 | 3245-1 | Set Screw | 1 |
| 72 | 221-68 | Engine, Briggs & Stratton 6BS | 1 |
| 73 | 271-17 | "V" Belt | 1 |
| 74 | PD-318A | Shim | 1 |
| * | PD-325 | Clutch Mounting Plate | 1 |
| 76 | 3253-4 | Lockwasher 5/16" Reg. | 3 |
| 77 | 3256-23 | Washer, 5/16" Cut | 6 |
| 78 | 3230-1 | Bolt, Carriage 5/16" N. C. x $\frac{3}{4}$ " | 2 |
| 79 | 3289-10 | Screw, $\frac{1}{4}$ " N. F. x 1-3/8" Flat Head | 2 |
| 80 | 3219-1 | Nut, $\frac{1}{4}$ " N. F. Full | 2 |
| 81 | PD-29 | Clip | 1 |
| 84 | 3253-12 | Lockwasher, #10 Reg. | 1 |
| 85 | 3251-2 | Screw, 10-24 x $\frac{1}{2}$ " mach. | 1 |
| 86 | PD-419 | Key, Square, $\frac{1}{8}$ x $\frac{1}{8}$ x 1" | 1 |
| 87 | PDK-128 | Clutch Assembly | 1 |
| 88 | PD-446A | Clutch Body Assembly | 1 |
| 89 | 3257-1 | Key, #3 Woodruff | 1 |
| 90 | PD-350A | Idler Bushing | 1 |
| 91 | PD-349 | Sliding Flange | 1 |
| 92 | PD-352 | Thrust Washer | 1 |
| 93 | 255-5 | Steel Balls | 18 |
| 94 | PD-351 | Shift Collar | 1 |
| 95 | PD-354 | Washer, Slip Ring | 1 |
| 96 | 3249-9 | Screw, 6-32 x 9/16" N. C. | 2 |
| 97 | PD-355-1 | Slip Ring | 1 |
| 97 | PD-355-2 | Slip Ring (Tapped) | 1 |
| 98 | PD-502 | Oil Cup | 1 |
| 99 | PD-353 | Check Washer | 1 |
| 100 | 32120-14 | Snap Ring | 1 |
| 101 | 329-6 | Screw, $\frac{1}{4}$ " N. F. x 1" | 1 |
| 102 | 4-8620 | Washer | 1 |
| 103 | 3296-9 | Nut, 6-32 N. C. Elastic Stop | 2 |
| 104 | PD-356A | Shift Fork Assembly | 1 |
| 105 | 3272-1 | Cotter Key, 1/16" x $\frac{1}{2}$ " | 1 |
| 106 | E-136A-1 | Bracket, Shift Fork | 1 |

*Not Illustrated

INSIST ON GENUINE TORO PARTS

PARTS LIST

| Ref. No. | Part No. | Description | No. Used |
|----------|----------|---|----------|
| 107 | E-137-1 | Spacer, Bracket | 1 |
| 108 | 329-15 | Screw, $\frac{1}{4}$ " N. F. x $2\frac{1}{2}$ " Lg. | 1 |
| 109 | 3251-6 | Screw, 10-24 x $\frac{1}{4}$ " N. C. | 1 |
| 110 | 3256-14 | Washer #10 | 1 |
| 111 | PD-17 | Bracket, Handle Stop | 2 |
| 112 | 3210-3 | Screw, 5/16" N. F. x $\frac{3}{4}$ " | 2 |
| 113 | 3219-2 | Nut, 5/16" N. C. Full | 2 |
| 114 | 3272-11 | Cotter Key, $\frac{1}{8}$ " x 1" | 2 |
| 115 | 3210-9 | Screw, 5/16" x 1-3/8" N. F. | 2 |
| 116 | 3265-2 | Washer, $\frac{1}{4}$ " Cut | 4 |
| 117 | 3290-213 | Spring Washer, 7/16" | 2 |
| 118 | PD-19 | Lever, Handle Stop | 2 |
| 119 | PD-503 | Spacer | 2 |
| 120 | PD-31A | Spacer | 2 |
| 122 | PD-85A | Lower Handle | 1 |
| 123 | 3254-2 | Lockwasher, 5/16" Shakeproof | 1 |
| 124 | PD-13A | Cover Plate | 1 |

| Ref. No. | Part No. | Description | No. Used |
|----------|-----------|--|----------|
| 125 | 3210-15 | Screw, 5/16" N. F. x 1-5/8 | 1 |
| 126 | PDK-255 | Upper Handle Assy. consisting of upper handle, plug buttons & Plastic Grip | 1 |
| 127 | 3259-1 | Screw, Drive #0 x 3/16" | 4 |
| 128 | PD-391B-2 | Handle, Name Plate | 1 |
| 129 | PD-395C | Throttle Control, including casing, wire & knob | 1 |
| * | PD-504 | Throttle Wire | 1 |
| 130 | PD-394D | Clutch Control, including casing, wire & knob | 1 |
| * | PD-505 | Clutch Wire | 1 |
| 131 | PD-25 | Handle Plug | 2 |
| 132 | 3296-31 | Nut, Lock 5/16" N. C. | 2 |
| 133 | PD-35-1 | Clip, Left | 1 |
| * | PD-35-2 | Clip, Right | 1 |

* Not Illustrated

Warranty

The Manufacturer warrants each new piece of equipment sold to be free of defects in material and workmanship. For ninety (90) days from the purchase date, Toro Manufacturing Corporation will repair or replace for the original purchaser, free of charge, through any Authorized Service Dealer, any part or parts found at our factory in Minneapolis, Minn., to be defective under normal use and service.

This Warranty does not obligate the Manufacturer to bear the cost of transportation charges in connection with the replacement or repair of

defective parts -- nor shall it apply to a machine upon which repairs or alterations have been made, unless authorized by the manufacturer.

This Warranty does not include nor cover standard accessories produced by other manufacturers (such as engines.) Such accessories have separate warranties by their respective manufacturers....and repair or exchange will be made on the basis of such warranties, and the policies authorized by them shall be adhered to.

This Warranty is in lieu of all other warranties expressed or implied.


INSIST ON GENUINE TORO PARTS

TORO


POWER MOWERS

Toro power mowers and Power Handle implements are designed and built to give years of precision performance . . . to make them "the best you can buy." And there's over 40 years of manufacturing experience to back them up. One of Toro's most important objectives — and one which has


helped make Toro the world's largest manufacturer of power mowers — is to provide the customer with complete local service and parts. This Toro has done through an extensive chain of service dealers, factory-trained to give you the most careful, competent care for your Toro work-saver.

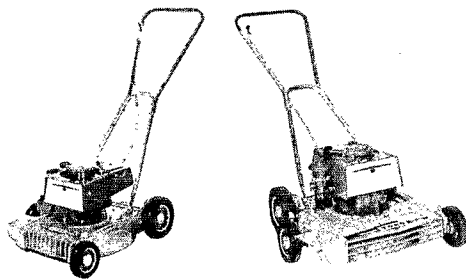


18" ROTARY




20" HAND PROPELLED
ROTARY




20" SELF-PROPELLED
ROTARY




20" SPORTLAWN




27" STARLAWN




PARK SPECIAL




27" PONY




24" SELF-PROPELLED ROTARY




31" GRASSKING

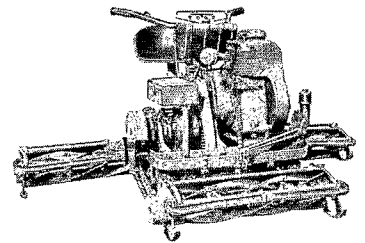


76" PROFESSIONAL




25" HOMELAWN




TILLER




AERATOR




22" ROTARY




SPRAYER




EDGER-TRIMMER




GENERATOR



PUMP



20" SPORTLAWN



17" SNOWHOUND

TORO
POWER HANDLE
IMPLEMENTS

DISTRIBUTED BY

LITHO IN U.S.A.