


TORO®

MODEL NO. 30156 - 10001 & up

**OPERATOR'S
MANUAL****PROLINE 156 MID SIZE MOWER**

To assure maximum safety, optimum performance, and to gain knowledge of the product, it is essential that you or any other operator of the machine read and understand the contents of this manual before the engine is ever started. Pay particular attention to the **SAFETY INSTRUCTIONS** highlighted by this symbol —



The safety alert symbol means **CAUTION, WARNING or DANGER** — personal safety instruction. Failure to comply with the instruction may result in personal injury.



FOREWORD

The Proline mid size mowers have advanced concepts in engineering, design and safety; and if maintained properly, will give excellent service.

Since this is a high-quality product, Toro is concerned about the future use of the machine and safety of the user. Therefore, read this manual to familiarize yourself with proper set-up, operation and maintenance instructions. The major sections of the manual are:


- | | | |
|------------------------|---------------------|----------------|
| 1. Safety Instructions | 3. Before Operating | 5. Maintenance |
| 2. Set-up Instructions | 4. Operation | |

Certain information in this manual is emphasized. DANGER, WARNING and CAUTION identify personal safety related information. IMPORTANT identifies mechanical information demanding special attention. Be sure to read this directive because it deals with the possibility of damaging a part or parts of the machine. NOTE identifies general information worthy of special attention.

TABLE OF CONTENTS

	Page		Page
SAFETY INSTRUCTIONS	2-3	Changing Crankcase Oil & Filter	10
SAFETY AND INSTRUCTION DECALS	4	Fuel Filter Replacement	11
SPECIFICATIONS	4	Replacing Spark Plug	12
LOOSE PARTS	5	Adjusting Carburetor	13
SET-UP INSTRUCTIONS	5-7	Adjusting and Replacing Traction Belt	13
BEFORE OPERATING	7-8	Adjusting Clutch	14
CONTROLS	9	Brake Adjustment	14
OPERATING INSTRUCTIONS	9	Drive Belt Replacement	14
MAINTENANCE	10-14	Cleaning Cooling System	14
Grease Wheels	10	WIRING SCHEMATIC	15
Grease Transmission Couplers	10	IDENTIFICATION AND ORDERING	15
Servicing Air Cleaner	10	THE TORO PROMISE	Back Cover

SAFETY INSTRUCTIONS

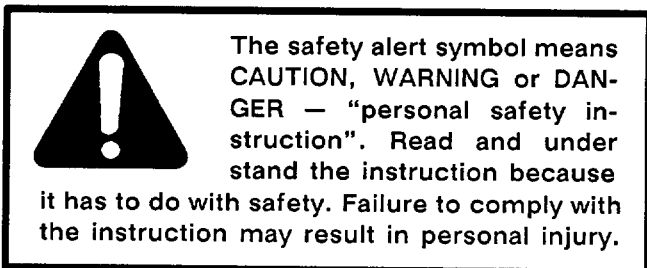

The Proline mid size mower was tested and certified by TORO for compliance with the B71.4 – 1984 specifications of the American National Standard Institute. Hazard control and accident prevention are dependent upon the awareness, concern, and proper training of the personnel involved in the operation, transport, maintenance, and storage of the machine. Improper use or maintenance of the machine can result in injury or death. To reduce the potential for injury or death, comply with the following safety instructions.

BEFORE OPERATING

1. Read and understand the contents of this Operator's Manual before operating the machine. Become

familiar with all controls and know how to stop quickly. A free replacement manual is available by sending complete Model and Serial Number to:

The Toro Company
8111 Lyndale Avenue South
Minneapolis, Minnesota 55420

2. Never allow children to operate the machine. Do not allow adults to operate machine without proper instruction. Only trained operators who have read this manual should operate this machine.
3. Never operate the machine when under the influence of drugs or alcohol.
4. Before attempting to start engine, shift into neutral and lock parking brake.
5. Remove all debris or other objects that might be picked up and thrown by the cutter blades. Keep all bystanders away from the mowing area.
6. Keep all shields and safety devices in place. If a shield, safety device or decal is illegible or damaged, repair or replace it before operation is commenced. Also tighten any loose nuts, bolts and screws to assure machine is in safe operating condition.

SAFETY INSTRUCTIONS

7. Do not operate machine while wearing sandals, tennis shoes, sneakers or shorts. Also, do not wear loose fitting clothing which could get caught in moving parts. Always wear long pants and substantial shoes. Wearing safety glasses, safety shoes and a helmet is advisable and required by some local ordinances and insurance regulations.

8. Fill fuel tank with gasoline before starting the engine. Avoid spilling gasoline. Since gasoline is flammable, handle it carefully.

- A. Use an approved gasoline container.
- B. Do not fill tank while engine is hot or running.
- C. Do not smoke while handling gasoline.
- D. Fill fuel tank outdoors and up to about one inch (25 mm) from top of the tank, not the filler neck.
- E. Wipe up any spilled gasoline.

WHILE OPERATING

9. Start engine when parking brake is set, blade is disengaged, and transmission is in neutral.

10. Do not run the engine in a confined area without adequate ventilation. Exhaust fumes are hazardous and could possibly be deadly.

11. Using the machine demands attention, and to prevent loss of control:

- A. Mow only in daylight or when there is good artificial light.
- B. Watch for holes or other hidden hazards.
- C. Do not drive close to a sand trap, ditch, creek or other hazard.
- D. Reduce speed when making sharp turns and when turning on hillsides.

12. The grass deflector must always be installed and in down position on the side discharge cutting unit, except when using the optional grass catcher. This product is designed to drive objects into the ground where they lose energy quickly in grassy areas. However, don't take an injury risk!! When a person or pet appears unexpectedly in or near the mowing area, STOP MOWING. Careless operation, combined with terrain angles, ricochets, or improperly positioned guards, can lead to thrown object injuries. Do not resume mowing until area is cleared. If the cutting unit discharge area ever plugs, shut engine off before removing the obstruction.

13. Never raise the cutting unit while the blades are rotating.

14. If the cutting blades strike a solid object or the machine vibrates abnormally, shut the engine off. Remove high tension wire from spark plug to prevent possibility of accidental starting. Check cutting unit and traction unit for damage and malfunctioning parts. Repair any damage before restarting the engine and operating the cutting unit. Be sure blades are in good condition and blade bolts are tight.

15. Cut grass slopes carefully. Do not start, stop, or turn suddenly.

16. Do not touch engine or muffler while engine is running or soon after it is stopped. These areas could be hot enough to cause a burn.

17. Before leaving the operator's position — behind handle or leaving mower unattended, shift transmission into NEUTRAL, apply parking brake and shut OFF engine.

MAINTENANCE

18. Disconnect wire from spark plug to prevent accidental starting of the engine when servicing, adjusting or storing the machine.

19. If tractor and mower must be tipped to perform maintenance or an adjustment, drain gasoline from fuel tank and oil from crankcase.

20. When driving unit forward, always use upper "Forward" traction drive handle. When backing up, always use lower "Reverse" traction drive handle.

21. To reduce potential fire hazard, keep the engine free of excessive grease, grass, leaves and accumulations of dirt.

22. Be sure machine is in safe operating condition by keeping nuts, bolts and screws tight. Check the blade mounting bolts and nuts frequently to be sure they are tightened to specification.

23. If the engine must be running to perform a maintenance adjustment, keep hands, feet, clothing and other parts of the body away from the cutting unit blades and other moving parts.

24. Do not overspeed the engine by changing governor settings. To be sure of safety and accuracy, have an Authorized TORO Proline Service Dealer check maximum engine speed with a tachometer.

25. Engine must be shut off before checking oil or adding oil to the crankcase.

26. Allow engine to cool before storing mower in any enclosure such as a garage or storage shed. Make sure the mower fuel tank is empty if machine is to be stored in excess of 30 days. Do not store mower near any open flame or where gasoline fumes may be ignited by a spark. Always store gasoline in a safety-approved, red metal container.

SAFETY INSTRUCTIONS

27. Perform only those maintenance instructions described in this manual. If major repairs are ever needed or assistance is desired, contact an Authorized Toro Proline Service Dealer. To ensure optimum performance and safety, always purchase genuine TORO replacement parts and accessories to keep the Toro


all TORO. NEVER USE "WILL-FIT" REPLACEMENT PARTS AND ACCESSORIES MADE BY OTHER MANUFACTURERS. Look for the TORO logo to assure genuineness. Using unapproved replacement parts and accessories could void the warranty of The Toro Company.

SAFETY AND INSTRUCTION DECALS


The following decals are installed on the machine. If any become damaged or illegible, replace it. The decal part number is listed below and in your parts catalog. Replacement can be ordered from your Authorized Toro Distributor.



ON UPPER CONTROL BAR
(Part No. 82-2290)




ON LOWER CONTROL BAR
(Part No. 82-2280)

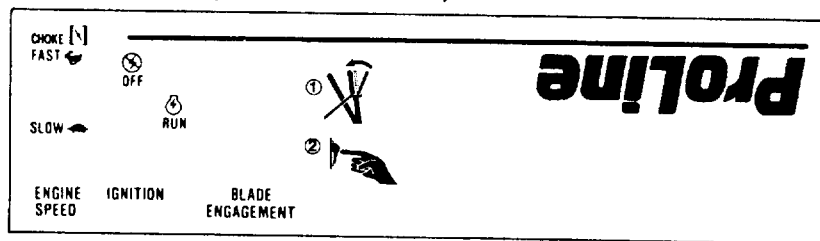

ON CONTROL PANEL
(Part No. 82-7730)




ON CONTROL PANEL
(Part No. 71-1280)



ON CONTROL PANEL
(Part No. 65-3080)



ON REAR FRAME
(Part No. 74-0490)

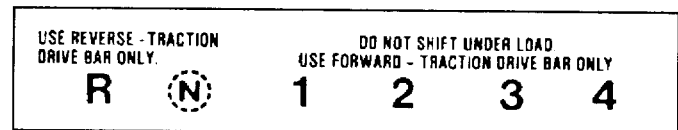

ON CONTROL PLATE
(Part No. 82-7750)

SPECIFICATIONS

12 hp Kohler Engine: four cycle, recoil start with automatic compression release, vertical shaft engine has output of 12.5 hp @ 3600 RPM and 21 .3 ft-lb torque @ 2500 RPM. Displacement is 24.3 cubic inches. Crankcase oil capacity is 4 pints w/ filter and fuel tank Capacity is 5 gallons. Correct spark plug is Champion RC12 YC or equivalent. Spark arrester muffler.

Frame: 11 ga. formed steel box with 1 in. dia. axle with 1/4" x 4 U-strap rear frame bolted to frame.

Wheels and Tires: 6.5 x 13 pneumatic tires are mounted on welded steel wheels which have greaseable ball bearings. Recommended tire pressure is 15 psi.

Transmission: Permanently lubricated and fully enclosed gear box. In line shift pattern with 4 forward speeds, neutral and reverse.

Traction Drive Belts: A-section, V-belt with 3 in. dia. take up idler to gear box from engine. 2 rib A-section

banded belt to each wheel from gear box output shafts.

Gear Drive Reduction:

1st gear - 7.0
2nd gear - 4.5
3rd gear - 3.5
4th gear - 3.0
Rev. - 6.0

Ground Speed @ 3200 Engine rpm:

1st gear - 1.9 MPH
2nd gear - 3.0 MPH
3rd gear - 3.9 MPH
4th gear - 4.5 MPH
Rev. - 2.2 MPH

Optional Accessories:

Sulky attachment, Model #30122
Sulky attachment, Model #30123

Specifications and design subject to change without notice.

LOOSE PARTS

NOTE: Use this chart as a checklist to assure all parts have been received. Without these parts, total set-up cannot be completed.

Description	Qty.	Use
Upper Handle	1	Install Upper Handle To Frame.
Flange Capscrew 3/8 – 16 X 1" Lg.	4	
Flangenut 3/8-16	4	
Shift Lever	1	Install Shift Lever To Transmission
Shift Lever Mounting Block	1	
Plain Washer	1	
Capscrew 1/4 – 28 X 2" Lg.	1	
Rod Fitting	2	Install Control Rods
Clevis Pin	2	
Washer	2	
Hairpin Cotter	2	
Fuel Tank	1	Install Fuel Tank And Control Panel
Control Panel	1	
Capscrew 5/16 – 18 X 7/8" Lg.	4	
Lockwasher 5/16	4	
Flatwasher 5/16	4	
Hose Clamp	2	
Self Tapping Screw	1	Connect Wire Harness
Star washer	1	
Cable Tie	2	
Operator's Manual	1	Read Before Operating Machine
Parts Catalog	1	
Registration Card	1	Fill Out And Return To Toro

SET-UP INSTRUCTIONS

MOUNT FUEL TANK AND CONTROL PANEL

1. Position fuel tank onto rear frame aligning mounting holes as shown in Fig. 1.

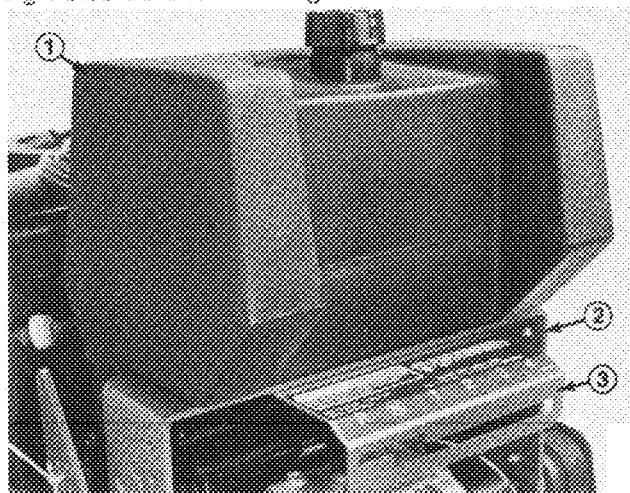


Figure 1

1. Fuel tank
2. Rear frame
3. Control panel

2. Loosely mount control panel to bottom of rear frame and fuel tank with (4) capscrews, lockwashers and washers (Fig. 1 & 2). Do not tighten capscrews at this time.

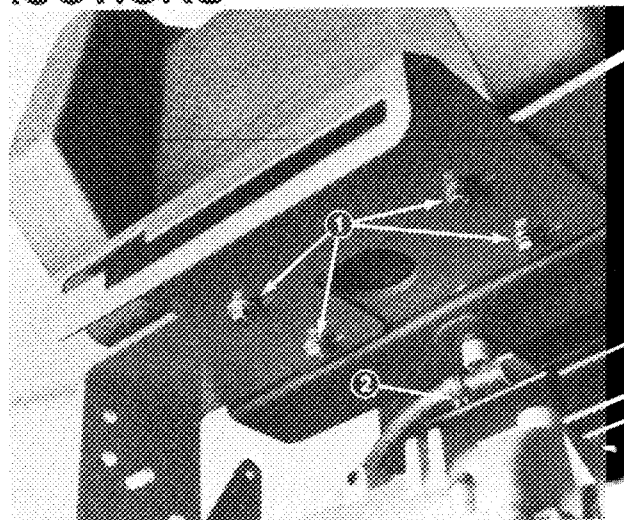


Figure 2

1. Capscrews, lockwashers & washers
2. Fuel line hose clamps

3. Secure fuel line to tank fitting with hose clamp (Fig. 2).

INSTALL SHIFT LEVER

1. Position shift lever mounting block onto shaft on top of transmission. DO NOT remove rubber washer on transmission.

SET-UP INSTRUCTIONS

2. Insert shift lever thru slot in control panel and align mounting hole in lever with mounting block on transmission. Secure lever to transmission with 1/4-28 x 2" lg. capscrew and plain washer. Torque capscrew to 100-125 in - lb (Fig. 3).

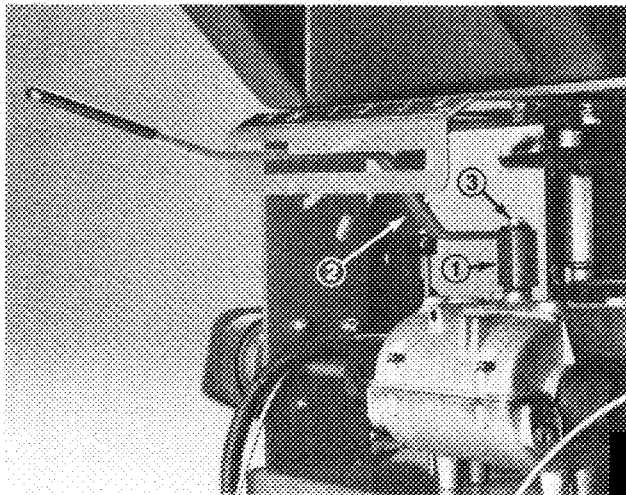


Figure 3

1. Shift lever mounting block
2. Shift lever
3. Capscrew & washer

3. Move shift lever to reverse and 4th gear. Control panel mounting holes are slotted to enable it to be moved from side to side (Fig. 2). Position control panel as needed to achieve full shift range. Tighten mounting screws to a maximum of 90 in - lb. **DO NOT OVER TIGHTEN.**

INSTALL UPPER HANDLE

1. Align upper handle mounting holes with desired mounting holes in frame (upper or lower set of holes) and secure each side with (2) 3/8 -16 x 1" lg. flange capscrews and flange nuts (Fig. 4).

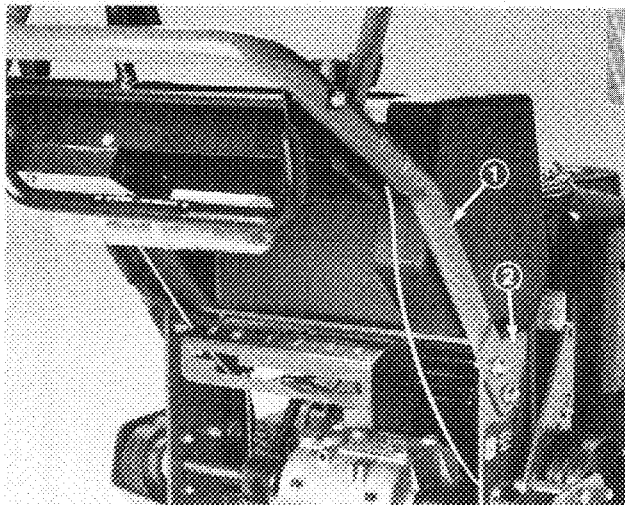


Figure 4

1. Upper handle
2. Frame

CONNECT THROTTLE CABLE

1. Place remote control lever in FAST position.
2. Hook wire Z-bend into hole of speed control lever (Fig. 5).

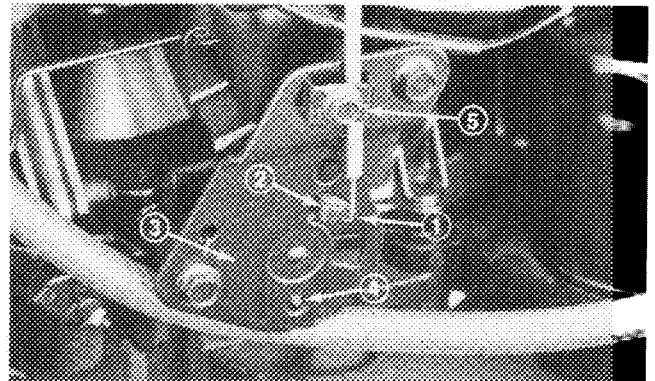


Figure 5

1. Wire Z-bend
2. Speed control lever
3. Base plate
4. Aligned holes
5. Cable clamp

3. Loosen cable clamp screw allowing cable installation, but do not tighten (Fig. 5).

4. Move control cable casing and wire until hole in speed control lever is aligned with hole in base plate.

Note: A small dia. pin (1/4") or bolt may be inserted into aligned holes to hold adjustment.

5. Pull throttle cable slightly to remove any slack and tighten cable clamp screw to lock adjustment in place.

6. Remove alignment pin, if used, and check control operation. Refer to Adjusting Throttle-Choke Control, page 12.

CONNECT WIRE HARNESS

1. Secure clutch and engine in-line connectors (Fig. 6).

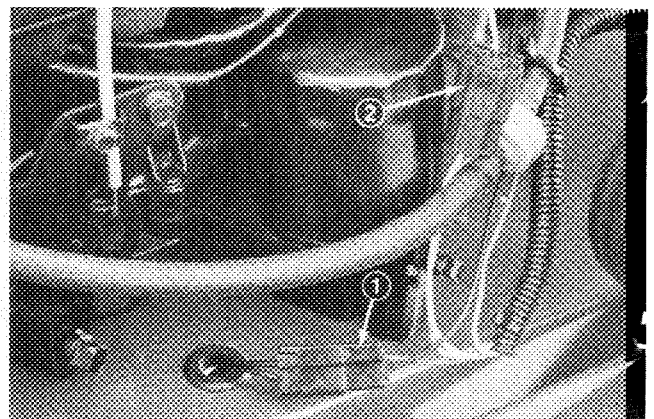


Figure 6

1. Clutch connectors
2. Engine connectors

SET-UP INSTRUCTIONS

2. Mount remaining wires to one of three holes in frame, at rear of engine, with self tapping screw and starwasher.

3. Secure wire harness to fuel line (above fuel filter) with a cable tie as shown in Fig. 6.

4. Secure wire harness and throttle cable to upper handle with a cable tie.

INSTALL CONTROL RODS

1. Thread a rod fitting onto each control rod approximately 2" (Fig. 7).

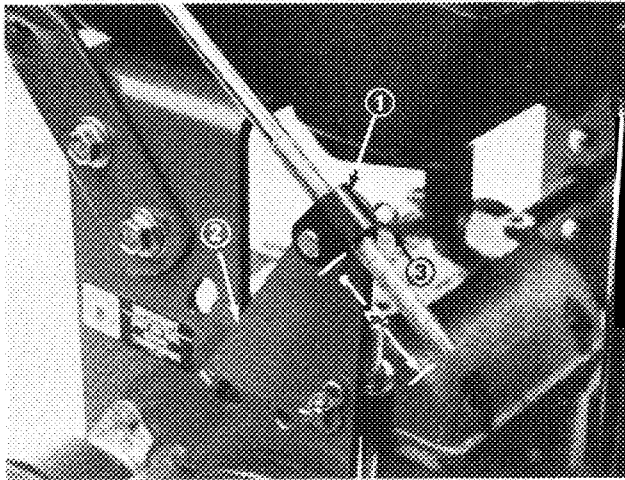


Figure 7

- | | |
|------------------------|--|
| 1. Control rod fitting | 3. Clevis pin, washer & hairpin cotter |
| 2. Idler brackets | |

2. Mount rod fitting ends to mounting holes in idler brackets (from outside) with clevis pins, washers and hairpin cottes (Fig. 7).

Note: The control bar and upper handle must be parallel when in relaxed drive and brake positions.

3. Check gap between control bar and upper handle when fully engaging wheel belts. Gap should be approximately 1 to 1-1/4" (Fig. 8).

4. Check operation. If adjustment is required, remove hairpin cotter and washer securing end of control rod to upper control bar, thread rod into or out of rod fitting to proper position and reinstall to control bar with washer and hairpin cotter.

5. Brake rods should be adjusted so parking brake lever can be swung into a snug position against the upper handle while pulling back on upper control bar (Fig. 8).

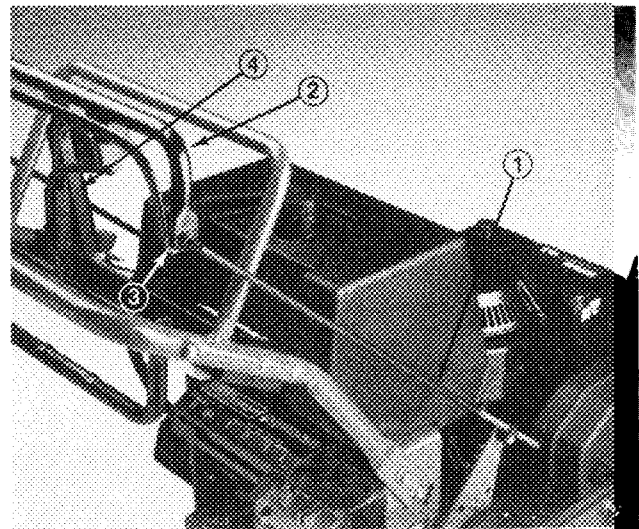


Figure 8

- | |
|----------------------------|
| 1. Control rod |
| 2. Upper control bar |
| 3. Washer & hairpin cotter |
| 4. Parking brake lever |

6. If an adjustment to brake rods is required, remove hairpin cotter and washer securing brake rod fitting to idler bracket (Fig. 9).

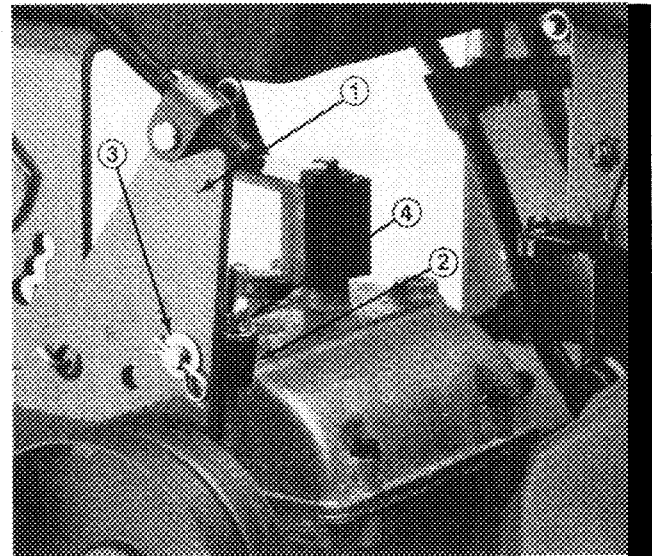


Figure 9

- | | |
|----------------------|----------------------------|
| 1. Idler bracket | 3. Hairpin cotter & washer |
| 2. Brake rod fitting | 4. Wing nut |

7. Adjust wing nut up or down on brake rod and re-secure to idler bracket. Check adjustment and readjust if necessary.

Note: Make sure brake rod is installed in forward ("F") mounting hole in idler bracket.

8. Repeat procedure on opposite side if adjustment is required.

BEFORE OPERATING

FILL CRANKCASE WITH OIL

The engine does not have oil in the crankcase when it is shipped from the factory. If engine is started before oil is added to the crankcase, engine damage could result. Therefore, before engine is started for the first time:

1. Position mower on level surface.
2. Clean area around the oil dipstick to prevent foreign matter from entering the filler hole when dipstick is removed.
3. Remove dipstick (Fig. 10).

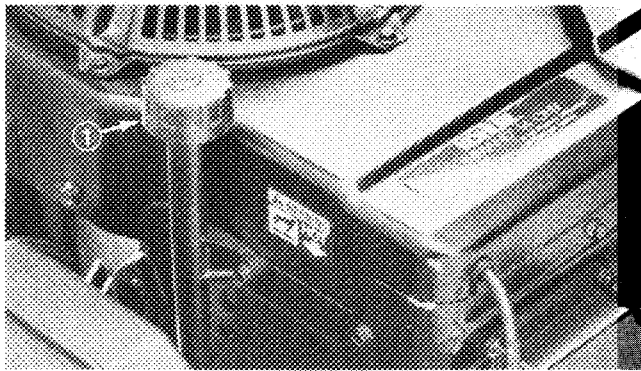


Figure 10
1. Dipstick

4. Slowly pour approximately 4 pints of oil into the filler neck. The engine uses any high quality detergent oil having the American Petroleum Institute —API— “service classification” SF. The recommended oil to use is: SAE 5W20 or 5W30 (below 32° F) SAE 30 (above 32° F). SAE 10W30 or 10W40 may also be used when temperature is above 0°F.

5. Wipe end of dipstick with clean rag and insert it into filler neck. Then remove the dipstick and check level of oil by reading the dipstick (Fig. 10). If level of oil is low, add only enough oil to raise level to FULL mark on dipstick. DO NOT ADD OIL SO LEVEL RISES ABOVE FULL MARK BECAUSE ENGINE COULD BE DAMAGED WHEN IT IS STARTED.

6. Insert dipstick into filler neck and tighten.

Note: Check level of oil after every 5 operating hours or each time the mower is used. Initially, change oil after the first 5 hours of operation; thereafter, when conditions are normal, change oil after every 25 hours of operation. However, change oil more frequently when mower is operated in dusty or dirty conditions.

CHECK TIRE PRESSURE

Tires are over inflated at the factory. Check tires and insure they are inflated to 15 psi.

FILL FUEL TANK WITH GASOLINE

THE TORO COMPANY STRONGLY RECOMMENDS THE USE OF FRESH CLEAN, UNLEADED REGULAR GRADE GASOLINE IN TORO GASOLINE POWERED PRODUCTS. UNLEADED GASOLINE BURNS CLEANER, EXTENDS ENGINE LIFE, AND PROMOTES GOOD STARTING BY REDUCING THE BUILD-UP OF COMBUSTION CHAMBER DEPOSITS.

NOTE: NEVER USE METHANOL, GASOLINE CONTAINING METHANOL, GASOLINE CONTAINING MORE THAN 10% ETHANOL, GASOLINE ADDITIVES, PREMIUM GASOLINE, OR WHITE GAS BECAUSE ENGINE FUEL SYSTEM DAMAGE COULD RESULT.

1. Clean area around fuel tank cap and remove cap from tank.
2. Fill fuel tank to about 1 inch from top of the tank, not filler neck. Install fuel tank cap securely.
3. Wipe up spilled gasoline.



DANGER

Because gasoline is flammable, caution must be used when storing or handling it. Do not fill fuel tank while engine is running, hot or when machine is in an enclosed area. Vapors may build up and be ignited by a spark or flame source many feet away. DO NOT SMOKE while filling the fuel tank to prevent the possibility of an explosion. Always fill fuel tank outside and wipe up any spilled gasoline before starting engine. Use a funnel or spout to prevent spilling gasoline before starting engine and fill tank to about 1 inch from top of tank, not filler neck. Store gasoline in a clean safety-approved container and keep the cap in place on the container. Keep gasoline in a cool, well-ventilated place; never in an enclosed area such as a hot storage shed. To assure volatility, do not buy more than a 30 day supply of gasoline. Gasoline is a fuel for internal combustion engines; therefore, do not use it for any other purpose. Since many children like the smell of gas, keep it out of their reach because the fumes are explosive and dangerous to inhale.

CONTROLS

Throttle Control (Fig. 11) – The throttle control has three positions: CHOKE, FAST and SLOW.

Deck Engagement Control Bail (Fig. 11) – Control bail used in conjunction with deck engagement switch to release blade brake and engage electromagnetic clutch to drive deck pulleys. Release bail to disengage deck pulleys.

Deck Engagement Switch (Fig. 11) – Rocker switch used in conjunction with control bail to release blade brake and engage electromagnetic clutch to drive deck pulleys.

Gear Shift Lever (Fig. 11) – Transmission has four forward speeds, neutral and reverse, and has an in-line shift pattern. Do not shift while unit is moving, as transmission damage may occur.

Upper Control Bar (Fig. 11) – Shift to desired gear and push forward on control bar to engage forward traction operation and pull back to brake. Pull right side of control bar to turn right and left side to turn left.

Lower Control Bar (Fig. 11) – Shift transmission to reverse and pull rearward on lower control bar to engage rearward traction operation.

Parking Brake Lever (Fig. 11) – Pull back on upper control bar and swing brake lever up against the upper handle.

Ignition Switch (Fig. 11) – Key switch is used in conjunction with recoil starter. Switch has two positions: RUN and OFF.

Recoil Starter – Pull recoil Starter handle to Start engine.

Fuel Shut-off Valve – (Under fuel tank) Close fuel shut-off valve when transporting or storing mower.

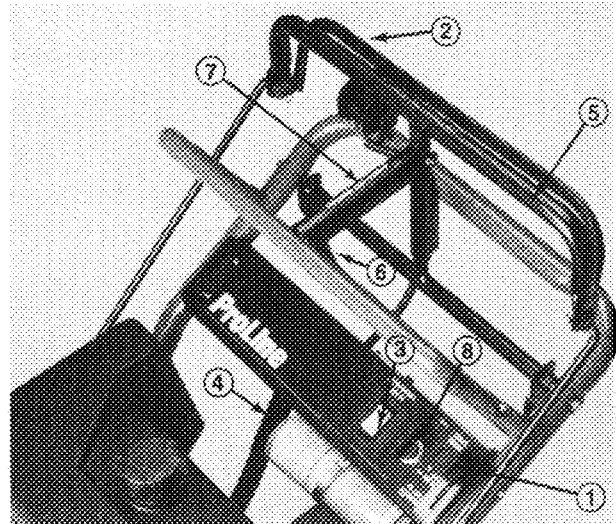


Figure 11

- | | |
|---------------------------------|------------------------|
| 1. Throttle control | 5. Upper control bar |
| 2. Deck engagement control bail | 6. Lower control bar |
| 3. Deck engagement switch | 7. Parking brake lever |
| 4. Gear shift lever | 8. Ignition switch |

OPERATING INSTRUCTIONS

STARTING AND STOPPING

1. Make sure Spark plug wire is installed on spark plug and fuel valve is open.
2. Shift into neutral and turn ignition key to RUN.
3. Move throttle control to CHOKE position before starting a cold engine.

Note: A warm or hot engine usually does not require any choking. To start a warm engine, move throttle control to FAST position.

4. Grasp recoil starter handle firmly and pull out until positive engagement results; then pull handle vigorously to start engine and allow rope to recoil slowly.

IMPORTANT: Do not pull recoil rope to its limit or let go of the starter handle when rope is pulled out because rope may break or recoil assembly may be damaged.

5. To engage blade, squeeze deck engagement control bail against upper control bar and press rocker switch forward. Hold control bail against control bar while operating. Releasing control bail disengages deck pulleys. Repeat procedure to engage deck pulleys if control bail is released.

6. To stop engine, release control bail and control bar, shift to Neutral, move throttle to SLOW and turn ignition key to OFF. Wait for all parts to stop moving before leaving the operating position behind handle.

7. Pull wire off spark plug to prevent possibility of accidental starting before storing machine.

8. Close fuel shut off valve before storing machine.

IMPORTANT: Make sure fuel shut off valve is closed before transporting or storing machine, as fuel leakage may occur.

MAINTENANCE



CAUTION

To prevent accidental starting of the engine while performing maintenance, shut engine off. Also, pull wire off spark plug (Fig. 12). Make sure wire does not contact plug accidentally.

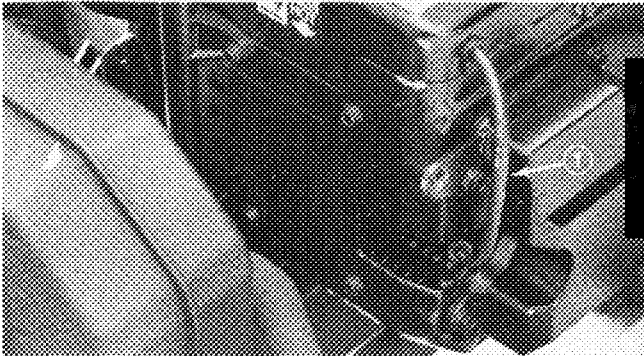


Figure 12
1. Spark plug wire

GREASE WHEELS

Lubricate the wheel bearings every 8 hours with No. 2 general purpose grease. Wipe up any excess grease.

GREASE TRANSMISSION COUPLERS

Lubricate the transmission couplers (Fig. 13) every 250 hours with No. 2 general purpose grease. Pump grease gun about 4 times. Wipe up any excess grease.

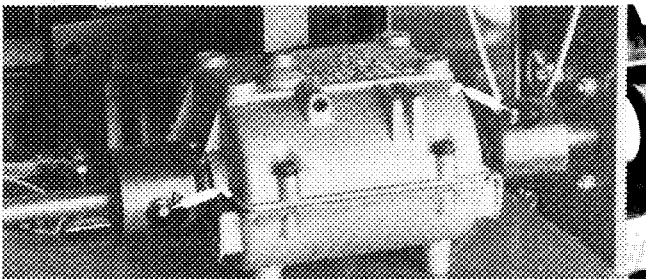


Figure 13

SERVICING AIR CLEANER

The foam air cleaner element must be cleaned after every 25 hours engine operation if engine is operated in clean air conditions. The paper element must be cleaned or replaced after every 50 hours engine operation if engine is operated in clean air conditions. However, elements must be cleaned every few hours if operating conditions are extremely dusty or sandy. Replace paper element yearly.

1. Remove retaining knob and lift off air cleaner cover (Fig. 14).

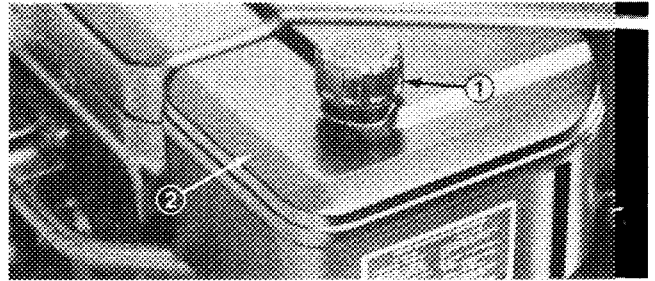


Figure 14
1. Retaining knob
2. Cover

2. Remove foam pre-cleaner by sliding it off the paper element (Fig. 15).

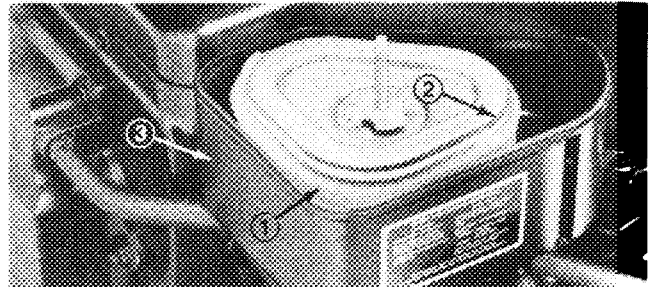


Figure 15
1. Foam element
2. Paper element
3. Air cleaner body

3. a. Wash foam pre-cleaner in detergent and warm water.
b. Wrap foam pre-cleaner in cloth and squeeze dry. Do not wring pre-cleaner.
c. Saturate foam pre-cleaner in engine oil. Squeeze to remove excess oil.
4. Remove paper element and clean air cleaner body carefully to prevent dirt from entering carburetor.
5. Clean paper element by gently tapping flat side of element.
 - a. If very dirty, replace cartridge.

IMPORTANT: Do not wash the paper element or use pressurized air, as damage will occur.

6. Reassemble air cleaner components.

IMPORTANT: Always operate engine with air cleaner elements in place or engine damage will result.

CHANGING CRANKCASE OIL AND FILTER

1. Check level of oil before starting engine and after every 5 hours of operation. Maintain oil level at FULL mark on dipstick.

MAINTENANCE

To check level of oil:

- Position mower on level surface.
 - Clean the area around oil dipstick so foreign matter cannot enter filler hole when dipstick is removed.
 - Remove dipstick and wipe oil off with a clean rag.
 - Insert dipstick. Let dipstick cap threads rest on top of tube. Do not screw dipstick in.
 - Remove dipstick and check oil level. If level is low, add only enough oil to raise level to FULL mark. Do not overfill or engine damage may result.
 - Insert dipstick back into filler neck.
2. Change oil after first 5 hours of operation; every 25 hours thereafter. Change oil more frequently when operating conditions are extremely dusty or dirty.

To change oil:

- Position mower on level surface. Start and run engine for a period to warm the oil.
 - Turn engine off and place drain pan under frame, below drain plug. Remove drain plug and allow all oil to flow into drain pan. Install drain plug after oil stops flowing.
 - Remove dipstick and add oil to crankcase. Refer to CHECK CRANKCASE OIL LEVEL, page 10. Capacity of crankcase is 4 pints when changing filter, 3 pints when changing oil only. DO NOT OVERFILL or engine damage may result.
3. Change the oil filter every other oil change. To change filter:
- Drain the oil from the engine crankcase, refer To Change Oil, page 11.

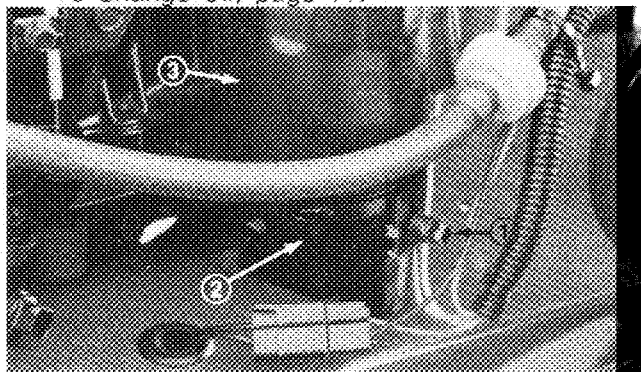


Figure 16

- Oil filter drain plug
- Filter adapter
- Oil filter

- Remove the oil filter drain plug located at the base of the oil filter adapter (Fig. 16). Drain oil into pan.
- Remove old filter and wipe off the filter adapter. Reinstall the filter drain plug.
- Apply a thin coating of new oil to the rubber gasket on the new oil filter.

- Install the new oil filter to the filter adapter. Tighten oil filter clockwise until the rubber gasket contacts the filter adapter, then tighten the filter an additional 1/4 turn. Fill the crankcase with new oil (4 pints). Refer to Check Crankcase Oil Level, page 10.

FUEL FILTER REPLACEMENT

An in-line filter is incorporated into the fuel line between the fuel tank and carburetor (Fig. 17). Use the following procedures should replacement become necessary:

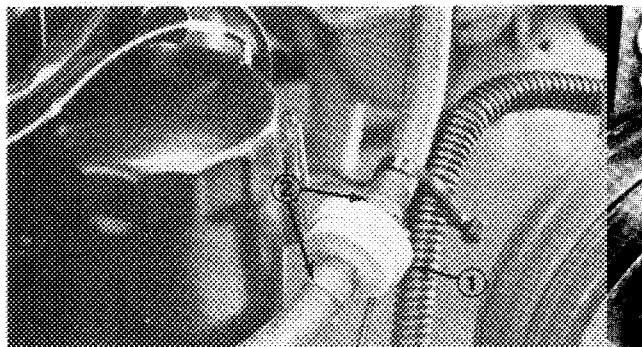


Figure 17

- Fuel filter
- Hose clamps

- Close fuel shut off valve, loosen the hose clamp on the carburetor side of filter and remove the fuel line from the filter.
- Place a drain pan under filter, loosen the remaining hose clamp and remove filter.



CAUTION

Since gasoline is highly flammable, drain it outdoors and make sure engine is cool to prevent a potential fire hazard. Wipe up any gasoline that may have spilled. Do not drain gasoline near any open flame or where gasoline fumes may be ignited by a spark. Do not smoke a cigar, cigarette, or a pipe when handling gasoline.

- Install the new filter with arrow on the filter body pointing towards the carburetor.

REPLACING SPARK PLUG

Since air gap between center and side electrodes of the spark plug increases gradually during normal operation of the engine, check condition of electrodes after every 50 operating hours. Recommended air gap is 0.035 of an inch (0.9 mm). Correct spark plug to use is a Champion RC 12YC.

MAINTENANCE

Note: The spark plug usually lasts a long time; however, the plug should be removed and checked whenever the engine malfunctions.

1. Clean area around spark plug so foreign matter cannot fall into cylinder when spark plug is removed.
2. Pull spark plug wire off spark plug and remove plug from cylinder head.
3. Check condition of side electrode, center electrode, and center electrode insulator to assure there is no damage.

IMPORTANT: A cracked, fouled, dirty or otherwise malfunctioning spark plug must be replaced. Do not sand blast, scrape, or clean electrodes by using a wire brush because grit may eventually release from the plug and fall into the cylinder. The result is usually a damaged engine.

4. Set air gap between center and side of electrodes at 0.035 of an inch (0.9 mm) (Fig. 18). Install correctly gapped spark plug w/gasket seal, and tighten plug to 18 ft-lb (24.4 Nm). If torque wrench is not used, tighten plug firmly.

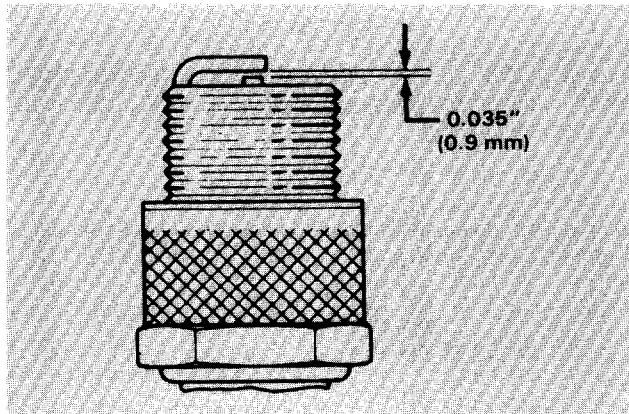


Figure 18

ADJUSTING THROTTLE-CHOKE CONTROL

Proper choke operation is dependent upon proper adjustment of the throttle control. Before adjusting the carburetor, assure the throttle control is operating properly.

1. Remove the retaining knob holding air cleaner in place and lift air cleaner assembly off carburetor.
2. Move throttle control to CHOKE position and check the position of the choke butterfly; it should be fully closed.
3. Move throttle control to FAST position. The butterfly should be in the fully open position.

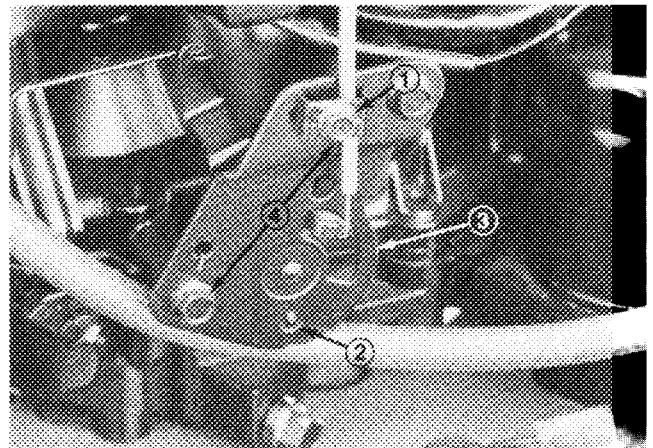


Figure 19

1. Clamp screw
2. Aligned holes
3. Control plate
4. Mounting screws (2)

4. If the choke butterfly is positioned as described in steps 2 and 3, replace the air cleaner assembly and continue operation.

If either the choke butterfly does not close or is not fully open in the FAST position, adjust the throttle control as follows:

1. Place throttle control in FAST position.
2. Loosen the throttle cable clamp screw (Fig. 19) and move the control cable casing and wire until the hole in speed control is aligned with hole in control plate. Tighten cable clamp.
3. Turn in choke adjusting screw (located behind control plate) until light contact is made with flange on control lever.
4. Reassemble air cleaner to carburetor.
5. Start engine and let it warm up for approximately two minutes. Next, make sure throttle control is in FAST position.



DANGER

Engine must be running so final adjustment of the throttle can be performed. To guard against possible personal injury, shift into neutral, and engage parking brake. Keep hands, feet, face, and other parts of the body away from the cutter blades, underside of mower housing, discharge area, and any rotating engine parts.

6. Loosen (2) control panel mounting screws (Fig. 19).

MAINTENANCE

7. Slide control panel up or down to obtain 3200 ± 100 RPM. Check with tachometer.
8. Tighten control plate mounting screws making sure adjustment is not disturbed.
9. Recheck choke adjusting screw adjustment per instructions in step #3.
10. After throttle is adjusted, stop engine.

ADJUSTING CARBURETOR

The carburetor has been set at the factory, but an occasional adjustment may be required. An adjustment may be required to compensate for differences in fuel or temperature.

IMPORTANT: Before the carburetor is adjusted, throttle control must be checked for proper operation: refer to Adjusting Throttle-Choke Control, page 12.

1. Idle Fuel Screw (Fig. 20) — Close screw by gently rotating it clockwise.

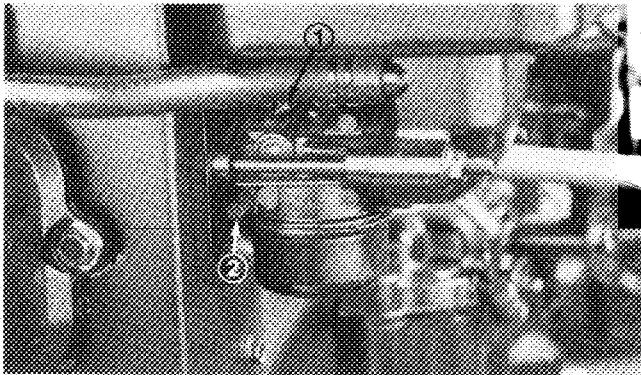


Figure 20
1. Idle speed screw
2. Idle fuel screw

IMPORTANT: Do not close the screw too tight because the valve and seat in carburetor will likely be damaged.

2. Rotate — open — the screw 1 turn counterclockwise (Fig. 20).

Note: The idle mixture screw Setting is an approximate; however, the setting will allow engine to be started so carburetor can be fine tuned.

3. Start engine and let it warm up at half throttle for approximately five to ten minutes. Next, move throttle control in SLOW detent.



DANGER

Engine must be running so final adjustment of the throttle can be performed. To guard against possible personal injury, shift into neutral, and engage parking brake. Keep hands, feet, face, and other parts of the body away from the cutter blades, underside of mower housing, discharge area, and any rotating engine parts.

4. Idle Speed Screw (Fig. 20) — Set the idle speed to $1200 \text{ rpm} \pm 75 \text{ RPM}$ by turning the idle speed screw in or out. Check speed with a tachometer.

5. Idle Fuel Screw (Fig. 20) — With throttle in slow position, turn screw out (counterclockwise) until the engine speed decreases (rich). Note position of the screw.

Now turn the screw in (clockwise). The engine speed may increase, then it will decrease as the screw is turned in (lean). Note position of the screw.

Set the screw midway between the rich and lean settings.

6. Recheck idle speed using a tachometer.

ADJUSTING AND REPLACING TRACTION BELT

1. Loosen capscrew and flange locknut securing idler pulley to frame (Fig. 21). Slide pulley outward relieving belt tension.

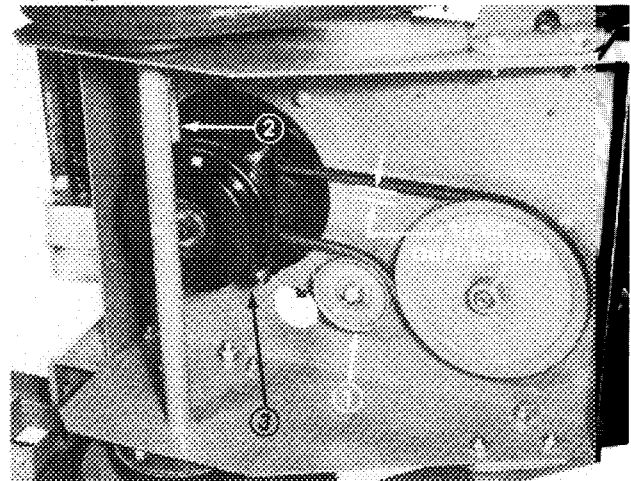


Figure 21
1. Idler pulley
2. Clutch retainer
3. Locknut on flange stud

2. Remove left front engine mounting bolt securing clutch retainer to frame (Fig. 21). Unhook retainer from clutch and remove retainer.

MAINTENANCE

3. Disconnect in-line wire connector and remove belt from drive pulley and clutch (Fig. 21).
4. Install new belt around clutch and drive pulley.
5. Secure in-line connectors and reinstall clutch retainer to clutch and frame with engine mounting bolt. Torque engine mounting bolt to 170–220 in-lb.
6. Position and secure idler pulley to frame so belt deflection is no more than 1 1/64" when 5–1/2 lb of force is applied to mid span of long leg of belt (Fig. 21).

ADJUSTING CLUTCH

The clutch is adjustable to ensure proper engagement and proper braking.

1. To adjust clutch, tighten or loosen locknuts on flange studs (Fig. 21).
2. Check adjustment by inserting feeler gauge thru slots next to flange studs.
3. The proper disengaged clearance between the clutch plates is .012 – .018 inches. It will be necessary to check this clearance at each of the three slots to ensure the plates are parallel to each other.

BRAKE ADJUSTMENT

An adjustment to the brake may be required to compensate for belt stretching or brake seating.

1. To adjust brakes, refer to Install Control Rod, page 7.

DRIVE BELT REPLACEMENT

1. Remove top capscrew securing idler support and idler bracket to rear frame (Fig. 22).

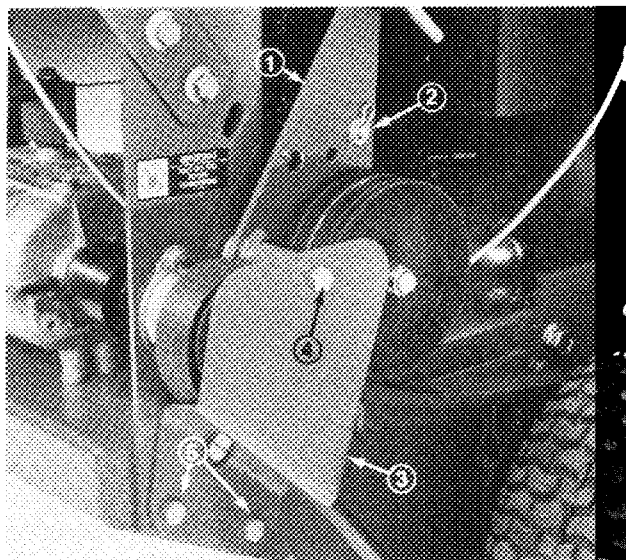


Figure 22

1. Idler bracket
2. Hairpin cotter, washer & brake rod fitting
3. Idler support
4. Top capscrew
5. Bottom capscrews


2. Loosen bottom two mounting screws enough to allow belt to pass between drive pulley and idler support (Fig. 22).

3. Raise wheel off ground enough to allow belt removal.

CLEANING COOLING SYSTEM

Clean engine cooling system frequently, by removing any build-up of grass, dirt or other debris from the cylinder and cylinder head cooling fins, air intake screen on flywheel end, and carburetor-governor levers and linkage. This will help insure adequate cooling and correct engine speed and will reduce the possibility of overheating and mechanical damage.

WIRING SCHEMATIC

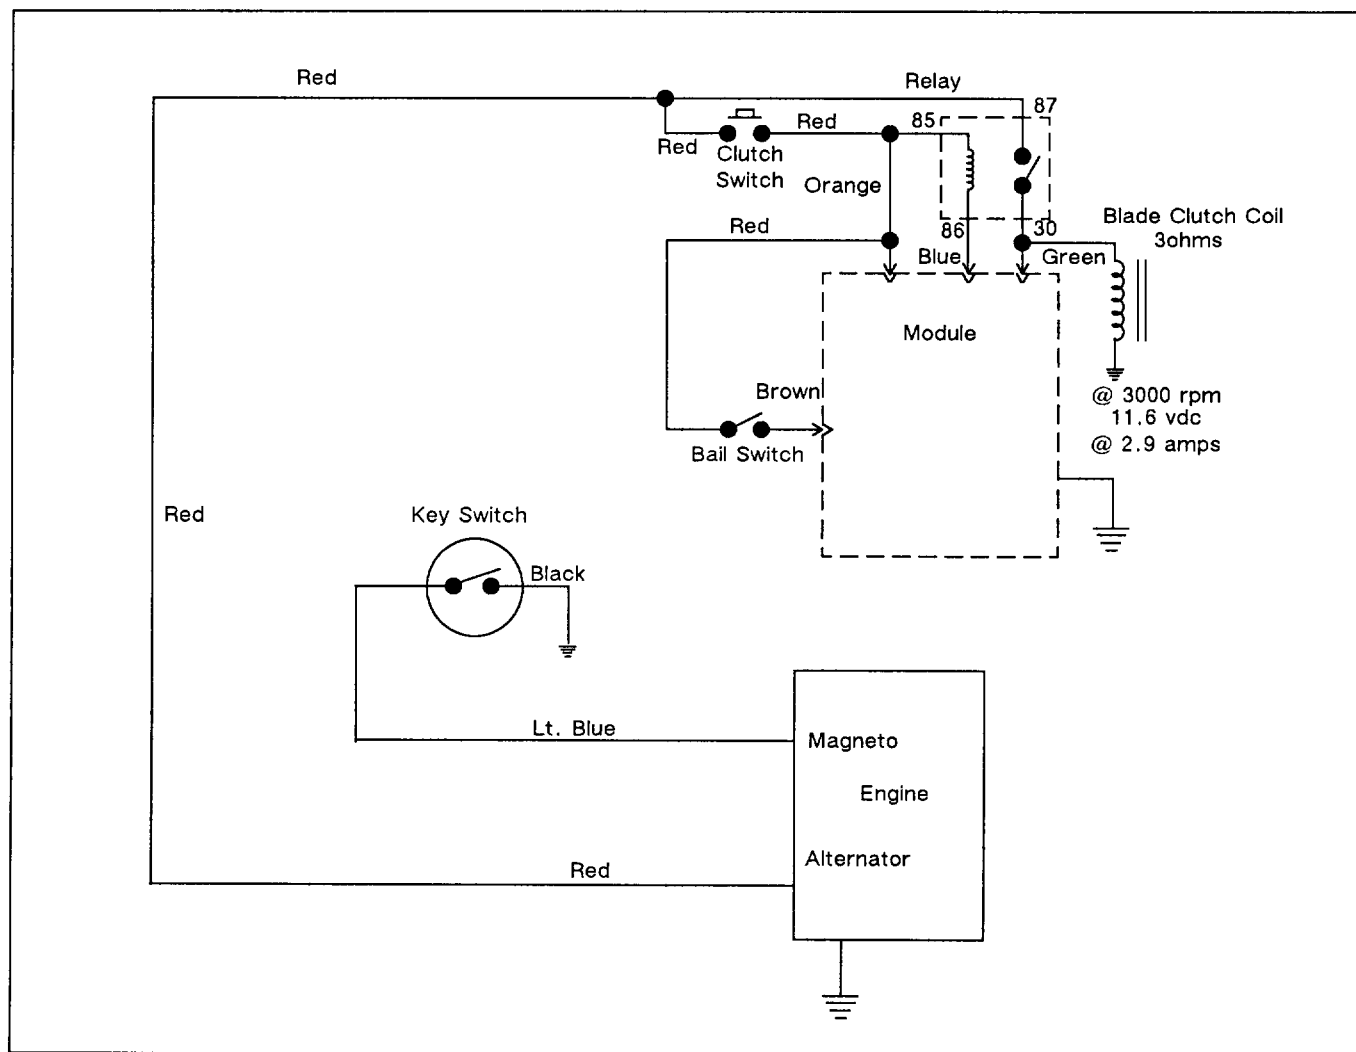

IDENTIFICATION AND ORDERING

The mower has two identification numbers: a model number and a serial number. The two numbers are stamped into a plate that is riveted to the frame on right front corner of mower. In any correspondence concerning the mower, supply the model and serial numbers to assure that correct information and replacement parts are obtained.

To order replacement parts from an authorized TORO Distributor, supply the following information:

1. Model and serial numbers of the machine.
2. Part number, description and quantity of parts desired.

Note: Do not order by reference number if a parts catalog is being used; use the part number.

The Toro Promise

A ONE YEAR LIMITED WARRANTY

The Toro Company promises to repair your TORO Product if defective in materials or workmanship. The following time periods from the date of purchase apply:

Commercial Products 1 Year

The cost of parts and labor are included, but the customer pays the transportation costs on walk rotary mowers with cutting unit widths of less than 25".

If you feel your TORO product is defective and wish to rely on The Toro Promise, the following procedure is recommended:

1. Contact your Authorized TORO ProLine Service Dealer (the Yellow Pages of your telephone directory is a good reference source).
2. The TORO ProLine Service Dealer will advise you on the arrangements that can be made to inspect and repair your product.
3. The TORO ProLine Service Dealer will inspect the product and advise you whether the product is defective and, if so, make all repairs necessary to correct the defect without an extra charge to you.

If for any reason you are dissatisfied with the distributor's analysis of the defect or the service performed, you may contact us.

Write:

TORO Consumer Products Service Department
8111 Lyndale Avenue South
Minneapolis, Minnesota 55420

The above remedy of product defects through repair by an Authorized TORO ProLine Service Dealer is the purchaser's sole remedy for any defect.

THERE IS NO OTHER EXPRESS WARRANTY. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE ARE LIMITED TO THE DURATION OF THE EXPRESS WARRANTY.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

This Warranty applies only to parts or components which are defective and does not cover repairs necessary due to normal wear, misuse, accidents, or lack of proper maintenance. Regular, routine maintenance of the unit to keep it in proper condition is the responsibility of the owner.

All warranty repairs reimbursable under the Toro Promise must be performed by an Authorized TORO ProLine Service Dealer using Toro approved replacement parts.

Repairs or attempted repairs by anyone other than an Authorized TORO ProLine Service Dealer are not reimbursable under the Toro Promise. In addition, these unauthorized repair attempts may result in additional malfunctions, the correction of which is not covered by warranty.

THE TORO COMPANY IS NOT LIABLE FOR INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE USE OF THE PRODUCT INCLUDING ANY COST OR EXPENSE OF PROVIDING SUBSTITUTE EQUIPMENT OR SERVICE DURING PERIODS OF MALFUNCTION OR NON-USE.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

COUNTRIES OTHER THAN THE UNITED STATES OR CANADA

Customers who have purchased TORO products exported from the United States or Canada should contact their TORO Distributor (Dealer) to obtain guarantee policies for your country, province or state. If for any reason

you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the TORO importer. If all other remedies fail, you may contact us at The Toro Company.