



**Count on it.**

# Operator's Manual

## 27 or 32-inch Cutting Unit Reelmaster® 7000-D Traction Unit

Model No. 03710—Serial No. 315000001 and Up

Model No. 03711—Serial No. 315000001 and Up

Model No. 03712—Serial No. 315000001 and Up



## ⚠ WARNING

### CALIFORNIA Proposition 65 Warning

**This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.**


This product complies with all relevant European directives. For details, please see the Declaration of Incorporation (DOI) at the back of this publication.

## Introduction

Read this information carefully to learn how to operate and maintain your product properly and to avoid injury and product damage. You are responsible for operating the product properly and safely.

You may contact Toro directly at [www.Toro.com](http://www.Toro.com) for product safety and operation training materials, accessory information, help finding a dealer, or to register your product.

Whenever you need service, genuine Toro parts, or additional information, contact an Authorized Service Dealer or Toro Customer Service and have the model and serial numbers of your product ready. **Figure 1** identifies the location of the model and serial numbers on the product. Write the numbers in the space provided.

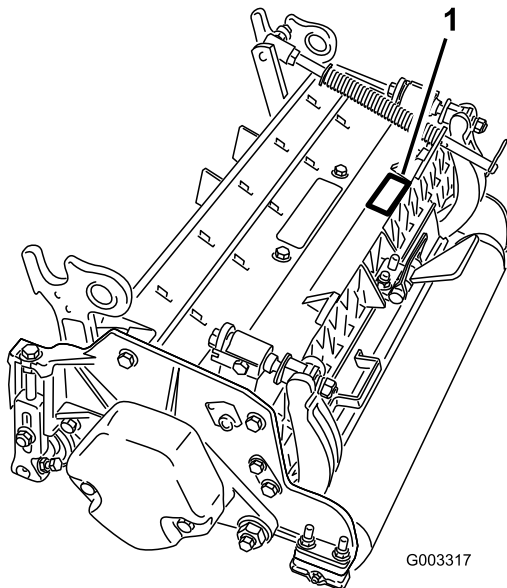

**Figure 1**

1. Location of the model and serial numbers

Model No. \_\_\_\_\_

Serial No. \_\_\_\_\_

This manual identifies potential hazards and has safety messages identified by the safety alert symbol (**Figure 2**), which signals a hazard that may cause serious injury or death if you do not follow the recommended precautions.



**Figure 2**

1. Safety alert symbol

This manual uses 2 other words to highlight information.

**Important** calls attention to special mechanical information and **Note** emphasizes general information worthy of special attention.

## Contents

Safety .....	3
Safety and Instructional Decals .....	3
Setup .....	4
1 Inspect the Cutting Unit.....	4
2 Using the Kickstand When Tipping the Cutting Unit .....	4
3 Adjusting the Rear Shield .....	5
4 Mounting the Counter Weights .....	5
5 Adjusting the Cutting Unit Steering .....	6
Product Overview .....	8
Specifications .....	8
Cutting Unit Accessories and Kits.....	8
Operation .....	9
Adjustments .....	9
Height-of-Cut Chart Terms .....	11
Groomer.....	13
Height of Cut Chart.....	13
Servicing The Bedknife .....	17
Maintenance .....	18
Lubrication.....	18
Adjusting the Reel Bearings.....	18
Servicing the Bedbar .....	19
Servicing the HD Dual Point Adjusters (DPA) .....	20
Servicing the Roller.....	21

# Safety

This machine has been designed in accordance with EN ISO 5395:2013.

**Hazard control and accident prevention are dependent upon the awareness, concern, and proper training of the personnel involved in the operation, transport, maintenance, and storage of the machine. Improper use or maintenance of the machine can result in injury or death. To reduce the potential for injury or death, comply with the following safety instructions.**

- Read, understand, and follow all instructions in the traction unit and cutting unit operators manuals before operating the cutting unit.
- Never allow children to operate the traction unit or cutting units. Do not allow adults to operate traction unit or cutting units without proper instruction. Only trained operators who have read this manual should operate the traction unit or cutting units.
- Never operate the cutting units when under the influence of drugs or alcohol.
- Keep all shields and safety devices in place. If a shield, safety device or decal is illegible or damaged, repair or replace it before operation is commenced. Also tighten any loose nuts, bolts, and screws to ensure cutting unit is in safe operating condition.
- Always wear substantial, slip-resistant footwear. Do not operate cutting units while wearing sandals, tennis shoes,

sneakers or shorts. Always wear long pants. Also, do not wear loose fitting clothing which could get caught in moving parts. Wearing safety glasses, safety shoes and a helmet is advisable and required by some local ordinances and insurance regulations.

- Remove all debris or other objects that might be picked up and thrown by the cutting unit reel blades. Keep all bystanders away from the working area.
- If the cutting blades strike a solid object or the unit vibrates abnormally, stop and shut the engine off. Check cutting unit for damaged parts. Repair any damage before starting and operating the cutting unit.
- Lower the cutting units to the ground and remove key from ignition switch whenever machine is left unattended.
- Be sure cutting units are in safe operating condition by keeping nuts, bolts and screws tight.
- Remove the key from the ignition switch to prevent accidental starting of the engine when servicing, adjusting or storing the machine.
- Perform only those maintenance instructions described in this manual. If major repairs are ever needed or assistance is desired, contact an Authorized Toro Distributor.
- To best protect your investment and maintain optimal performance of your Toro equipment, count on Toro genuine parts. When it comes to reliability, Toro delivers replacement parts designed to the exact engineering specification of our equipment. For peace of mind, insist on Toro genuine parts.

## Safety and Instructional Decals



Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or lost.



93-6688

1. Warning—read the instructions before servicing or performing maintenance.
2. Cutting hazard of hand or foot—stop the engine and wait for moving parts to stop.

# Setup

## Loose Parts

Use the chart below to verify that all parts have been shipped.

Procedure	Description	Qty.	Use
<b>1</b>	Cutting unit	1	Inspect the cutting unit.
<b>2</b>	No parts required	–	Use the kickstand when tipping the cutting unit.
<b>3</b>	No parts required	–	Adjust the rear shield.
<b>4</b>	No parts required	–	Mount the counter weights.
<b>5</b>	No parts required	–	Adjust the cutting unit steering.

## Media and Additional Parts

Description	Qty.	Use
Parts Catalog	1	Review the materials and keep them in an appropriate place.
Operator's Manual	1	
O-ring	1	Use these when mounting reel motor to cutting unit.
Screws	2	Use these to mount reel motor to cutting unit.

**Note:** Determine the left and right sides of the machine from the normal operating position.

# 1

## Inspect the Cutting Unit

### Parts needed for this procedure:

1	Cutting unit
---	--------------

### Procedure

After the cutting unit is removed from the box, inspect the following:

1. Check each end of the reel for grease. Grease should be visible in the reel bearings and internal splines of the reel shaft.
2. Ensure that all nuts and bolts are securely tightened.
3. Make sure the carrier frame suspension operates freely and does not bind when it is moved back and forth.


# 2

## Using the Kickstand When Tipping the Cutting Unit

### No Parts Required


### Procedure

Whenever the cutting unit has to be tipped to expose the bedknife/reel, prop up the rear of the cutting unit with the kickstand (supplied with the traction unit) to make sure the nuts on the back end of the bedbar adjusting screws are not resting on the work surface ([Figure 3](#)).

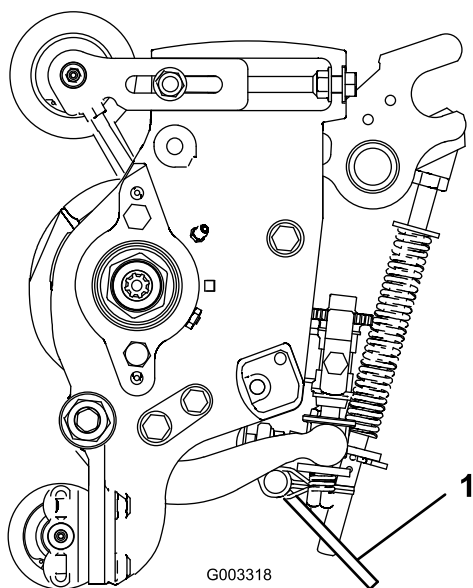

**Figure 3**

1. Cutting unit kickstand

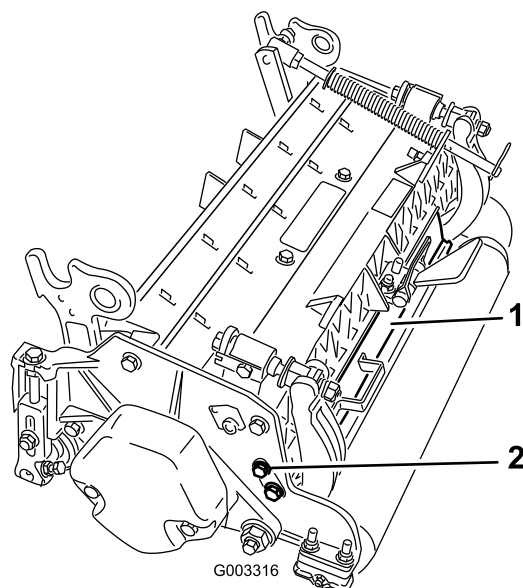

**Figure 4**

1. Rear shield
2. Bolt

## 3

### Adjusting the Rear Shield

#### No Parts Required

#### Procedure

Under most conditions, the best dispersion is attained when the rear shield is closed (front discharge). When conditions are heavy or wet, rear shield may be opened.

To open the rear shield (Figure 4), loosen the bolt securing the shield to the left side plate, rotate the shield to the open position, and tighten the bolt.


## 4

### Mounting the Counter Weights

#### No Parts Required

#### Procedure

All cutting units are shipped with the counter weight mounted to the left end of the cutting unit. Use the following diagram to determine the position of the counter weights and reel motors.

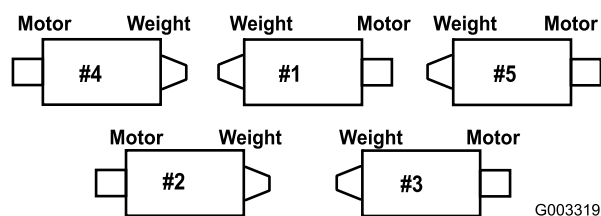

**Figure 5**

1. On the #2 and #4 cutting units, remove the 2 bolts securing the counter weight to the left end of the cutting unit.
2. Remove the counter weight (Figure 6).


# 5

## Adjusting the Cutting Unit Steering

### No Parts Required

### Increased Steering for the Rear Cutting Units


Increase the steering on the rear cutting units by removing the 2 pivot spacers, hex socket screws and flange lock nuts (Figure 8) from the rear (#2 and #3) cutting unit carrier frames (Figure 9).

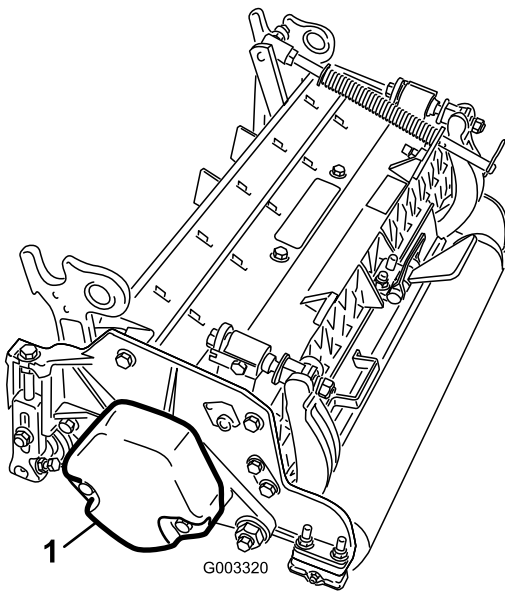

**Figure 6**

1. Counter weight


3. On right end of cutting unit, remove the plastic plug from the bearing housing (Figure 7).
4. Remove the 2 bolts from the right side plate (Figure 7).

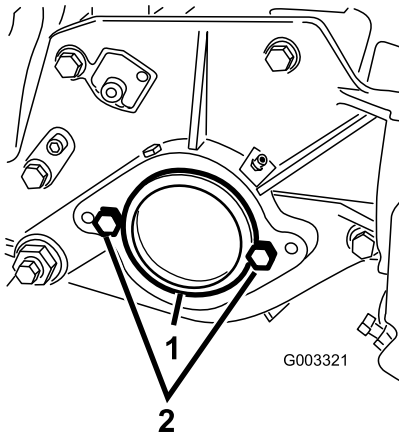

**Figure 7**


1. Plastic plug
2. Bolts (2)

5. Install the counter weight to the right end of the cutting unit with the 2 screws previously removed.
6. Loosely install the 2 reel motor mounting bolts to the left side plate of the cutting unit (Figure 9).

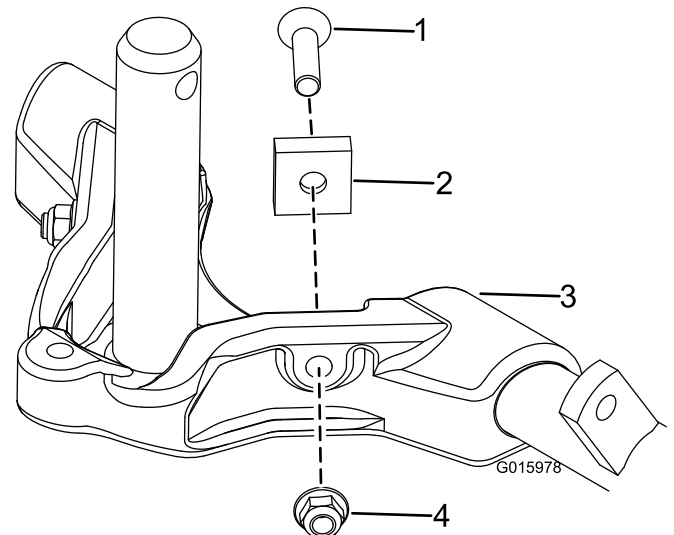

**Figure 8**


1. Hex socket screw
2. Pivot spacer
3. Carrier frame
4. Flange lock nut

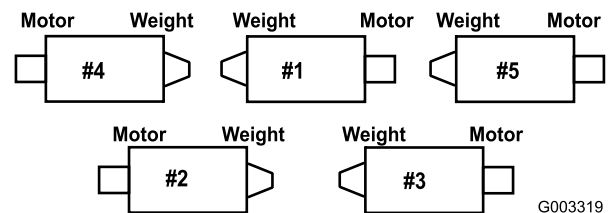

**Figure 9**

## Fixed Steering

To lock (fix) the steering on the cutting units, secure the pivot yoke to the carrier frame with the snapper pin ([Figure 10](#)).

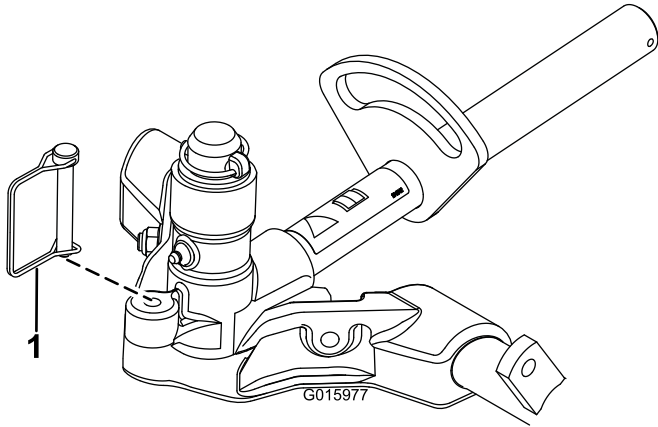

**Figure 10**

1. Snapper pin

---

**Note:** Fixed steering is recommended when cutting side hills.

# Product Overview

## Specifications

Weight	27 inch, 8 Blade – 77 kg (170 lb)
	27 inch, 11 Blade – 79 kg (175 lb)
	32 inch, 8 Blade – 87 kg. (191 lb)

## Cutting Unit Accessories and Kits

**Note:** see parts catalog for part numbers

**Note:** All accessories and kits are 1 per cutting unit unless otherwise specified.

**Rear Roller Brush Kit:** A high-speed, high-contact brush that keeps the rear roller free of grass and debris, which maintains a consistent height of cut and prevents clumping. This leads to a better after cut appearance.

**Groomer Kit (Model 03711 only):** Rotating blades assembled behind the front roller, which provide the best method for reducing grain and spongy turf by standing up the grass before cutting. The groomer also knocks off dew for decreased stickiness and clumping, opens up the canopy for better grass clipping integration, and lifts the grass for a clean, crisp cut. The overall design improves the quality of cut for healthier turf grass while improving the after-cut appearance

**Broomer Kit:** Multiple brush strips woven into the helical groomer blades improve the effectiveness of the groomer kit. The performance of the groomer is enhanced by enabling a full-width "Brooming" effect of turf while opening up the canopy for better grass clipping integration. The combination of groomer and broomer systems optimize the quality of cut and after-cut appearance for more consistent playing conditions.

**Comb/Scraper Kit:** A fixed comb installed behind the front roller, which helps reduce grain and spongy turf by standing up the grass before cutting. A scraper for the front Wiehle roller is included in the kit.

**Shoulder Roller:** Helps reduce over-lap marks for warm season grasses (Bermuda, Zoysia, Paspalum).

**Collar Kit (6 per needed per roller):** Helps reduce over lap marks for warm season grasses (Bermuda, Zoysia, Paspalum). This kit is installed on the existing Wiehle roller, but is not as aggressive as the Shoulder roller.

**Short Rear Roller:** Helps reduce double roller marks for cool season grasses (Bent, Blue grass, Rye). The short rollers should only be installed on two rear cutting units

**Full Front Roller:** Helps produce more pronounced striping (repeated cutting in the same direction/path), however, effective height of cut is raised and quality of cut is reduced.

**Scrapers (Wiehle, Shoulder, Rear roller, Full Front Roller):** Fixed scrapers for all optional rollers are available for reducing grass build up on rollers which can affect height of cut settings.

**Roller Rebuild Kit:** Includes all the bearings, bearing nuts, inner seals and outer seals required to rebuild a roller.

**Roller Rebuild Tool Kit:** Includes all the tools and the installation instructions required to rebuild a roller with the roller rebuild kit.



# Operation

**Note:** Determine the left and right sides of the machine from the normal operating position.

## Adjustments

### Adjusting the Bedknife to the Reel


Use this procedure to set the bedknife to the reel and to check the condition of the reel and bedknife and their interaction. After completing this procedure, always test the cutting unit performance under your field conditions. You may need to make further adjustments to obtain optimal cutting performance.

**Important:** Do not overtighten the bedknife to the reel or you will damage it.

- After backlapping the cutting unit or grinding the reel, you may need to mow with the cutting unit for a few minutes and then perform this procedure to adjust the bedknife to the reel as the reel and bedknife adjust to each other.
- You may need additional adjustments if the turf is extremely dense or your cutting height is very low.

You will need the following tools to complete this procedure:

- Shim 0.0508 mm (0.002 inch)—Toro part number 125-5611
  - Cutting performance paper—Toro part number 125-5610
1. Position the cutting unit on a flat, level work surface. Turn the bedbar adjusting screws counterclockwise to ensure that the bedbar does not contact the reel (Figure 11).

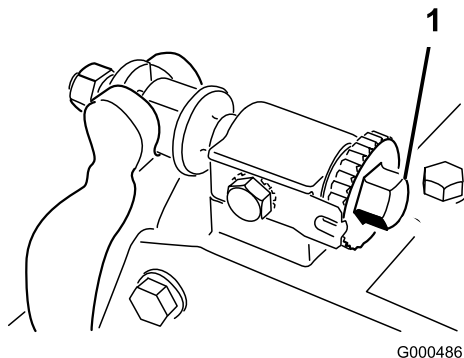


**Figure 11**

1. Bedbar adjusting screw

2. Tip the mower, to expose the bedknife and reel.

**Important:** Make sure nuts on back end of bedbar adjusting screws are not resting on the work surface (Figure 12).

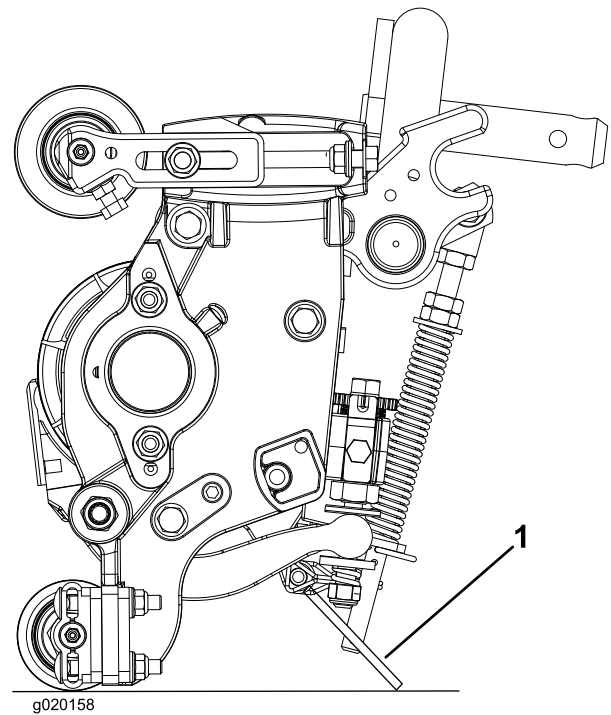

**Figure 12**

1. Cutting unit kickstand

3. Rotate the reel so that a blade crosses the bedknife approximately 25 mm (1 inch) in from the end of the bedknife on the right hand side of the cutting unit. Putting an identifying mark on this blade will make subsequent adjustments easier. Insert the 0.05 mm (0.002 inch) shim between the marked reel blade and the bedknife at the point where the blade crosses the bedknife.
  4. Turn the right bedbar adjuster clockwise until you feel **light** pressure (i.e. drag) on the shim, then back off the bedbar adjuster two clicks and remove the shim. (Since adjusting one side of the cutting unit affects the other side, the two clicks will provide clearance for when the other side is adjusted)
- Note:** If starting with a large gap, both sides should initially be drawn closer by alternately tightening the right and left hand sides.
5. **Slowly** rotate the reel so that the same blade that you checked on the right side is crossing the bedknife approximately 25 mm (1 inch) in from the end of the bedknife on the left hand side of the cutting unit.
  6. Turn the left bedbar adjuster clockwise until the shim can be slid through the reel to bedknife gap with light drag.
  7. Return to the right side and adjust as necessary to get light drag on the shim between the same blade and bedknife.
  8. Repeat steps 6 and 7 until the shim can be slid through both gaps with slight drag, but one click in on both


sides prevents the shim from passing through on both sides. The bedknife is now parallel to the reel.

**Note:** This procedure should not be needed on daily adjustments, but should be done after grinding or disassembly.

9. From this position (i.e. one click in and shim not passing through) turn the bedbar adjusters clockwise one click each.

**Note:** Each click turned moves the bedknife 0.022 mm (0.0009 inches). **Do not over tighten the adjusting screws.**

10. Test the cutting performance by inserting a long strip of cutting performance paper (Toro part number 125-5610) between reel and bedknife, perpendicular to the bedknife (Figure 13). **Slowly** rotate the reel forward; it should cut the paper.

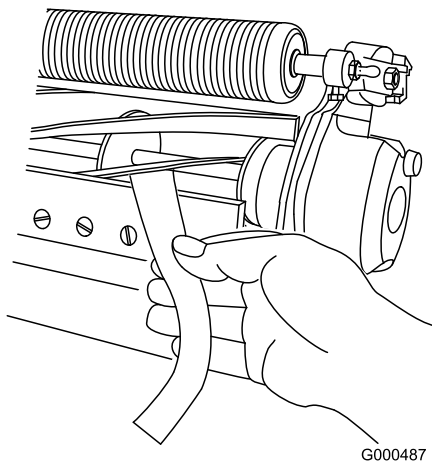


**Figure 13**

**Note:** Should excessive reel drag be evident, it will be either necessary to backlap or regrind the cutting unit to achieve the sharp edges needed for precision cutting.

## Adjusting the Rear Roller

1. Adjust the rear roller brackets (Figure 14) to the desired height of cut range by positioning the required amount of spacers below the side plate mounting flange (Figure 14) per the HOC Chart.

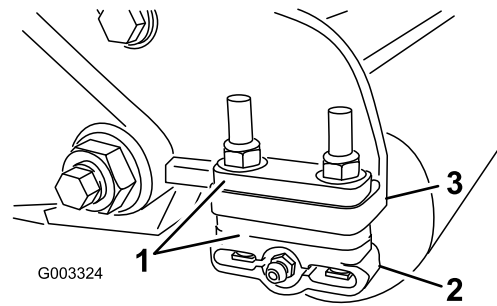


**Figure 14**

1. Spacer
2. Roller bracket
3. Side plate mounting flange

2. Raise rear of cutting unit and place a block under bedknife.
3. Remove (2) nuts securing each roller bracket and spacer to each side plate mounting flange.
4. Lower roller and screws from side plate mounting flanges and spacers.
5. Place spacers onto screws on roller brackets.
6. Re-secure roller bracket and spacers to underside of side plate mounting flanges with nuts previously removed.
7. Verify that bedknife to reel contact is correct. Tip mower to expose front and rear rollers and bedknife.

**Note:** The position of the rear roller to the reel is controlled by the machining tolerances of the assembled components and paralleling is not required. A limited amount of adjustment is possible by setting the cutting unit on a surface plate and loosening the side plate mounting bolts (Figure 15). Adjust and retighten bolts. Torque the bolts to 37-45 N-m (27-33 ft-lb).

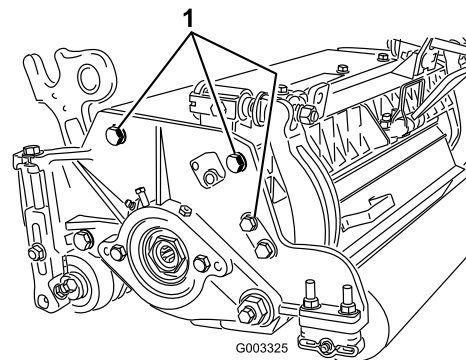

**Figure 15**

1. Side plate mounting bolts

# Height-of-Cut Chart Terms

## Height of Cut Setting (HOC)

The desired Height of Cut

## Bench Set Height of Cut

The height at which the top edge of the bedknife is set above a flat level surface that contacts the bottom of both the front and rear roller.

## Effective Height of Cut

This is the actual height the grass has been cut. For a given bench set height of cut, the actual height of cut will vary depending on the type of grass, time of year, turf and soil conditions. The cutting unit set up (aggressiveness of cut, rollers, bedknives, attachments installed, turf compensation settings, etc.) will also affect the effective height of cut. Check the effective height of cut using the Turf Evaluator, Model 04399 regularly to determine the desired bench set height of cut.

## Aggressiveness of Cut

Cutting unit Aggressiveness of Cut has a significant impact on the performance of the cutting unit. Aggressiveness of Cut refers to the angle of the bedknife relative to the ground (Figure 16).

The best cutting unit setup is dependent on your turf conditions and desired results. Experience with the cutting unit on your turf will determine the best setting to use. Aggressiveness of cut may be adjusted throughout the cutting season to allow for various turf conditions.

In general, less to normal aggressive settings are more appropriate for warm season grasses (Bermuda, Paspalum, Zoysia) while cool season grasses (Bent, Bluegrass, Rye) may require normal to more aggressive setups. More aggressive setups cut more grass off by allowing the spinning reel to pull more grass up into the bedknife.

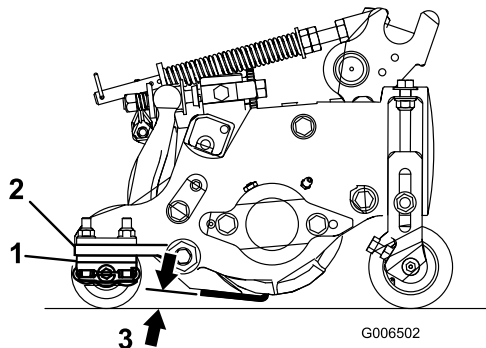


Figure 16

1. Rear spacers
2. Side plate mounting flange
3. Aggressiveness of cut

## Rear Spacers

The number of rear spacers determines the aggressiveness of cut for the cutting unit. For a given height of cut, adding spacers, below the side plate mounting flange, increases the aggressiveness of the cutting unit. All cutting units on a given machine must be set to the same aggressiveness of cut (Number of rear spacers, part no. 106-3925), otherwise the after-cut appearance could be negatively affected (Figure 16).

## Turf Compensation Settings

The turf compensation spring transfers the weight from the front to the rear roller. (This helps to reduce a wave pattern in the turf, also known as marcelling or bobbing.)

**Important:** Make spring adjustments with the cutting unit mounted to the traction unit, pointing straight ahead and lowered to the shop floor.

1. Make sure the hairpin cotter is installed in the rear hole in the spring rod (Figure 17).

**Note:** When servicing the cutting unit, move the hairpin cotter to the spring rod hole next to the turf compensation spring.

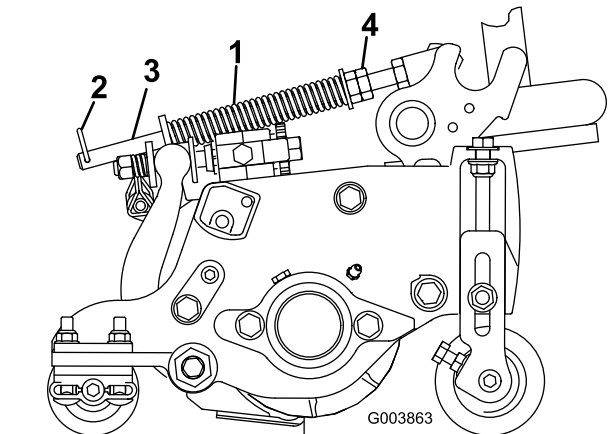


Figure 17

1. Turf compensation spring
2. Hair pin cotter
3. Spring rod
4. Hex nuts

2. Tighten the hex nuts on the front end of the spring rod until the compressed length of the spring is 15.9 cm (6.25 inches) (Figure 17).


**Note:** When operating on rough terrain decrease the spring length by 1.27 cm (1/2 inch). Ground following will be slightly decreased.

**Note:** The turf compensation setting will need to be reset if the HOC setting or the Aggressiveness of Cut setting is changed.

**Note:** If the cutting unit must be removed from the machine, move the hairpin cotter to the front hole in the spring rod (Figure 17). Make sure to move the hair pin cotter back to the rear hole in the spring rod after the cutting unit is reinstalled to the machine.

## Chain Links

The location at which the lift arm chain is attached determines the rear roller pitch angle ([Figure 18](#)).

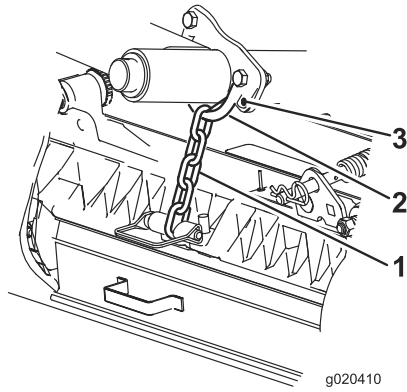

**Figure 18**

- 1. Lift chain
  - 2. U Bracket
  - 3. Bottom hole
-

# Groomer

The following chart shows the recommended height of cut settings when a groomer kit is installed on the cutting unit.

## Height of Cut Chart

HOC Setting	Aggressiveness of Cut	No. of Rear Spacers	No. of Chain Links	With Groomer kits installed
0.64 cm (0.250 inches)	Less	0	5+	Y
	Normal	0	5+	Y
	More	1	5+	-
0.95 cm (0.375 inches)	Less	0	5+	Y
	Normal	1	5+	Y
	More	2	5+	-
1.27 cm (0.500 inches)	Less	0	6	Y
	Normal	1	5+	Y
	More	2	5+	Y
1.59 cm (0.625 inches)	Less	1	6	Y
	Normal	2	5+	Y
	More	3	5+	-
1.91 cm (0.750 inches)	Less	2	6	Y
	Normal	3	5+	Y
	More	4	6	-
2.22 cm (0.875 inches)	Less	2	6	Y
	Normal	3	6	Y
	More	4	5+	-
2.54 cm (1.000 inches)	Less	3	6	Y
	Normal	4	5+	Y
	More	5	5+	-
2.86 cm (1.125 inches)	Less	4	6	-
	Normal	5	5	-
	More	6	5	-
3.18 cm (1.250 inches)	Less	4	6	-
	Normal	5	6	-
	More	6	6	-
3.49 cm (1.375 inches)	Less	4	6	-
	Normal	5	6	-
	More	6	6	-
3.81 cm (1.500 inches)	Less	5	6	-
	Normal	6	6	-
	More	7	6	-

4.13 cm (1.625 inches) *	Less	6	5	-
	Normal	7	5	-
	More	8	5	-
4.44 cm (1.750 inches) *	Less	6	5	-
	Normal	7	5	-
	More	8	6	-
4.76 cm (1.875 inches) *	Less	7	5	-
	Normal	8	6	-
	More	9	6	-
5.08 cm (2.000 inches) *	Less	7	6	-
	Normal	8	6	-
	More	9	6	-
5.40 cm (2.125 inches) *	Less	8	6	-
	Normal	9	6	-
	More	10	6	-
5.71 cm (2.250 inches) *	Less	8	6	-
	Normal	9	6	-
	More	10	6	-
6.03 cm (2.375 inches) *	Less	9	6	-
	Normal	10	6	-
	More	11	6	-
6.35 cm (2.500 inches) *	Less	9	6	-
	Normal	10	6	-
	More	11	6	-

+ Indicates that the U bracket, on the lift arm, is positioned in the bottom hole ([Figure 18](#)). \* 27-inch, 5-Blade Service Reel (Part 115-8270) or 32-inch, 5-Blade Service Reel (Part 115-8282)


"Y" indicates that this combination of HOC and spacers can be used with 27-inch groomers.

**Note:** Changing one chain link changes the rear roller pitch angle movement by 6.5 degrees.

**Note:** Changing the U bracket ([Figure 18](#)), on the lift arm, to the bottom hole, adds 3.5 degrees to the rear roller pitch angle.

## Adjusting the Height of Cut

1. Loosen locknuts securing height-of-cut arms to cutting unit side plates (Figure 19).

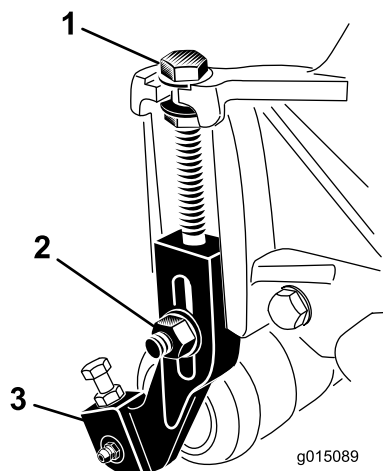


**Figure 19**

8-blade cutting unit shown

1. Adjusting screw
2. Locknut
3. Height-of-cut arm

2. Loosen the nut on the gauge bar (Figure 20) and set the adjusting screw to the desired height of cut. The distance between the bottom of the screw head and the face of the bar is the height of cut.

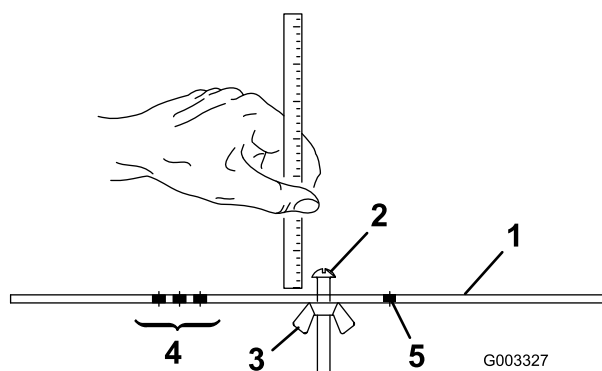


**Figure 20**

1. Gauge bar
2. Height adjusting screw
3. Nut
4. Holes used for setting Groomer HOG
5. Hole not used

3. Hook the screw head on cutting edge of bedknife and rest rear end of bar on rear roller (Figure 21).
4. Rotate the adjusting screw until the front roller contacts the gauge bar (Figure 21). Adjust both ends of roller until entire roller is parallel to the bedknife.

**Note:** For checking the HOC on cutting units installed with shoulder rollers, place the gauge bar on the larger diameter shoulders on the ends of the shoulder roller.

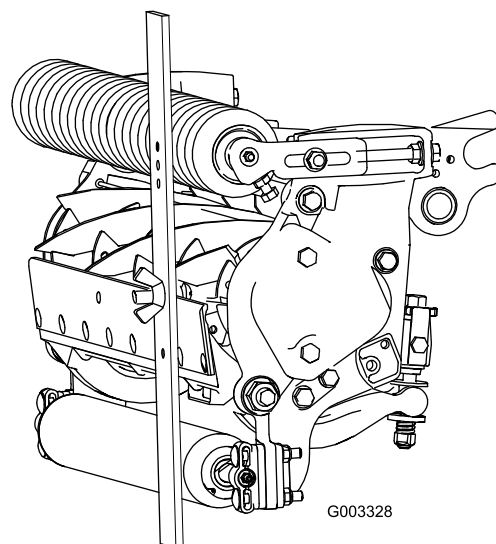

**Figure 21**

**Important:** When set properly, the rear and front rollers will contact the gauge bar and the screw will be snug against the bedknife. This ensures that the height-of-cut is identical at both ends of the bedknife.


5. Tighten nuts to secure adjustment. Do not overtighten nut. Tighten enough to remove play from washer.

Use the following chart to determine which bedknife is best suited for the desired height of cut.

Bedknife/Height of Cut Chart			
Bedknife	Part No.	Bedknife Lip Height *	Height of Cut
Low HOC (Optional)	120-1641 (27 inch) 120-1642 (32 inch)	5.6 mm (.220 inch)	6.4-12.7 mm (.250-.500 inch)
EdgeMax® (Optional)	112-8910 (27 inch) 112-8956 (32 inch)	6.9 mm (.270 inch)	9.5-63.5 mm (.375-2.50 inches)*
Standard (Production)	114-9388 (27 inch) 114-9389 (32 inch)	6.9 mm (.270 inch)	9.5-63.5 mm (.375-2.50 inches)*
Heavy Duty (Optional)	114-9390 (27 inch) 114-9391 (32 inch)	9.3 mm (.370 inch)	12.7-63.5 mm (.500-2.50 inches)

**Note:** \* Warm season grasses may require the Low HOC bedknife for .500 inches (12.7 mm) and below.



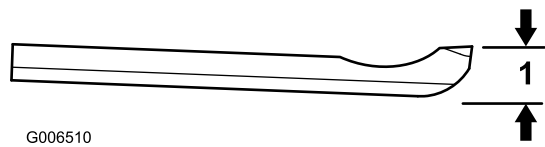

G006510

**Figure 22**

1. Bedknife Lip Height \*

## Cutting Unit Characteristics

The dual knob bedknife-to-reel adjustment system incorporated in this cutting unit simplifies the adjustment procedure needed to deliver optimum mowing performance. The precise adjustment possible with the dual knob/bedbar design gives the necessary control to provide a continual self-sharpening action—thus maintaining sharp cutting edges, ensuring good quality-of-cut, and greatly reducing the need for routine back lapping.

## Checking and Adjusting the Cutting Unit

Prior to mowing each day, or as required, each cutting unit must be checked to verify proper bedknife-to-reel contact. **This must be performed even though quality of cut is acceptable.**

1. Lower the cutting units onto a hard surface, shut off the engine, and remove the ignition key.
2. Slowly rotate the reel in a reverse direction, listening for reel-to-bedknife contact. If no contact is evident, turn the bedknife adjusting knobs clockwise, one click at a time, until light contact is felt and heard.

**Note:** The reel must cut one sheet of paper, when inserted at a right angle to the bedknife, at both ends and the center of the reel.

**Note:** The adjustment knobs have detents corresponding to 0.022 mm (0.0009 inch) bedknife movement for each indexed position.

3. If excessive contact/reel drag is evident it will be either necessary to backlap, reface the front of the bedknife, or regrind the cutting unit to achieve the sharp edges needed for precision cutting (Refer to the Toro Manual for Sharpening Reel and Rotary Mowers, Form No. 09168SL).


**Important:** Light contact is preferred at all times. If light contact is not maintained, the bedknife/reel edges will not sufficiently self-sharpen and dull cutting edges will result after a period of operation. If excessive contact is maintained, bedknife/reel wear will be accelerated, uneven wear can result, and quality of cut may be adversely affected.

**Note:** As the reel blades continue to run against the bedknife, a slight burr will appear on the front cutting

edge surface along the full length of the bedknife. If a file is occasionally run across the front edge to remove this burr, improved cutting can be obtained.

After extended running, a ridge will eventually develop at both ends of the bedknife. These notches must be rounded off or filed flush with the cutting edge of the bedknife to ensure smooth operation.

**Note:** Over time, the chamfer (Figure 23) will need to be reground as it is only designed to last 40% of the bedknife life.

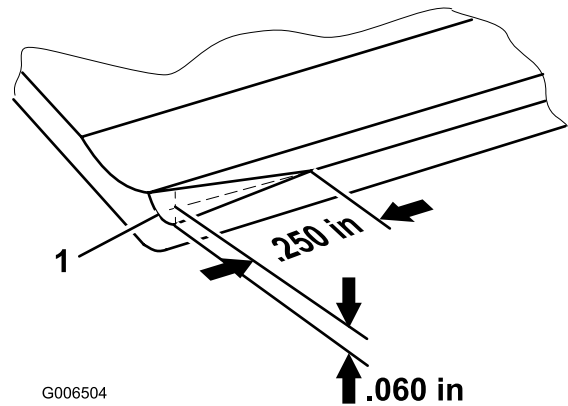

G006504

**Figure 23**

1. Lead-in chamfer on right end of bedknife

**Note:** Do not make lead-in chamfer too large as it may cause turf tufting.



# Servicing The Bedknife

The bedknife service limits are listed in the following charts.

**Important:** Operating the cutting unit with the bedknife below the service limit may result in poor after-cut appearance and reduce the structural integrity of the bedknife for impacts.

Bedknife Service Limit Chart				
Bedknife	Part No.	Bedknife Lip Height	Service Limit*	Grind Angles Top/Front Angle
Low HOC (Optional)	120–1641 (27 inch) 120–1642 (32 inch)	5.6 mm (.220 inch)	4.8 mm (.190 inch)	10/5 Degrees
EdgeMax® (Optional)	112-8910 (27 inch) 112–8956 (32 inch)	6.9 mm (.270 inch)	4.8 mm (.190 inch)	10/5 Degrees
Standard (Production)	114–9388 (27 inch) 114–9389 (32 inch)	6.9 mm (.270 inch)	4.8 mm (.190 inch)	10/5 Degrees
Heavy Duty (Optional)	114–9390 (27 inch) 114–9391 (32 inch)	9.3 mm (.370 inch)	4.8 mm (.190 inch)	10/5 Degrees

**Recommended Top and Front Bedknife Grind Angles**  
(Figure 24).

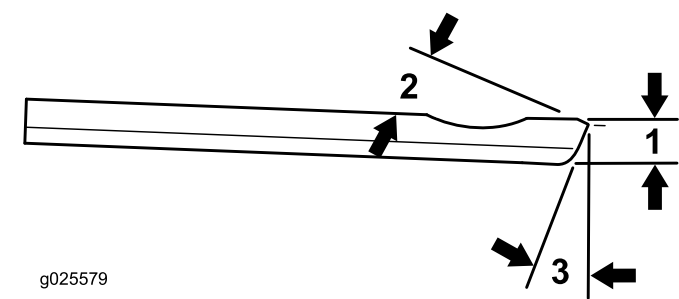


Figure 24

1. Bedknife Service Limit \*
2. Top grind angle
3. Front grind angle

**Note:** All bedknife service limit measurements reference the bottom of the bedknife (Figure 25)

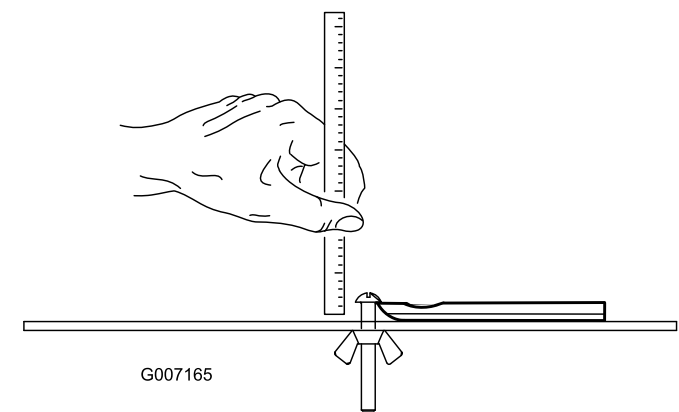


Figure 25

# Maintenance

## Lubrication

Each cutting unit has 6 grease fittings (Figure 26) that must be lubricated regularly with No. 2 general purpose, lithium-base grease.

The lubrication points are front roller (2), rear roller (2), and reel bearing (2).

**Note:** Lubricating cutting units immediately after washing helps purge water out of bearings and increases bearing life.

1. Wipe each grease fitting with a clean rag.
2. Apply grease until clean grease is seen coming out of roller seals and bearing relief valve.
3. Wipe excess grease away.

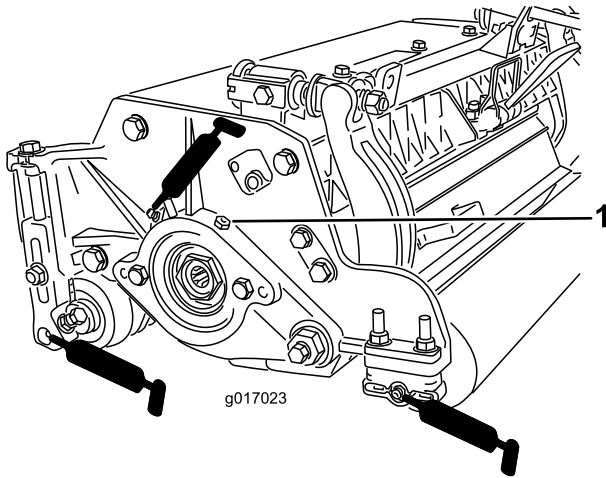


Figure 26

1. Relief valve

## Adjusting the Reel Bearings

To ensure long life of the reel bearings, periodically check if reel end play exists. The reel bearings can be checked and adjusted as follows:

1. Loosen reel to bedknife contact by turning the bedknife adjusting knobs (Figure 27) counterclockwise until no contact exists.

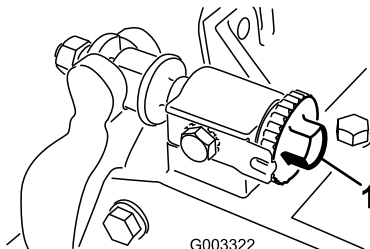


Figure 27

1. Bedknife adjusting knob

2. Using a rag or thickly padded glove, hold on to the reel blade and try to move the reel assembly side to side (Figure 28).

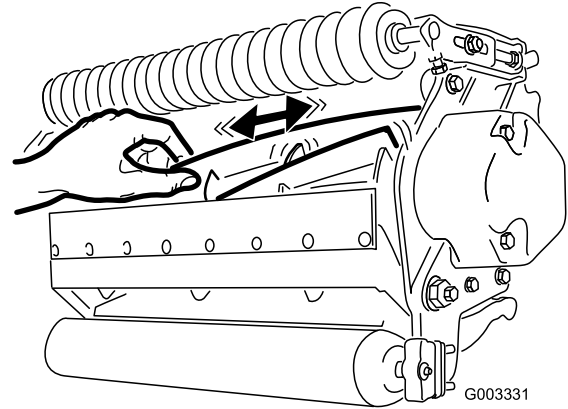


Figure 28

3. If end play exists, proceed as follows:
  - A. Loosen external set screw securing bearing adjusting nut to bearing housing located on the left side of the cutting unit (Figure 29).

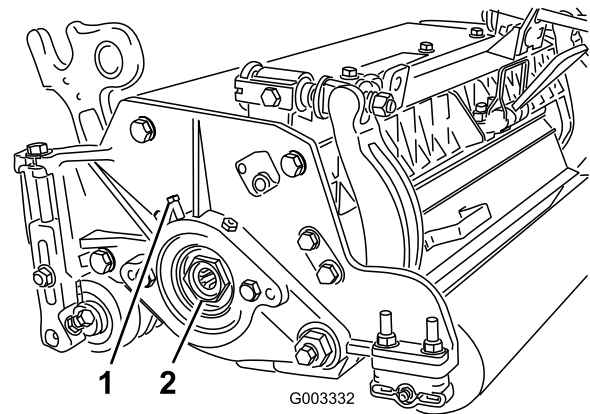


Figure 29

1. Set screw
2. Nut

- B. Using a 1-3/8 inch socket wrench, slowly tighten the reel bearing adjustment nut until no end play of the reel exists. If adjusting nut does not eliminate reel end play, replace reel bearings.


**Note:** Reel bearings do not require preload. Over tightening reel bearing adjuster nut will damage reel bearings.

4. Tighten the set screw to secure the bearing adjusting nut to the bearing housing. Torque it to 1.4–1.7 N-m (12–15 in-lb).

# Servicing the Bedbar

## Removing the Bedbar


1. Turn bedbar adjuster screws, counterclockwise, to back bedknife away from reel ([Figure 30](#)).

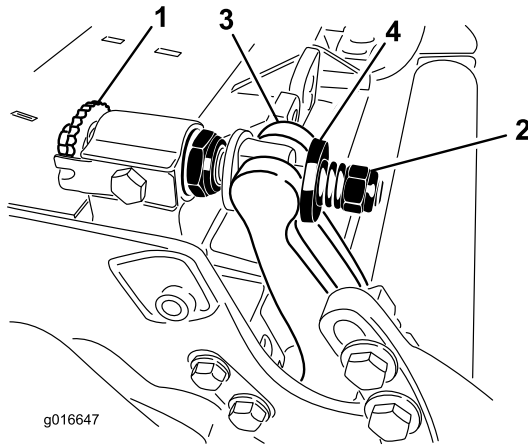

**Figure 30**

- |                           |           |
|---------------------------|-----------|
| 1. Bedbar adjusting screw | 3. Bedbar |
| 2. Spring tension nut     | 4. Washer |


2. Back out the spring tension nut, until the washer is no longer tensioned against the bedbar ([Figure 30](#)).
3. On each side of the machine, loosen the lock nut securing the bedbar bolt ([Figure 31](#)).

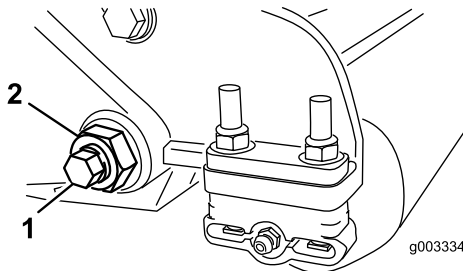

**Figure 31**

- |                |             |
|----------------|-------------|
| 1. Bedbar bolt | 2. Lock nut |
|----------------|-------------|

4. Remove each bedbar bolt allowing bedbar to be pulled downward and removed from machine bolt ([Figure 31](#)). Account for 2 nylon and 1 stamped steel washers on each end of bedbar ([Figure 32](#)).

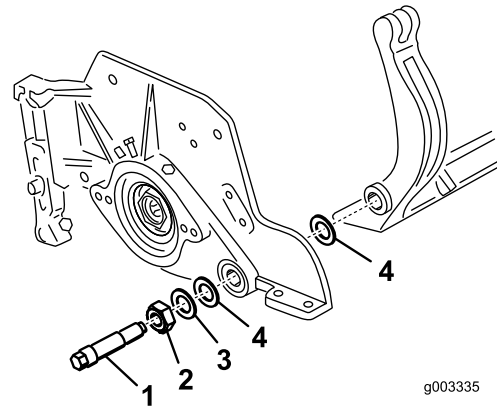

**Figure 32**


- |                |                 |
|----------------|-----------------|
| 1. Bedbar bolt | 3. Steel washer |
| 2. Nut         | 4. Nylon washer |

## Assembling the Bedbar

1. Install the bedbar, positioning the mounting ears between the washer and bedbar adjuster.
2. Secure bedbar to each side plate with bedbar bolts (nuts on bolts) and 6 washers.
3. Position a nylon washer on each side of side plate boss.
4. Place a steel washer outside each of the nylon washers ([Figure 32](#)).

**Note:** Torque the bedbar bolts to 37–45 N-m (27–33 ft-lb). Tighten the locknuts until the outside steel washer stops rotating and end play is removed, but do not overtighten or deflect side plates. Washers on inside may have a gap.

5. Tighten the spring tension nut until the spring is collapsed, then back off 1/2 turn ([Figure 33](#)).

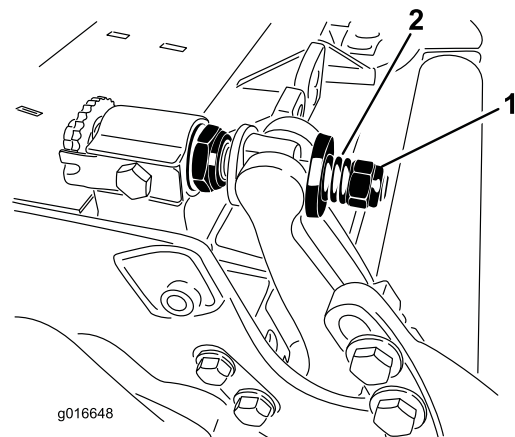

**Figure 33**


- |                       |           |
|-----------------------|-----------|
| 1. Spring tension nut | 2. Spring |
|-----------------------|-----------|

# Servicing the HD Dual Point Adjusters (DPA)

1. Remove all parts (refer to *Installation Instructions* for HD DPA Kit Model No. 120–7230 and to [Figure 34](#)).
2. Apply Never Seize to the inside of the bushing area on cutting unit center frame ([Figure 34](#)).
3. Align the keys on flange bushings to the slots in the frame and install the bushings ([Figure 34](#)).

4. Install a wave washer onto the adjuster shaft and slide the adjuster shaft into the flange bushings in the cutting unit frame ([Figure 34](#)).
5. Secure the adjuster shaft with a flat washer and lock nut ([Figure 34](#)). Torque the lock nut to 20 to 27 N-m (15 to 20 ft-lb).

**Note:** The bedbar adjuster shaft has left-hand threads.

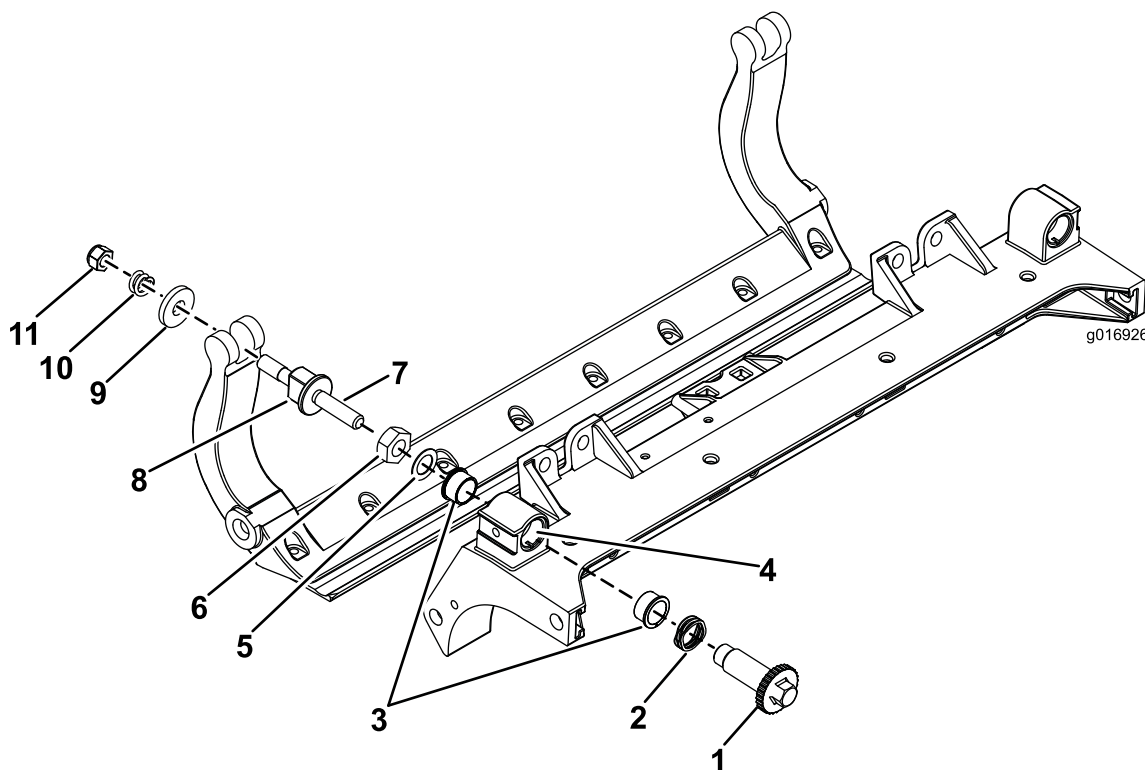

**Figure 34**

- |                   |                           |                           |                        |
|-------------------|---------------------------|---------------------------|------------------------|
| 1. Shaft adjuster | 4. Apply Never Seize here | 7. Apply Never Seize here | 10. Compression spring |
| 2. Wave washer    | 5. Flat washer            | 8. Bedbar adjuster screw  | 11. Spring tension nut |
| 3. Flange bushing | 6. Lock nut               | 9. Hardened washer        |                        |

6. Apply Never Seize lubricant to the threads of the bedbar adjuster screw that fit into the adjuster shaft.
7. Thread bedbar adjuster screw into the adjuster shaft.
8. Loosely install the hardened washer, spring and spring tension nut onto adjuster screw.
9. Install the bedbar, positioning the mounting ears between washer and bedbar adjuster.
10. Secure bedbar to each side plate with bedbar bolts (nuts on bolts) and 6 washers.
11. Position a nylon washer on each side of side plate boss.
12. Place a steel washer outside each of the nylon washers ([Figure 34](#)).
13. Tighten the nut on each bedbar adjuster assembly until the compression spring is fully compressed, then loosen the nut 1/2 turn ([Figure 34](#)).
14. Repeat the procedure on the other end of the cutting unit.
15. Adjust the bedknife to the reel.


**Note:** Torque the bedbar bolts to 37–45 N-m (27–33 ft-lb). Tighten the locknuts until the outside steel washer stops rotating and end play is removed, but

do not overtighten or deflect side plates. Washers on inside may have a gap.

# Servicing the Roller

A Roller Rebuild Kit, Part No. 114-5430 and a Roller Rebuild Tool Kit, Part No. 115-0803 ([Figure 35](#)) are available for servicing the roller. The Roller Rebuild Kit includes all the

bearings, bearing nuts, inner seals and outer seals to rebuild a roller. The Roller Rebuild Tool Kit includes all the tools and the installation instructions required to rebuild a roller with the roller rebuild kit. Refer to your parts catalog or contact your Authorized Toro Distributor for assistance.

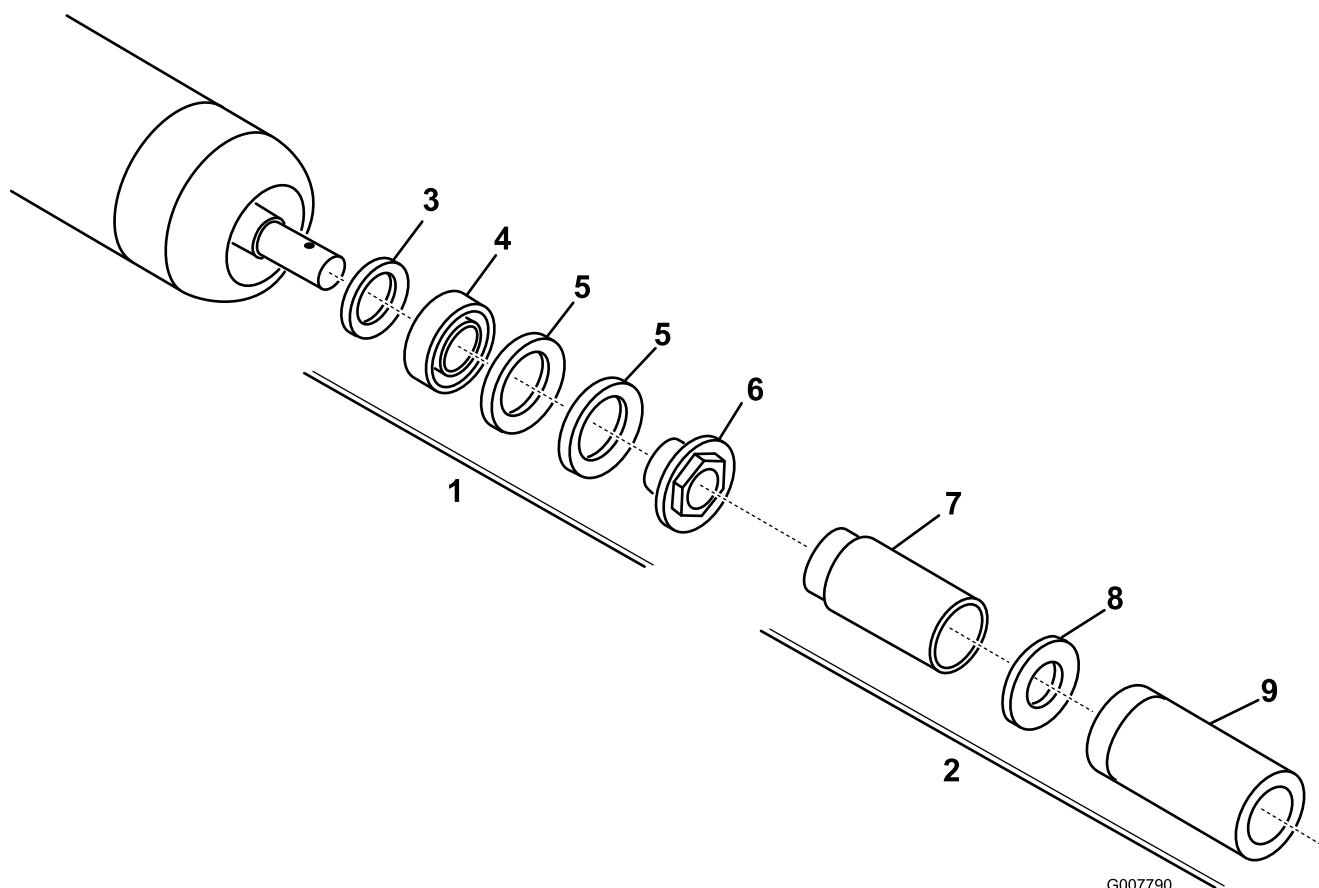

G007790

**Figure 35**

- |   |                            |
|---|----------------------------|
| 1. Rebuild kit (Part No. 114-5430)      | 6. Bearing nut             |
| 2. Rebuild tool kit (Part No. 115-0803) | 7. Inner seal tool         |
| 3. Inner seal                           | 8. Washer                  |
| 4. Bearing                              | 9. Bearing/outer seal tool |
| 5. Outer seal                           |                            |

# Declaration of Incorporation

The Toro Company, 8111 Lyndale Ave. South, Bloomington, MN, USA declares that the following unit(s) conform(s) to the directives listed, when installed in accordance with the accompanying instructions onto certain Toro models as indicated on the relevant Declarations of Conformity.

Model No.	Serial No.	Product Description	Invoice Description	General Description	Directive
03710	315000001 and Up	27-inch 8-Blade Cutting Unit, Reelmaster 7000-D Traction Unit	27-inch HD 8 BLD DPA CU	Cutting Unit	2000/14/EC 2006/42/EC
03711	315000001 and Up	27-inch 11-Blade Cutting Unit, Reelmaster 7000-D Traction Unit	27-inch HD 11 BLD DPA CU	Cutting Unit	2000/14/EC 2006/42/EC
03712	315000001 and Up	32-inch 8-Blade Cutting Unit, Reelmaster 7000-D Traction Unit	32-inch HD 8 BLD DPA CU	Cutting Unit	2000/14/EC 2006/42/EC

Relevant technical documentation has been compiled as required per Part B of Annex VII of 2006/42/EC.

We will undertake to transmit, in response to requests by national authorities, relevant information on this partly completed machinery. The method of transmission shall be electronic transmittal.

This machinery shall not be put into service until incorporated into approved Toro models as indicated on the associated Declaration of Conformity and in accordance with all instructions, whereby it can be declared in conformity with all relevant Directives.

Certified:



David Klis  
Sr. Engineering Manager  
8111 Lyndale Ave. South  
Bloomington, MN 55420, USA  
January 22, 2015

EU Technical Contact:

Peter Tetteroo  
Toro Europe NV  
B-2260 Oevel-Westerloo  
Belgium

Tel. 0032 14 562960  
Fax 0032 14 581911

## International Distributor List

Distributor:	Country:	Phone Number:	Distributor:	Country:	Phone Number:
Agrolanc Kft	Hungary	36 27 539 640	Maquiver S.A.	Colombia	57 1 236 4079
Balama Prima Engineering Equip.	Hong Kong	852 2155 2163	Maruyama Mfg. Co. Inc.	Japan	81 3 3252 2285
B-Ray Corporation	Korea	82 32 551 2076	Mountfield a.s.	Czech Republic	420 255 704 220
Casco Sales Company	Puerto Rico	787 788 8383	Mountfield a.s.	Slovakia	420 255 704 220
Ceres S.A.	Costa Rica	506 239 1138	Munditol S.A.	Argentina	54 11 4 821 9999
CSSC Turf Equipment (pvt) Ltd.	Sri Lanka	94 11 2746100	Norma Garden	Russia	7 495 411 61 20
Cyril Johnston & Co.	Northern Ireland	44 2890 813 121	Oslinger Turf Equipment SA	Ecuador	593 4 239 6970
Cyril Johnston & Co.	Republic of Ireland	44 2890 813 121	Oy Hako Ground and Garden Ab	Finland	358 987 00733
Equiver	Mexico	52 55 539 95444	Parkland Products Ltd.	New Zealand	64 3 34 93760
Femco S.A.	Guatemala	502 442 3277	Perfetto	Poland	48 61 8 208 416
ForGarder OU	Estonia	372 384 6060	Pratoverde SRL.	Italy	39 049 9128 128
G.Y.K. Company Ltd.	Japan	81 726 325 861	Prochaska & Cie	Austria	43 1 278 5100
Geomechaniki of Athens	Greece	30 10 935 0054	RT Cohen 2004 Ltd.	Israel	972 986 17979
Golf international Turizm	Turkey	90 216 336 5993	Riversa	Spain	34 9 52 83 7500
Guandong Golden Star	China	86 20 876 51338	Lely Turfcare	Denmark	45 66 109 200
Hako Ground and Garden	Sweden	46 35 10 0000	Solvart S.A.S.	France	33 1 30 81 77 00
Hako Ground and Garden	Norway	47 22 90 7760	Spypros Stavrinides Limited	Cyprus	357 22 434131
Hayter Limited (U.K.)	United Kingdom	44 1279 723 444	Surge Systems India Limited	India	91 1 292299901
Hydroturf Int. Co Dubai	United Arab Emirates	97 14 347 9479	T-Markt Logistics Ltd.	Hungary	36 26 525 500
Hydroturf Egypt LLC	Egypt	202 519 4308	Toro Australia	Australia	61 3 9580 7355
Irrimac	Portugal	351 21 238 8260	Toro Europe NV	Belgium	32 14 562 960
Irrigation Products Int'l Pvt Ltd.	India	0091 44 2449 4387	Valtech	Morocco	212 5 3766 3636
Jean Heybroek b.v.	Netherlands	31 30 639 4611	Victus Emak	Poland	48 61 823 8369

## European Privacy Notice

### The Information Toro Collects

Toro Warranty Company (Toro) respects your privacy. In order to process your warranty claim and contact you in the event of a product recall, we ask you to share certain personal information with us, either directly or through your local Toro company or dealer.

The Toro warranty system is hosted on servers located within the United States where privacy law may not provide the same protection as applies in your country.

BY SHARING YOUR PERSONAL INFORMATION WITH US, YOU ARE CONSENTING TO THE PROCESSING OF YOUR PERSONAL INFORMATION AS DESCRIBED IN THIS PRIVACY NOTICE.

### The Way Toro Uses Information

Toro may use your personal information to process warranty claims, to contact you in the event of a product recall and for any other purpose which we tell you about. Toro may share your information with Toro's affiliates, dealers or other business partners in connection with any of these activities. We will not sell your personal information to any other company. We reserve the right to disclose personal information in order to comply with applicable laws and with requests by the appropriate authorities, to operate our systems properly or for our own protection or that of other users.

### Retention of your Personal Information

We will keep your personal information as long as we need it for the purposes for which it was originally collected or for other legitimate purposes (such as regulatory compliance), or as required by applicable law.

### Toro's Commitment to Security of Your Personal Information

We take reasonable precautions in order to protect the security of your personal information. We also take steps to maintain the accuracy and current status of personal information.

### Access and Correction of your Personal Information

If you would like to review or correct your personal information, please contact us by email at [legal@toro.com](mailto:legal@toro.com).

## Australian Consumer Law

Australian customers will find details relating to the Australian Consumer Law either inside the box or at your local Toro Dealer.



# Toro General Commercial Product Warranty

## A Two-Year Limited Warranty

### Conditions and Products Covered

The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly warrant your Toro Commercial product ("Product") to be free from defects in materials or workmanship for two years or 1500 operational hours\*, whichever occurs first. This warranty is applicable to all products with the exception of Aerators (refer to separate warranty statements for these products). Where a warrantable condition exists, we will repair the Product at no cost to you including diagnostics, labor, parts, and transportation. This warranty begins on the date the Product is delivered to the original retail purchaser.

\* Product equipped with an hour meter.

### Instructions for Obtaining Warranty Service

You are responsible for notifying the Commercial Products Distributor or Authorized Commercial Products Dealer from whom you purchased the Product as soon as you believe a warrantable condition exists. If you need help locating a Commercial Products Distributor or Authorized Dealer, or if you have questions regarding your warranty rights or responsibilities, you may contact us at:

Toro Commercial Products Service Department  
Toro Warranty Company  
8111 Lyndale Avenue South  
Bloomington, MN 55420-1196  
  
952-888-8801 or 800-952-2740  
E-mail: commercial.warranty@toro.com

### Owner Responsibilities

As the Product owner, you are responsible for required maintenance and adjustments stated in your *Operator's Manual*. Failure to perform required maintenance and adjustments can be grounds for disallowing a warranty claim.

### Items and Conditions Not Covered

Not all product failures or malfunctions that occur during the warranty period are defects in materials or workmanship. This warranty does not cover the following:

- Product failures which result from the use of non-Toro replacement parts, or from installation and use of add-on, or modified non-Toro branded accessories and products. A separate warranty may be provided by the manufacturer of these items.
- Product failures which result from failure to perform recommended maintenance and/or adjustments. Failure to properly maintain your Toro product per the Recommended Maintenance listed in the *Operator's Manual* can result in claims for warranty being denied.
- Product failures which result from operating the Product in an abusive, negligent, or reckless manner.
- Parts subject to consumption through use unless found to be defective. Examples of parts which are consumed, or used up, during normal Product operation include, but are not limited to, brake pads and linings, clutch linings, blades, reels, rollers and bearings (sealed or greasable), bed knives, spark plugs, castor wheels and bearings, tires, filters, belts, and certain sprayer components such as diaphragms, nozzles, and check valves, etc.
- Failures caused by outside influence. Conditions considered to be outside influence include, but are not limited to, weather, storage practices, contamination, use of unapproved fuels, coolants, lubricants, additives, fertilizers, water, or chemicals, etc.
- Failure or performance issues due to the use of fuels (e.g. gasoline, diesel, or biodiesel) that do not conform to their respective industry standards.

- Normal noise, vibration, wear and tear, and deterioration.
- Normal "wear and tear" includes, but is not limited to, damage to seats due to wear or abrasion, worn painted surfaces, scratched decals or windows, etc.

### Parts

Parts scheduled for replacement as required maintenance are warranted for the period of time up to the scheduled replacement time for that part. Parts replaced under this warranty are covered for the duration of the original product warranty and become the property of Toro. Toro will make the final decision whether to repair any existing part or assembly or replace it. Toro may use remanufactured parts for warranty repairs.

### Deep Cycle and Lithium-Ion Battery Warranty:

Deep cycle and Lithium-Ion batteries have a specified total number of kilowatt-hours they can deliver during their lifetime. Operating, recharging, and maintenance techniques can extend or reduce total battery life. As the batteries in this product are consumed, the amount of useful work between charging intervals will slowly decrease until the battery is completely worn out. Replacement of worn out batteries, due to normal consumption, is the responsibility of the product owner. Battery replacement may be required during the normal product warranty period at owner's expense. Note: (Lithium-Ion battery only): A Lithium-Ion battery has a part only prorated warranty beginning year 3 through year 5 based on the time in service and kilowatt hours used. Refer to the *Operator's Manual* for additional information.

### Maintenance is at Owner's Expense

Engine tune-up, lubrication, cleaning and polishing, replacement of filters, coolant, and completing recommended maintenance are some of the normal services Toro products require that are at the owner's expense.

### General Conditions

Repair by an Authorized Toro Distributor or Dealer is your sole remedy under this warranty.

**Neither The Toro Company nor Toro Warranty Company is liable for indirect, incidental or consequential damages in connection with the use of the Toro Products covered by this warranty, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under this warranty. Except for the Emissions warranty referenced below, if applicable, there is no other express warranty. All implied warranties of merchantability and fitness for use are limited to the duration of this express warranty.**

Some states do not allow exclusions of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

### Note regarding engine warranty:

The Emissions Control System on your Product may be covered by a separate warranty meeting requirements established by the U.S. Environmental Protection Agency (EPA) and/or the California Air Resources Board (CARB). The hour limitations set forth above do not apply to the Emissions Control System Warranty. Refer to the Engine Emission Control Warranty Statement supplied with your product or contained in the engine manufacturer's documentation for details.

### Countries Other than the United States or Canada

Customers who have purchased Toro products exported from the United States or Canada should contact their Toro Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the Toro importer.